
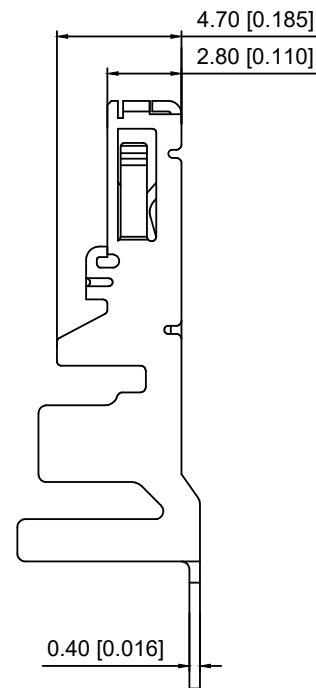


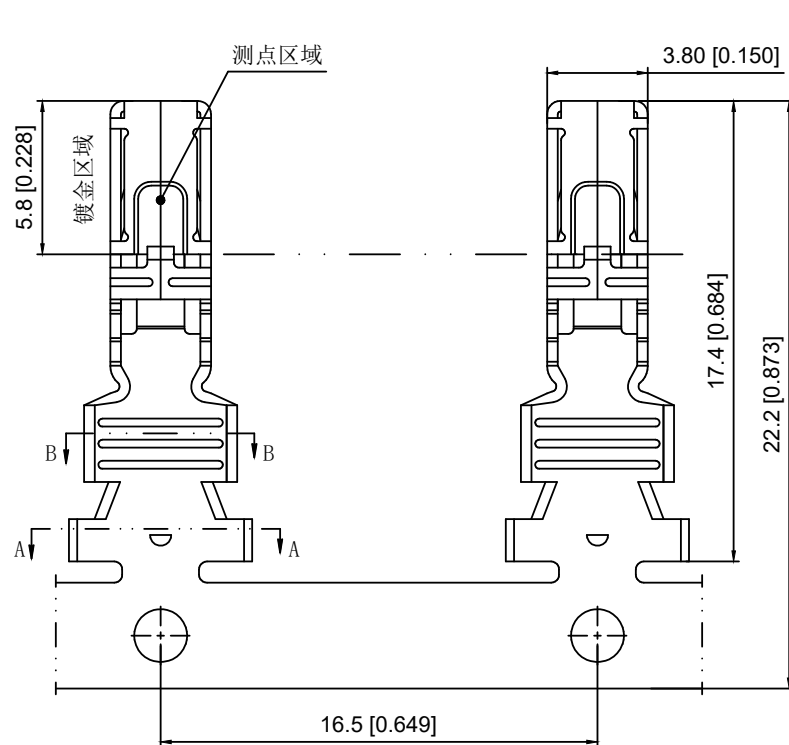

Specifications:

规格:

Voltage rating:600V AC/DC

额定电压: 600V AC/DC

Withstanding voltage:2500V AC/minute

耐受电压: 2500V AC/分钟

Temperature range:-40℃~+125℃

温度范围: -40℃~+125℃

Insulation resistance:1000MΩ min

绝缘电阻: 1000MΩ Min

Contact resistance:5mΩ Max

接触电阻: 5mΩ Max

K 792100 T - P SN - H

① ② ③ ④ ⑤ ⑥

1.K: XKBTEK-Car Connector

2.XKB Series No


3.Category:T-Terminal

4.Material:P-Phosphor Bronze


5.Plating:SN-Tin Plated over Nickel

V01-Gold Flash ;AuSn-Terminal half-AuSn

6.Special No:H-High foot ;L-Low foot



SEC: A-A



SEC: B-B

K792100T-PXX-H	7.00	6.80	6.00	5.60
K792100T-PXX-L	4.40	5.20	3.90	4.00
PART NO	DIM A	DIM B	DIM C	DIM D

Poles	10 AWG	12 AWG	14 AWG	16 AWG
01	30 A	25 A	20 A	15 A
02	25 A	20 A	18 A	15 A
03	25 A	20 A	18 A	15 A
04	22 A	18 A	15 A	13 A
05	22 A	18 A	15 A	13 A

K792100T-PSN-H	Phosphor Bronze	AWG#10~12	K792100T
K792100T-PSN-L	Phosphor Bronze	AWG#14~16	
PART NO	Material	Wire Range	Suitable XKB Housing

DSND	SCALE: N/A	MODEL TYPE: 7.92mm Automobile connector
DWN	VIEW:	PART NO.: K792100T-PSN-H
CHKD	UNIT: mm/in	DWG NO.: X-K792100T-PSN-H
APPD	SIZE: A4	

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
Δx					ANGLAR ±5°
Δx					L ≤ 4 ±0.2
Δx					4 < L ≤ 16 ±0.3
					16 < L ≤ 63 ±0.4
					L > 63 ±0.5
REVISIONS					
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn					

XKB

XKB INDUSTRIAL PRECISION CO.,LIMITED

WEIGHT	SHEET	REVISION
	1/1	A0