

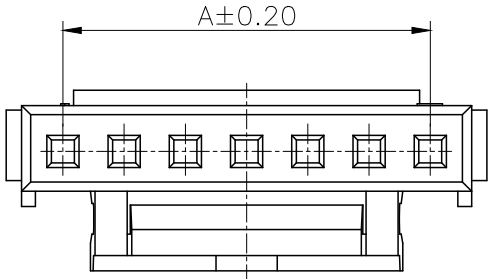
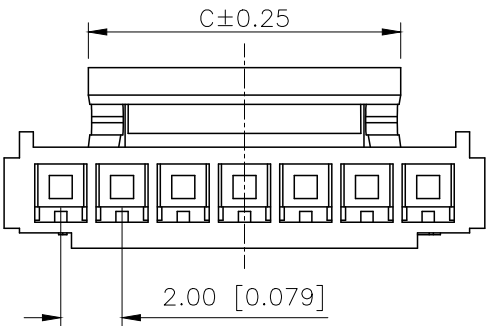
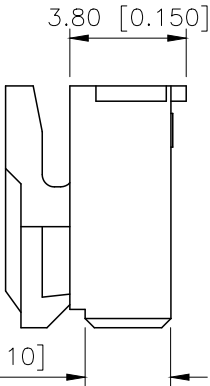
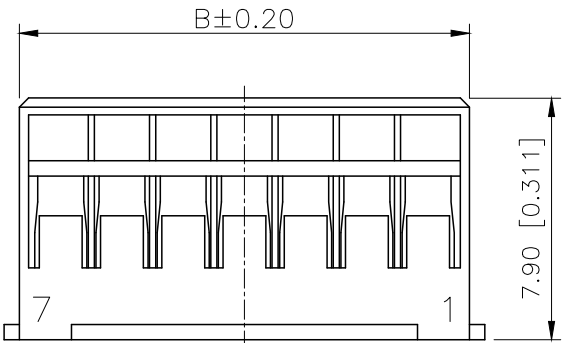


| REVISIONS |         |          |                        |           |        |
|-----------|---------|----------|------------------------|-----------|--------|
| REV.      | ECN NO. | LOCATION | DESCRIPTION            | DATE      | DESIGN |
| A0        | N/A     |          | INITIAL RELEASE        | /         | /      |
| A1        | N/A     |          | 图面新增2PIN卡扣样式说明, 升级整理图面 | 2024.9.25 | 阿树     |

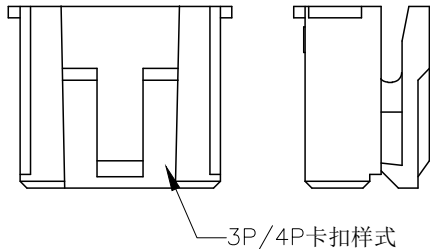

■SPECIFICATIONS

- Voltage rating:250V AC/DC
- Current rating:2A AC/DC
- Withstanding Voltage:800V AC/minute
- Temperature range:-40°C~+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤20mΩ
- Applicable Wire:30~24AWG

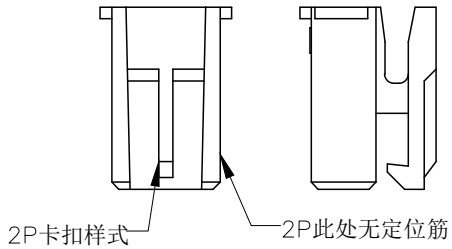

PART NO.:

X2011 H M-14 A-N0  
① ② ③ ④ ⑤ ⑥

- ①Series No  
②Category:H-HSG  
③Category:M-Male Housing  
④Row No.Pin No:XX-02~15Pin  
⑤Plug the Pin &Special No.:A-No Lock  
⑥Material:N0-PA66 UL94V-0

| Poles | Dimensions(mm) |       |       | Poles | Dimensions(mm) |       |       |
|-------|----------------|-------|-------|-------|----------------|-------|-------|
|       | A              | B     | C     |       | A              | B     | C     |
| 02    | 2.00           | 4.70  | 3.30  | 10    | 18.00          | 20.70 | 12.30 |
| 03    | 4.00           | 6.70  | 3.30  | 11    | 20.00          | 22.70 | 16.30 |
| 04    | 6.00           | 8.70  | 4.30  | 12    | 22.00          | 24.70 | 16.30 |
| 05    | 8.00           | 10.70 | 4.30  | 13    | 24.00          | 26.70 | 16.30 |
| 06    | 10.00          | 12.70 | 8.30  | 14    | 26.00          | 28.70 | 16.30 |
| 07    | 12.00          | 14.70 | 10.30 | 15    | 28.00          | 30.70 | 16.30 |
| 08    | 14.00          | 16.70 | 10.30 | 16    | 30.00          | 32.70 | 16.30 |
| 09    | 16.00          | 18.70 | 10.30 |       |                |       |       |

|                |          |                    |                       |
|----------------|----------|--------------------|-----------------------|
| X2011HM-14A-N0 | PA66     | X2011W             | X2011TF               |
| PART NO        | Material | Suitable XKB Wafer | Suitable XKB Terminal |

|                        |       |
|------------------------|-------|
| AuGLAR                 | ±5°   |
| X.                     | ±0.40 |
| X.x                    | ±0.30 |
| X.xx                   | ±0.20 |
| X.xxx                  | ±0.15 |
| UNSPECIFIED TOLERAuCES |       |



|          |    |             |                                             |
|----------|----|-------------|---------------------------------------------|
| DESIGN   | 阿树 | VIEW:       | MODEL TYPE:<br>2.00mm Crimp Style Connector |
| CHECKED  |    | UNIT: mm/in | PART NO.:<br>X2011HM-14A-N0                 |
| APPROVED |    | SIZE: A4    | DWG NO.:                                    |

XKB INDUSTRIAL PRECISION CO.,LIMITED

|       |      |          |
|-------|------|----------|
| SCALE | PAGE | REVISION |
| N/A   | 1/1  | A1       |