

Printview: Open diode gate with 9 diodes 1N 5408; including mounting carrier for DIN 35 rail; can be connected individually; 2 connections per diode - Item No.: 289-105



**Open diode gate with 9 diodes 1N 5408; including mounting carrier for DIN 35 rail; can be connected individually; 2 connections per diode**

Item No.: 289-105



Open diode gate with 9 diodes 1N 5408; including mounting carrier for DIN 35 rail; can be connected individually; 2 connections per diode

### Marking

RoHS   
Compliant

### Business data

Supplier	WAGO
Item no.	289-105
GTIN / EAN	4045454198282
Content	1
Order amount	1
Customer item number	

### Notes

\* Max. admissible current acc. to the manufacturer's data sheet. With all diodes loaded, the continuous current must be reduced.

### Technical data

#### Miscellaneous


Pollution degree	2
Rated voltage [V]	250 [V]
Rated impulse voltage [kV]	4 [kV]

Printview: Open diode gate with 9 diodes 1N 5408; including mounting carrier for DIN 35 rail; can be connected individually; 2 connections per diode - Item No.: 289-105

<b>Technical data</b>	
<i>Connection technology 1</i>	<i>WAGO 236 Series</i>
<i>Operating voltage</i>	<i>250 V AC/DC</i>
<i>Ambient operating temperature</i>	<i>-25 °C ... +40 °C</i>
<i>Peak reverse voltage [V]</i>	<i>1000 [V]</i>
<i>Rectified current for each diode * [A]</i>	<i>3 [A]</i>
<i>Rectified current for each diode [µA]</i>	<i>10 [µA]</i>
<i>Forward voltage for each Diode [V]</i>	<i>1.3 [V]</i>
<i>Forward current (resistent) for each diode [A]</i>	<i>3 [A]</i>
<i>Connection technology</i>	<i>CAGE CLAMP®</i>
<i>Solid conductors, tool-operated termination</i>	<i>0.08 ... 2.5 mm<sup>2</sup> / 28 ... 12 AWG</i>
<i>Strip length</i>	<i>5 ... 6 mm / 0.2 ... 0.24 inch</i>
<i>Weight [g]</i>	<i>80.64 [g]</i>
<i>Width</i>	<i>51 mm / 2.008 in.</i>
<i>Height from upper-edge of DIN-35 rail</i>	<i>48 mm / 1.89 in.</i>
<i>Depth</i>	<i>85 mm / 3.346 in.</i>
<i>Type of mounting</i>	<i>Carrier rail via adapter (accessories)</i>

Printview: Open diode gate with 9 diodes 1N 5408; including mounting carrier for DIN 35 rail; can be connected individually; 2 connections per diode - Item No.: 289-105

### Images & drawings

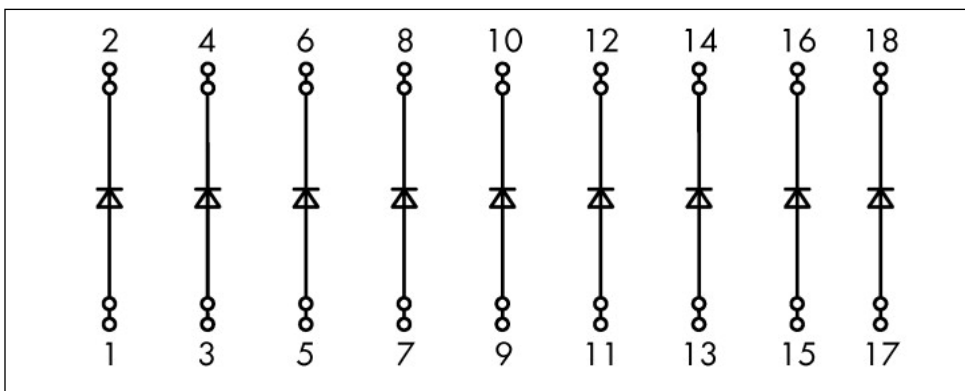

Printview: Open diode gate with 9 diodes 1N 5408; including mounting carrier for DIN 35 rail; can be connected individually; 2 connections per diode - Item No.: 289-105

---

## Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.