

1




2

3



4

REVISIONS

REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.07.01	阿树

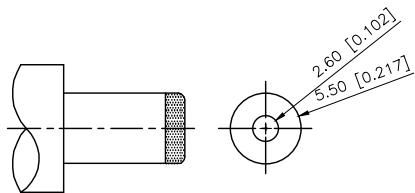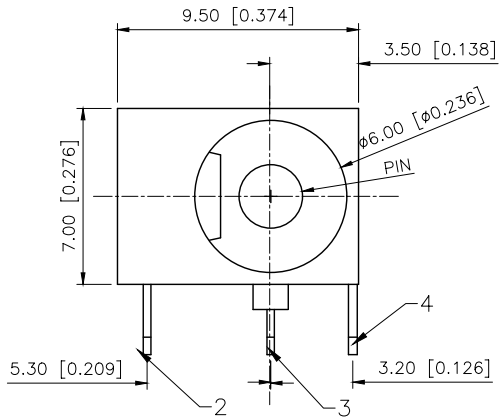

MATING PLUG
Jack Insertion Depth: 8.2 mm

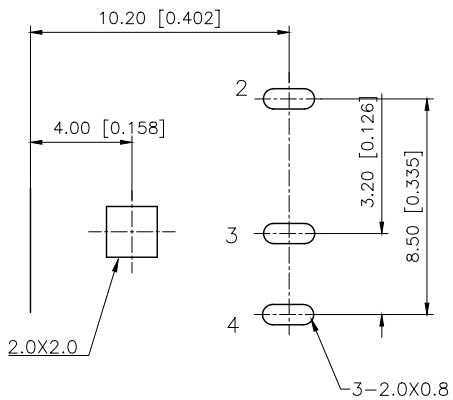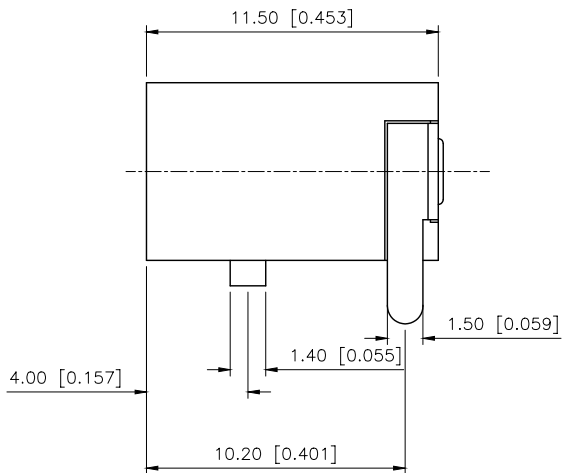

P.C.B LAYOUT

SCHEMATIC	
Model	DC-0440-2.5A
Center Pin	Ø1.65 mm Ø2.0 mm Ø2.5 mm

Terminal 3	Brass	Silver
Terminal 2	Phosphor Bronze	Silver
Terminal 1	Brass	Silver
Center pin	Brass	Silver
Plastic	PBT	
PAPT NAMF	MATERIAL	PLATING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: DC POWER JACK
CHECKED		UNIT: mm/in	PART NO.: DC-0440-2.5A-2.0
APPROVED		SIZE: A4	DWG NO.: DC-0440-2.5A-2.0

SCALE	PAGE	REVISION
N/A	1/1	A1

www.helloxkb.comwww.helloxkb.cnwww.xk-dg.cn

XKB INDUSTRIAL PRECISION CO.,LIMITED

1

2

3

4