

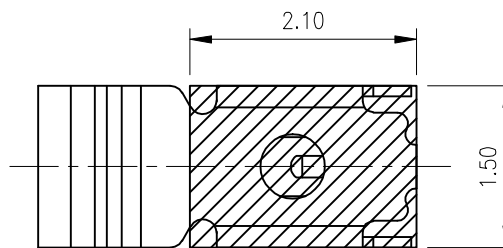
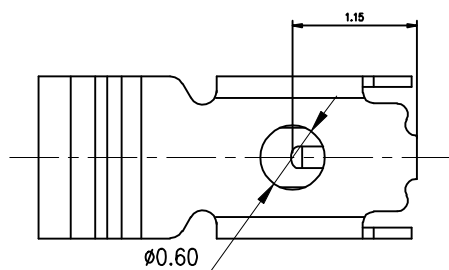



1. 材质: 不锈钢SUS301, $T=0.10 \pm 0.005$;
2. 端子锡脚焊接面和接触面不可有毛边, 其他部位毛边最大 0.03mm ;
3. 扭曲: $45^\circ/1000\text{mm}$, 拱形 $5\text{mm}/1000\text{mm}$;
4. 标示有“▼”符号的为重点控制和检验尺寸;
5. 未标注之R MAX R0.13;
6. 电镀须满足48小时盐雾测试;
7. 寿命测试 >2 万次, 产品弹力要求在 $60\text{gf} \sim 80\text{gf}$ 之间
8. 镍底 $50 \sim 80\mu\text{min}$, 焊接区域镀金, 接触区域镀金 $1\mu\text{min}$

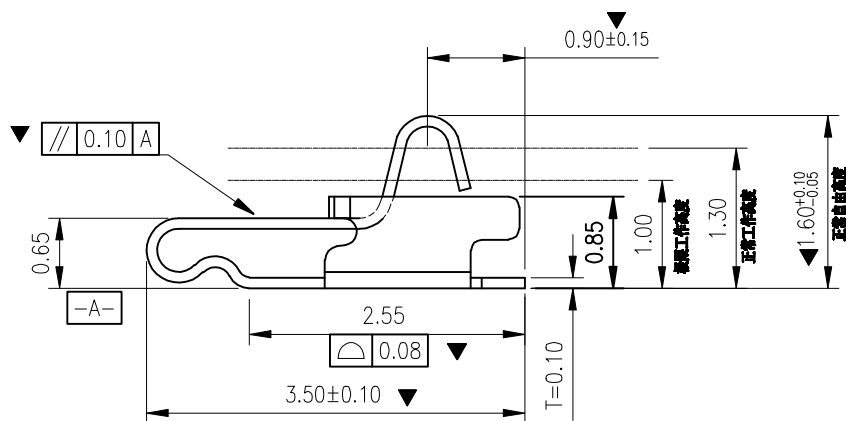

尺寸公差 ± 0.05

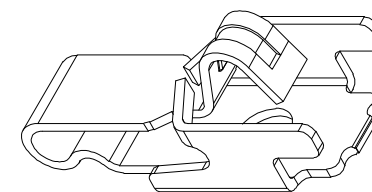

3D图