

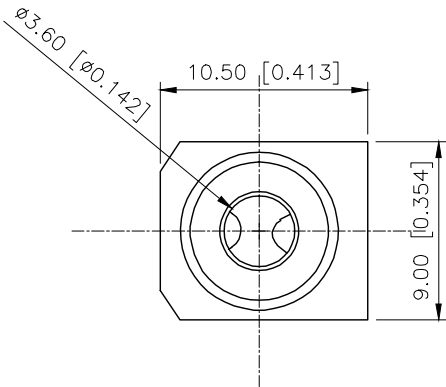
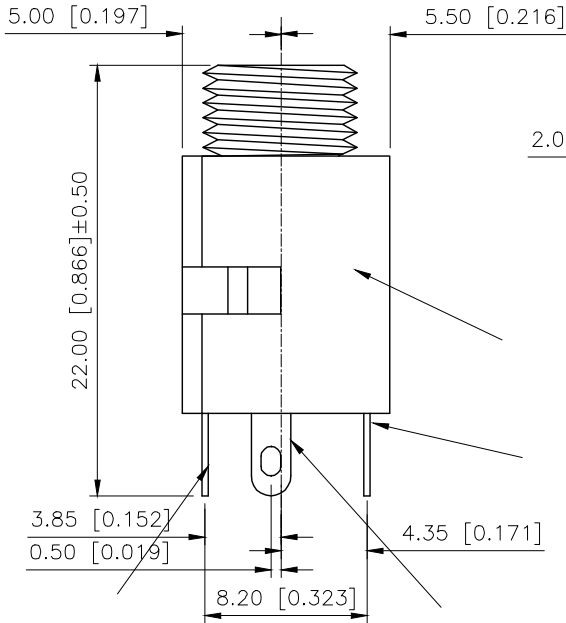
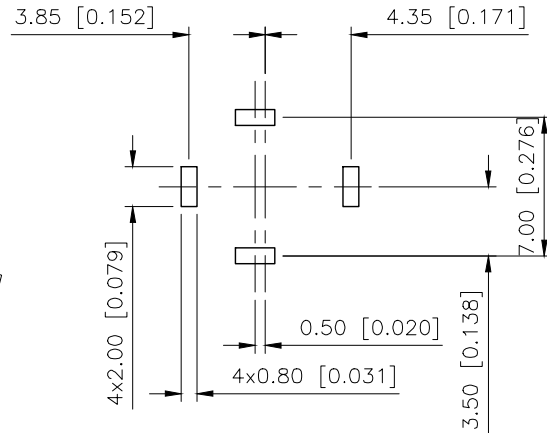


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A			2024.9.11	

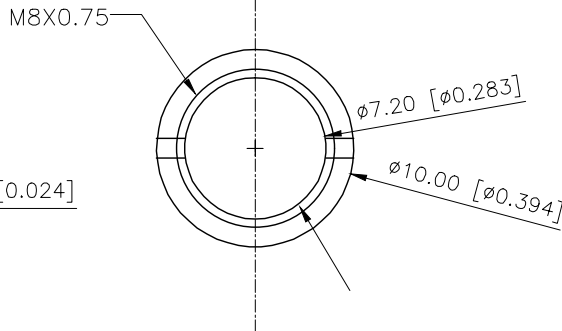


SPECIFICATIONS:
Rating 12V DC 1A
Contact resistance ≤30mΩ
Insulation resistance ≥50MΩ DC100V
Withstanding voltage AC 500V
R.M.A.FOR 1MINUTE
Plugging force 3~20N
Life test 5000 CYCLES

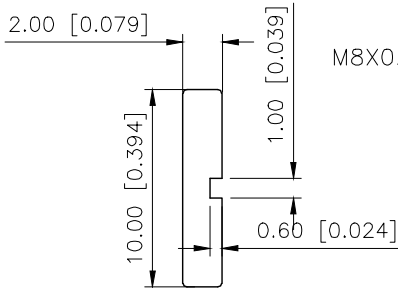

PCB LAYOUT TOP VIEW

SCHEMATIC

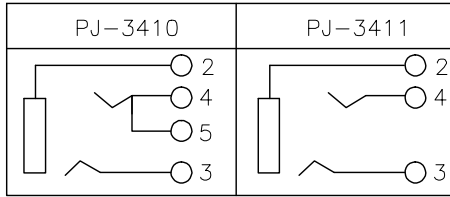

5	5# Terminal	1	Brass	T=0.30
4	4# Terminal	1	Phosphor Bronze	T=0.30
3	3# Terminal	1	Phosphor Bronze	T=0.30
2	2# Terminal	1	Phosphor Bronze	T=0.25
1	Housing	1	PBT	Black
NO	PRART NAME	QTY	MATERIAL	SPECIFICATIONS

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN		VIEW:	MODEL TYPE:
CHECKED		UNIT: mm/in	3.5 PHONE JACK
APPROVED		SIZE: A4	PART NO.: PJ-3410
		DWG NO.:	