





1

2

3

4

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		额定电流变更, 图面升级整理图面	2024.9.24	阿树

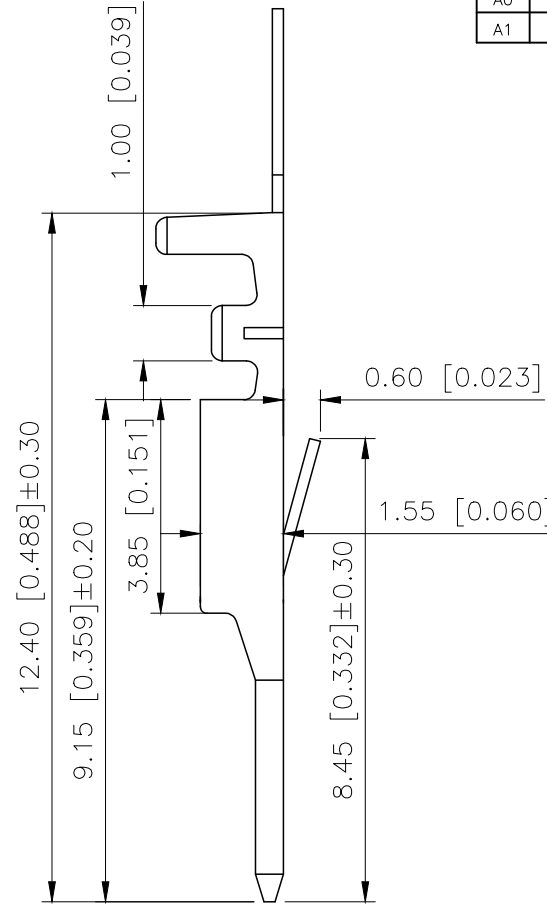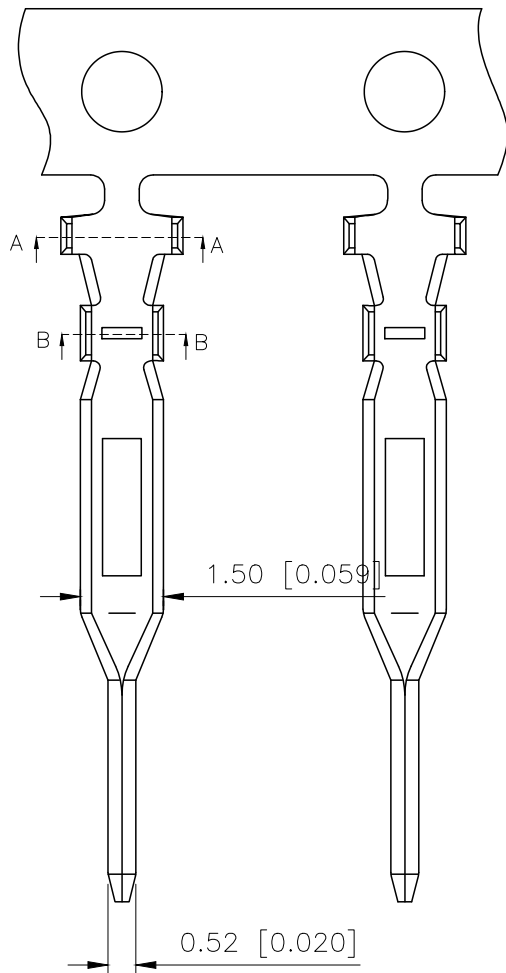

■SPECIFICATIONS

- Voltage rating:250V AC/DC
- Current rating:2A AC/DC
- Withstanding Voltage:800V AC/minute
- Temperature range:-40°C~+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤20mΩ

PART NO.:

X2011 ① T ② M-P ③ SN-A ④ ⑤ ⑥

- ①Series Number.
②Category: T-terminal
③Shape:M-Male Terminal
④Material: P-Phosphor bronze
⑤Plating Category:SN-Bright Tin Plating
⑥TYPE:A Type

X2011TM-PSN-A	Phosphor Bronze	AWG#30~24	X2011HF
PART NO	Material	Wire Range	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 2.00mm Crimp Style Connector
CHECKED		UNIT: mm/in	PART NO.: X2011TM-PSN-A
APPROVED		SIZE: A4	DWG NO.:

1

2

3

4