
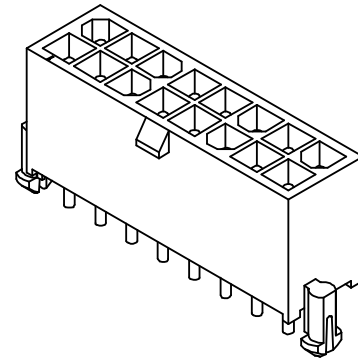


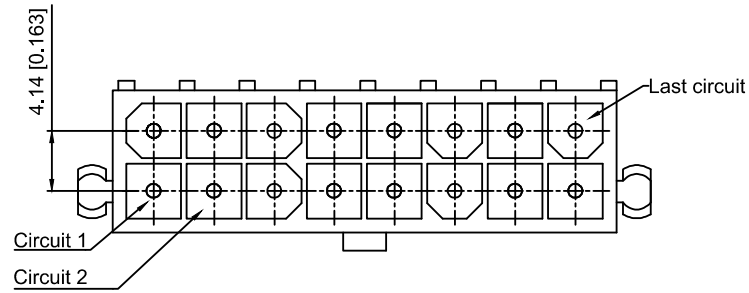

Specifications:

规格:

Voltage rating:600V AC/DC

额定电压: 600V AC/DC

Current rating:7A AC/DC

额定电流: 7A AC/DC

Withstanding voltage:1500V AC/minute

耐受电压: 1500V AC/分钟

Temperature range:-40℃~+125℃



温度范围: -40℃~+125℃

Insulation resistance:1000MΩ min

绝缘电阻: 1000MΩ min

Contact resistance:20mΩ max

接触电阻: 20mΩ max

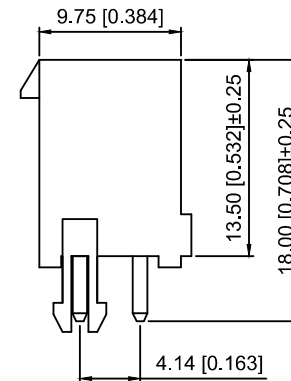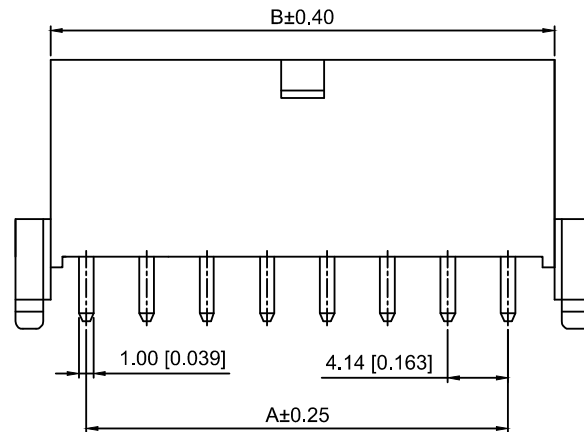

X4140 W V - 2x08 S- N0 SN

① ② ③ ④ ⑤ ⑥ ⑦

1.Series No

2.Category:W-Wafer

3.Wed ding Board Angle:V-Stight 180°


4.Row No.Pin No:2xXX-2x07~2x12P

5.Special No:S-No Positioning

6.Material:N0-PA66 94V-0

7.Plating:SN-Tin Plated

Poles	Dimensions(mm)	
	A	B
2x07	24.84	30.56
2x08	28.98	34.70
2x09	33.12	38.84
2x10	37.26	42.98
2x11	41.40	47.12
2x12	45.54	51.26

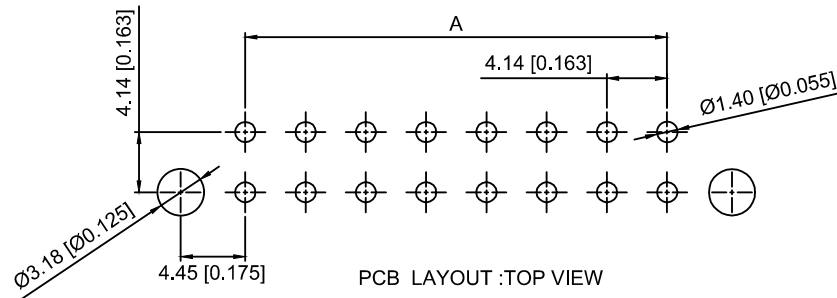


X4140WV-2x08S-N0SN	PA66	Brass	X4140HM
PART N0	Material	Material(Pin)	Suitable XKB Housing

ΔX	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ΔX					
ΔX					
MARK					


XKB

XKB INDUSTRIAL PRECISION CO.,LIMITED


DSND		SCALE: N/A	MODEL TYPE: 4.14mm Crimp Style Connector		
DWN		VIEW: 	PART NO.: X4140WV-2x08S-N0SN		
CHKD		UNIT: mm/in	DWG NO.: X-X4140WV-2x08S-N0SN		
APPD		SIZE: A4			
PRECISION CO.,LIMITED			WEIGHT	SHEET	REVISION
				1/1	A0

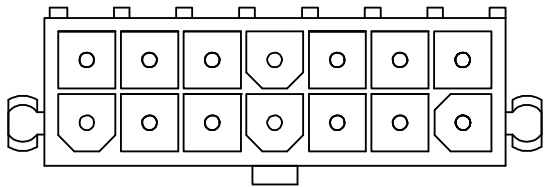


2x07P

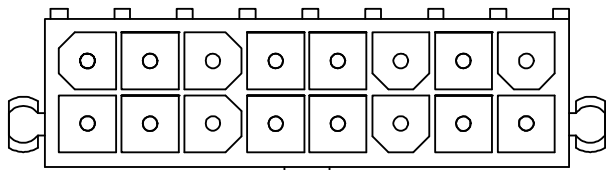


2x08P

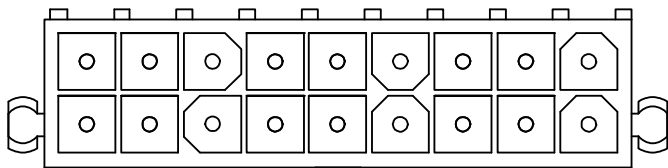


2x09P

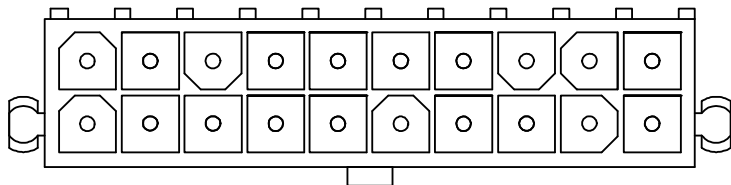

2x10P

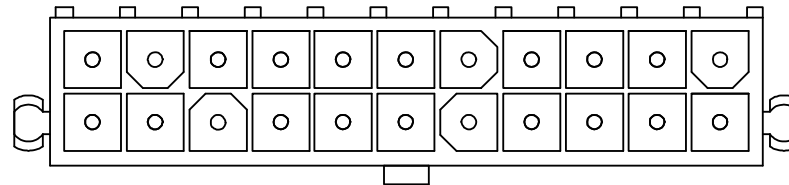

2x11P

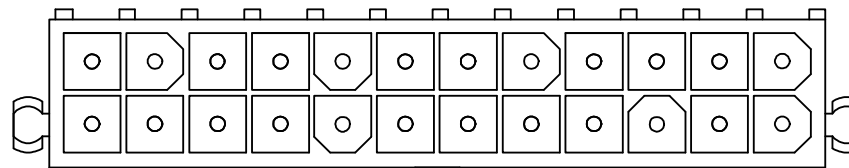

2x12P

					ANGLAR	±5°
Δx					L≤ 4	±0.2
Δx					4<L≤ 16	±0.3
Δx					16<L≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn						



XKB INDUSTRIAL PRECISION CO.,LIMITED

DSND		SCALE: N/A	MODEL TYPE: 4.14mm Crimp Style Connector		
DWN		VIEW: 	PART NO.: X4140WV-2x08S-N0SN		
CHKD		UNIT: mm/in	DWG NO.: X-X4140WV-2x08S-N0SN		
APPD		SIZE: A4	WEIGHT	SHEET	REVISION
PRECISION CO.,LIMITED				1/1	A0