

## Interface module - VIP-2/PT/HD15SUB/F - 2904272


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module, with push-in connection and high density D-SUB miniature socket strip, for mounting on NS 35, no. of pos.: 15



### Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 814812
GTIN	4046356814812

### Technical data

#### Dimensions

Width	46.9 mm
Height	72.1 mm
Depth	46.6 mm

#### Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

#### General

Nominal voltage $U_N$	25 V AC
	60 V DC
Max. perm. current (per branch)	1 A
Number of positions	15
Status display	No
Mounting position	any

#### Connection data

Connection name	Field level
Connection in acc. with standard	IEC / EN

## Interface module - VIP-2/PT/HD15SUB/F - 2904272

### Technical data

#### Connection data

Connection method	Push-in connection
Stripping length	8 mm
Screw thread	M3
Number of positions	15
Conductor cross section solid	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section flexible	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section AWG	24 ... 12

#### Connection data 2

Connection name	Controller level
Connection method	High-density D-SUB socket strip
Number of connections	1
Number of positions	15

#### Standards and Regulations

Connection in acc. with standard	CSA
Standards/regulations	EN 50178
Rated surge voltage	1.2 kV
Pollution degree	2
Overvoltage category	II


#### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"


### Drawings

# Interface module - VIP-2/PT/HD15SUB/F - 2904272

Dimensional drawing

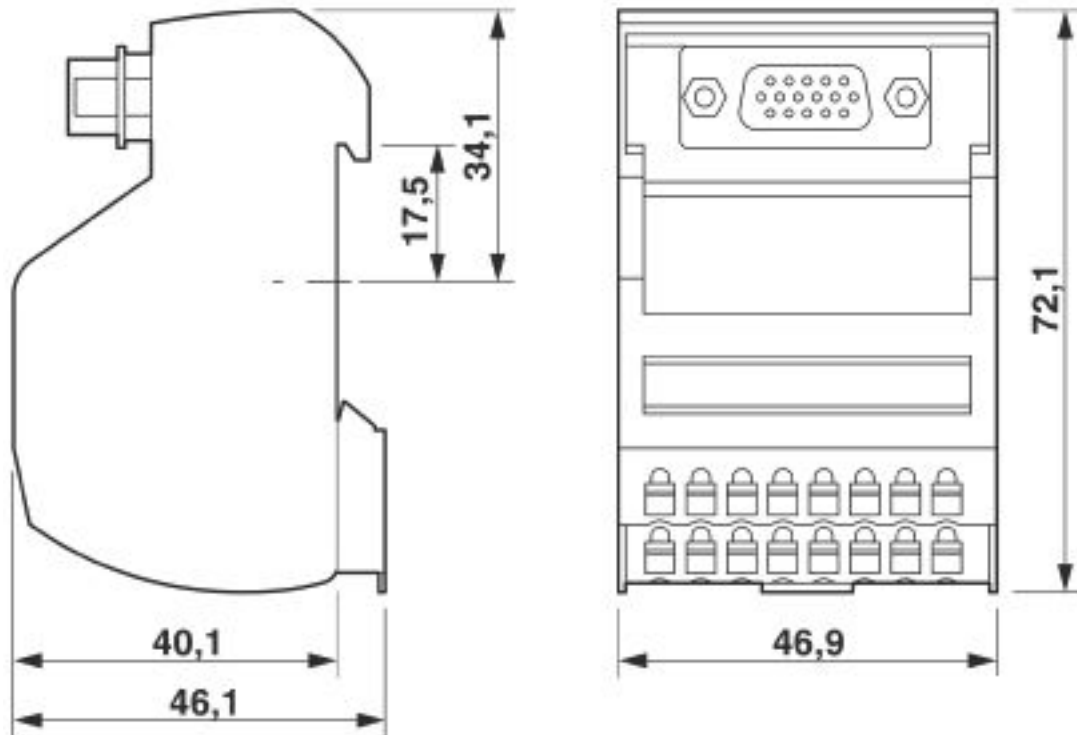

Circuit diagram

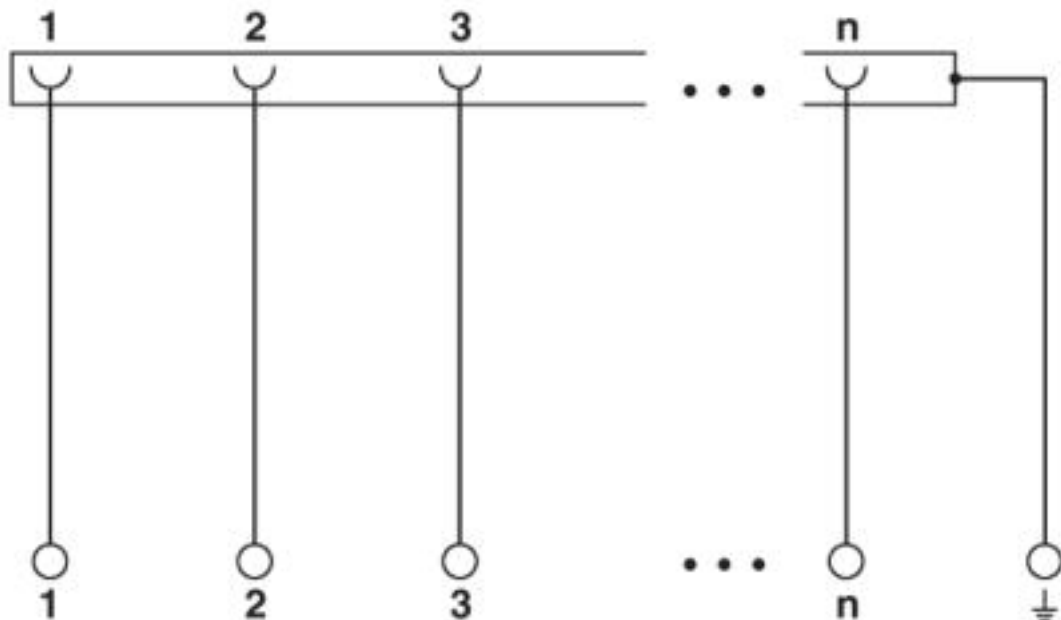

Universal circuit diagram

# Interface module - VIP-2/PT/HD15SUB/F - 2904272

## Approvals

### Approvals

#### Approvals

CSA / UL Recognized / cUL Recognized / CSAus / EAC / cULus Recognized / cCSAus

#### Ex Approvals

### Approval details

CSA		<a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a>	2122203
Nominal voltage UN		105 V	
Nominal current IN		1 A	
mm <sup>2</sup> /AWG/kcmil		26-14	


UL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 238705
Nominal voltage UN		125 V	
Nominal current IN		1 A	
mm <sup>2</sup> /AWG/kcmil		26-14	

cUL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 238705
Nominal voltage UN		125 V	
Nominal current IN		1 A	
mm <sup>2</sup> /AWG/kcmil		26-14	

CSAus		<a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a>	2122203
Nominal voltage UN		105 V	
Nominal current IN		1 A	
mm <sup>2</sup> /AWG/kcmil		28-14	

## Interface module - VIP-2/PT/HD15SUB/F - 2904272

### Approvals



Phoenix Contact 2019 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>