
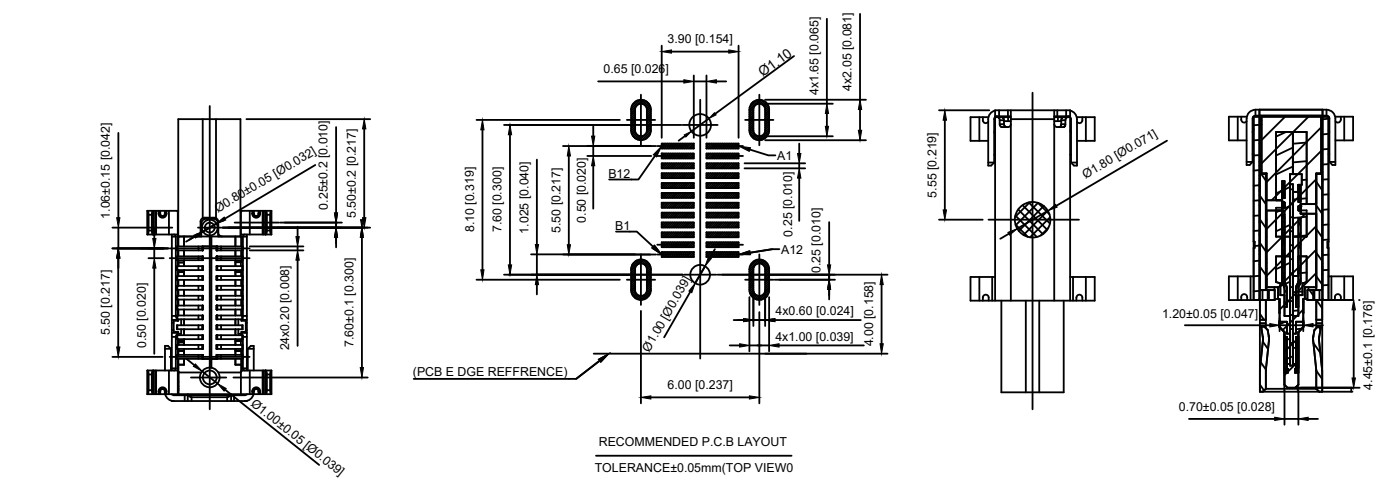


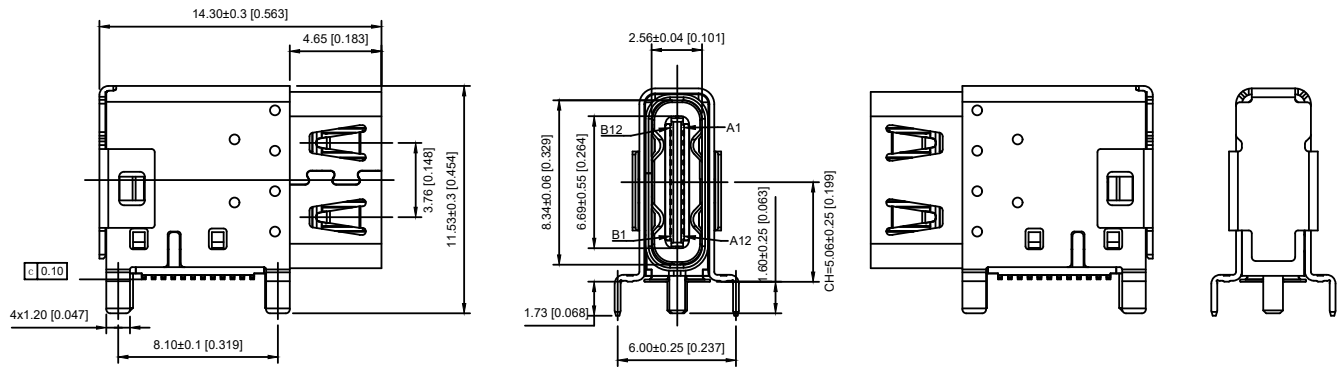

- 备注 NOTES:
- 1.材质 Material:
  - 1.1胶芯 Plastic core: LCP
  - 1.2端子 Terminal: C18140, T=0.15mm; Nickel base,gold plated
  - 1.3外壳 shell: SUS, T=0.30mm; Nickel plated on the surface
  - 1.4卡片 shell fragment: SUS, T=0.15mm;
  - 2.电气特性 ELECTRICAL CHARACTERISTIC:
  - 2.1额定电流 Rated current: 5A
  - 2.2接触阻抗 Contact resistance: 40mΩ MAX
  - 2.3绝缘阻抗 Insulation resistance: 100MΩ MIN 250V DC
  - 2.4耐压 WITHSTANDING VOLTAGE: 100V AC
  - 2.5沾锡性: 温度245±5℃, 时间5±0.5s
  - 2.6插入力 INSERTION FORCE: 2.0kgf MAX  
拔出力 EXTRACTION FORCE:0.6kgf MIN
  - 2.7使用寿命 Service life: 10,000次
  - 2.8工作温度 Operating temperature: -40℃~+120℃

|     |             |     |             |
|-----|-------------|-----|-------------|
| A1  | GND         | B21 | GND         |
| A2  | SSTXP1      | B11 | SSRXP1      |
| A3  | SSTXN1      | B10 | SSRXN1      |
| A4  | VBUS        | B9  | VBUS        |
| A5  | CC1         | B8  | SBU2        |
| A6  | DP1         | B7  | DN2         |
| A7  | DN1         | B6  | DP2         |
| A8  | SBU1        | B5  | CC2         |
| A9  | VBUS        | B4  | VBUS        |
| A10 | SSRXN2      | B3  | SSTXN2      |
| A11 | SSRXP2      | B2  | SSTXP2      |
| A12 | GND         | B1  | GND         |
| PIN | SIGNAL NAME | PIN | SIGNAL NAME |

U264-2430N-4BSK00

- 01:AU 1U"Min  
03:AU 3U"Min  
05:AU 5U"Min  
10:AU 10U"Min  
15:AU 15U"Min  
30: AU 30U"Min
- 1:PBT  
2:PA6T  
3:PA9T  
4:LCP
- W:WHITE  
B:BLACK

|                                               |             |  |  |      |          |          |                                                                                       |      |                                      |                                                                                             |                                 |       |          |
|-----------------------------------------------|-------------|--|--|------|----------|----------|---------------------------------------------------------------------------------------|------|--------------------------------------|---------------------------------------------------------------------------------------------|---------------------------------|-------|----------|
|                                               |             |  |  |      |          |          | DSND                                                                                  |      | SCALE: N/A                           | MODEL TYPE:<br>3.1 TYPE C                                                                   |                                 |       |          |
|                                               |             |  |  |      | ANGLAR   | ±5°      |  | DWN  |                                      | VIEW:  | PART NO.:<br>U264-2430N-4BSK00  |       |          |
| Δx                                            |             |  |  |      | L≤ 4     | ±0.2     |                                                                                       | CHKD |                                      | UNIT: mm/in                                                                                 | DWG NO.:<br>X-U264-2430N-4BSK00 |       |          |
| Δx                                            |             |  |  |      | 4<L≤ 16  | ±0.3     |                                                                                       | APPD |                                      | SIZE: A4                                                                                    |                                 |       |          |
| Δx                                            |             |  |  |      | 16<L≤ 63 | ±0.4     |                                                                                       |      |                                      |                                                                                             |                                 |       |          |
| MARK                                          | DESCRIPTION |  |  | DATE | REVISED  | APPROVED | L> 63                                                                                 | ±0.5 |                                      |                                                                                             |                                 |       |          |
| REVISIONS                                     |             |  |  |      |          |          | UNSPECIFIED TOLERANCES                                                                |      | XKB INDUSTRIAL PRECISION CO.,LIMITED |                                                                                             |                                 |       |          |
| www.helloxkb.com www.helloxkb.cn www.xk-dg.cn |             |  |  |      |          |          |                                                                                       |      |                                      |                                                                                             |                                 |       |          |
|                                               |             |  |  |      |          |          |                                                                                       |      |                                      |                                                                                             | WEIGHT                          | SHEET | REVISION |
|                                               |             |  |  |      |          |          |                                                                                       |      |                                      |                                                                                             |                                 | 1/1   | A0       |