
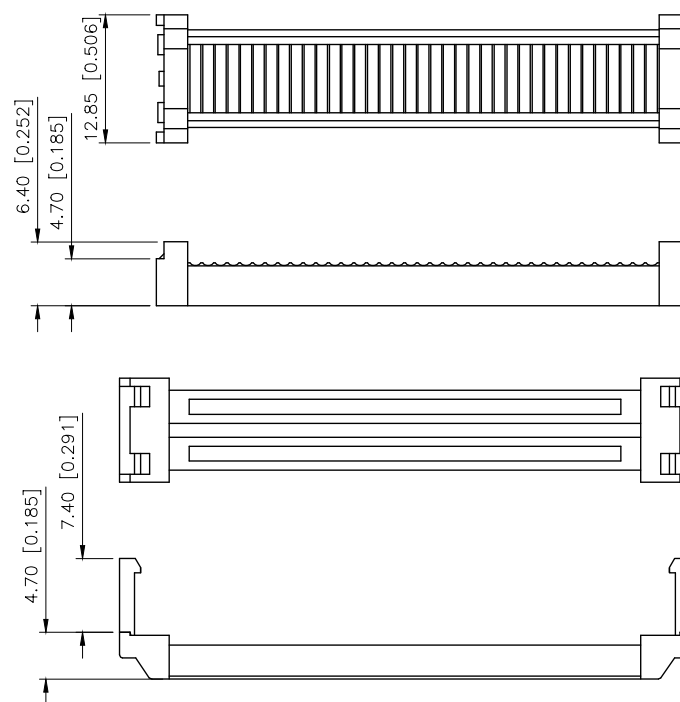


|      |           |          |                 |            |        |
|------|-----------|----------|-----------------|------------|--------|
|      | REVISIONS |          |                 |            |        |
| REV. | ECN NO.   | LOCATION | DESCRIPTION     | DATE       | DESIGN |
| A0   | N/A       |          | INITIAL RELEASE | /          | /      |
| A1   | N/A       |          | 图面升级整理图面        | 2025.05.23 | 阿树     |

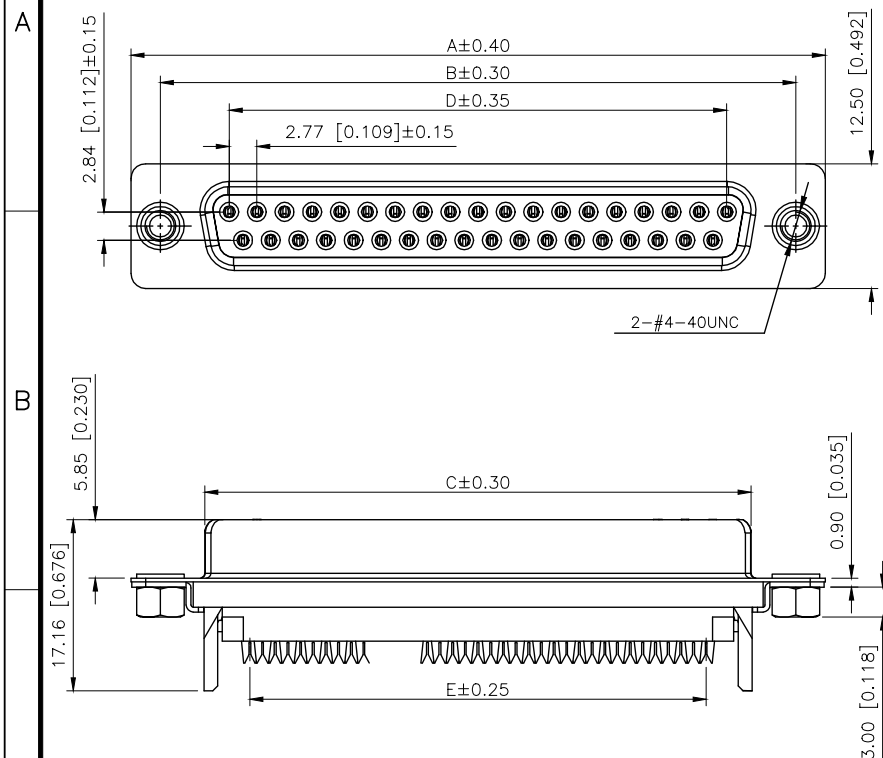

Specifications:

规格:

- 1.Voltage rating:250VAC/DC  
额定电压: 250V AC/DC
- 2.Current rating:1A AC/DC  
额定电流: 1A AC/DC
- 3.Withstanding voltage:500V AC/minute  
耐受电压:  $\geq 500V$  AC/分钟
- 4.Temperature range:-40℃-+105℃  
温度范围: -40℃-+105℃
- 5.Insulation resistance:1000MΩMIN  
绝缘电阻:  $\geq 1000\Omega$
- 6.Contact resistance:20mΩMax  
接触电阻:  $\geq 20m\Omega$

Material:

- 7.Rubber core:PBT UL94V-0  
胶芯: PBT UL94V-0
- 8.The iron shell:SPCC Nivkel Plating/Tin Plating  
铁壳: SPCC, 镀镍/镀锡

B、成品不能有弯针, R角不一致等不良。

PART NO.:

X08 09 F T 7 BL 3  
① ② ③ ④ ⑤ ⑥ ⑦

①Series NO.  
②Row No.Pin No.XX-09;15;25;37  
③Welding Board Angle :F-Female  
④T: Tradotional C: Car-pin  
⑤Planting Catogtry: 1:1U' 2:2U' 3:3U' 4:5U'  
5:15U' 6:30U' 7:AU Sn  
⑥Color:B-BLACK W-White BL-Blue  
⑦3:TYPE-3;

| NUMBER OF POSITIONS | DIMENSION |        |        |        |        |
|---------------------|-----------|--------|--------|--------|--------|
|                     | A±0.40    | B±0.30 | C±0.30 | D±0.25 | E±0.25 |
| 9                   | 30.80     | 25.00  | 16.35  | 11.08  | 10.16  |
| 15                  | 39.14     | 33.30  | 24.75  | 19.39  | 17.78  |
| 25                  | 53.05     | 47.04  | 38.35  | 33.24  | 30.38  |
| 37                  | 69.32     | 63.50  | 54.75  | 49.86  | 45.72  |

|            |       |       |
|------------|-------|-------|
| X08XXFXXX3 | XDBLS | XDBLM |
| PART NO    | SCREW | NUT   |

|                        |               |
|------------------------|---------------|
| AuGLAR                 | $\pm 5^\circ$ |
| X.                     | $\pm 0.40$    |
| X.x                    | $\pm 0.30$    |
| X.xx                   | $\pm 0.20$    |
| X.xxx                  | $\pm 0.15$    |
| UNSPECIFIED TOLERANCES |               |

XKLB 星城 Connection

|                        |    |                                                                                             |                           |      |          |
|------------------------|----|---------------------------------------------------------------------------------------------|---------------------------|------|----------|
| DESIGN                 | 阿树 | VIEW:  | MODEL TYPE:<br>D-SUB      |      |          |
| CHECKED                |    | UNIT: mm/in                                                                                 | PART NO.:<br>X0809FT7BL3  |      |          |
| APPROVED               |    | SIZE: A4                                                                                    | DWG NO.:<br>X-X0809FT7BL3 |      |          |
| PRECISION CO., LIMITED |    |                                                                                             | SCALE                     | PAGE | REVISION |
|                        |    |                                                                                             | N/A                       | 1/1  | A1       |