

标 记
MARKECN编号/变更内容
ECN NO/DEFINITION修 改
REVISE日 期
DATE核 准
APPROVE

Materials and Electroplating

①. Screw: M2.5, iron, galvanized, straight groove

②. Plastic body: PA66

③. Clip: Copper, nickel plated

④. Square box: copper, nickel plated

⑤. Plastic cover plate: PA66

Electrical performance Rated voltage: 300V

Rated current: 15A

Contact resistance: 20m Ω (Max)

Insulation resistance: 500M Ω/DC500V

Voltage endurance: AC1500V/1min

Wire diameter used: 28-12AWG





mechanical properties

Temperature range: -40 °C~+105 °C

Instantaneous temperature: +250 °C for 5 seconds

Torque: 0.4Nm (3.6 Ib. in)

Stripping length: 7-8mm

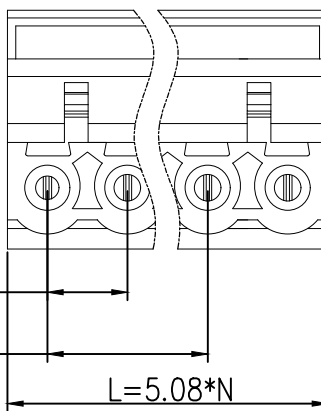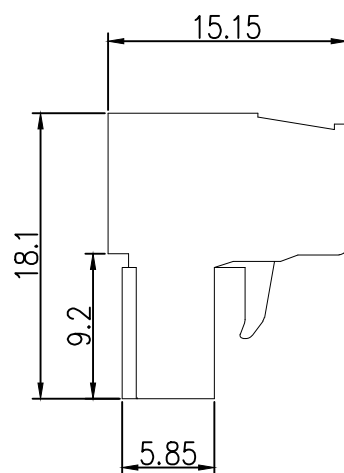

$$P=5.08*(N-1)$$

$$L=5.08*N$$

2	方盒	铜	镀镍	
1	基座	PA66	绿色	
序号	品名	材质	电镀/颜色	备注

	深圳市虹成电子有限公司		品 名		接线端子																			
			料 号		HC-JXDZK-5.08-12P																			
GENERAL TOLERANCES (UNLESS SPECIFIED)			比 列	1 : 1																				
<table border="1"><tr><th colspan="3">公差参数</th></tr><tr><th>Pin#</th><th>DinP</th><th>DimL</th></tr><tr><td>2-6P</td><td>±0.10</td><td>±0.20</td></tr><tr><td>7-12P</td><td>±0.20</td><td>±0.30</td></tr><tr><td>13-18P</td><td>±0.25</td><td>±0.40</td></tr><tr><td>19-24P</td><td>±0.30</td><td>±0.50</td></tr></table>			公差参数			Pin#	DinP	DimL	2-6P	±0.10	±0.20	7-12P	±0.20	±0.30	13-18P	±0.25	±0.40	19-24P	±0.30	±0.50	单 位	MM	制 图	AhYe
			公差参数																					
			Pin#	DinP	DimL																			
			2-6P	±0.10	±0.20																			
7-12P	±0.20	±0.30																						
13-18P	±0.25	±0.40																						
19-24P	±0.30	±0.50																						
			张 数	1 OF 1	审 核	夏操云																		
			版 本	A	批 准	赵亮亮																		
					APPROVE																			