


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.10	阿树



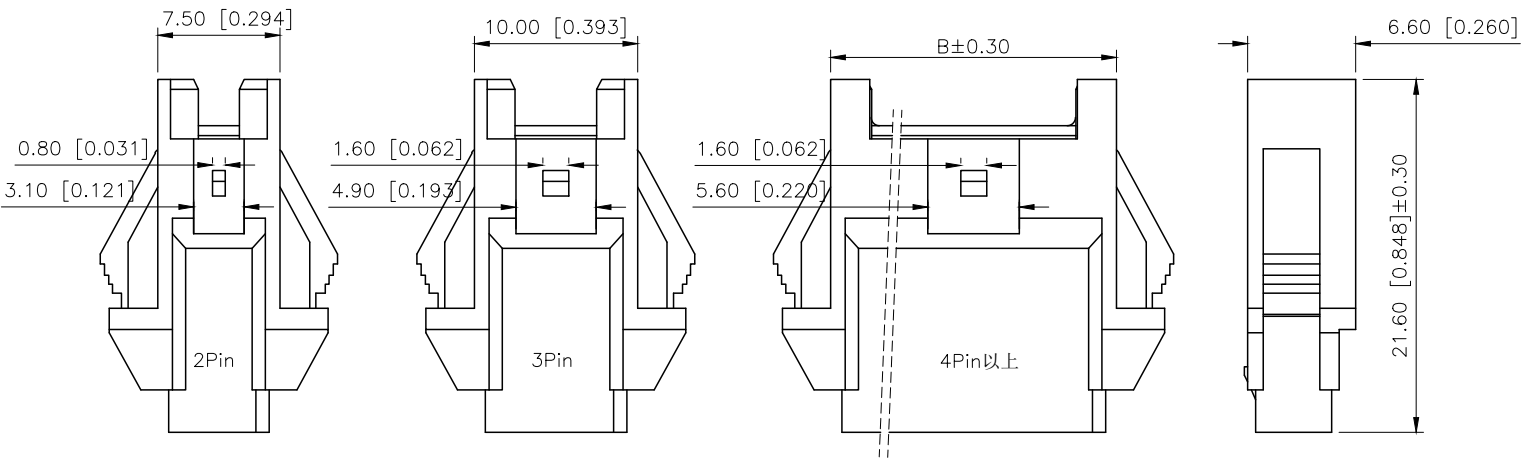


- SPECIFICATIONS
- Voltage rating:250V AC/DC
 - Current rating:3A AC/DC
 - Withstanding Voltage:1000V AC/minute
 - Temperature range: -40°C~+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤20mΩ

PART NO.:

X2508 H F-XX-N0
① ② ③ ④ ⑤

- ①Series No
②Category:H-HSG
③Category:F-Female Housing
④Row No.Pin No:XX-02~20P
⑤Material:N0-PA66 UL94V-0

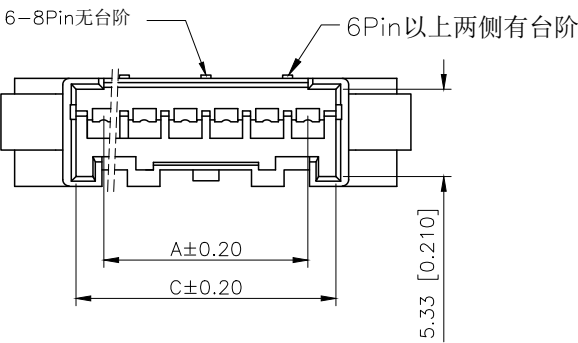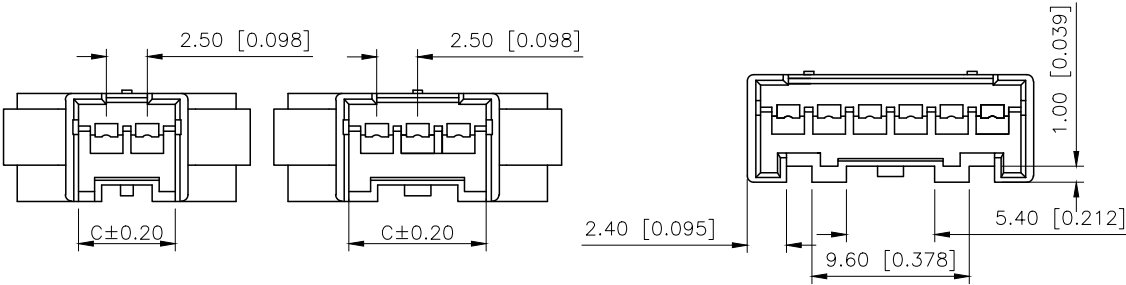

Poles	Dimensions(mm)					Poles	Dimensions(mm)				
	A	B	C	D	E		A	B	C	D	E
02	2.50	7.50	5.90	7.90	11.20	10	22.50	27.50	25.90	27.90	31.20
03	5.00	10.00	8.40	10.40	13.70	11	25.00	30.00	28.40	30.40	33.70
04	7.50	12.50	10.90	12.90	16.20	12	27.50	32.50	30.90	32.90	36.20
05	10.00	15.00	13.40	15.40	18.70	13	30.00	35.00	33.40	35.40	38.70
06	12.50	17.50	15.90	17.90	21.20	14	32.50	37.50	35.90	37.90	41.20
07	15.00	20.00	18.40	20.40	23.70	15	35.00	40.00	38.40	40.40	43.70
08	17.50	22.50	20.90	22.90	26.20	-	-	-	-	-	-
09	20.00	25.00	23.40	25.40	28.70	20	47.50	52.50	50.90	52.90	56.20
X2508HF-XX-N0			Nylon 66		X2508H			X2508TM			
PART NO			Material		Suitable XKB Housing			Suitable XKB Terminal			

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 2.50mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X2508HF-XX-N0
APPROVED		SIZE: A4	DWG NO.: