

Actuator

52-
273.0252

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/52-273.0252>

Your product:



52-273.0252

Actuator

MOUNTING

Mounting type: Panel mounting

OPERATING-/INDICATION PART

Lever material: plastic

Lever shape: short

ELECTRICAL CHARACTERISTICS

Thermal current I_{th}: 5 A, according to EN / IEC 60947-5-1
The maximum current in continuous operation and at ambient temperature not exceeding the quoted maximum values.

Switching rating: 250 V @ 5 A

Contacts: 3 NC / 3 NO

Rated Operational Voltage U_e: 250 VAC/DC according to EN IEC 60947-1

Electric strength: 2500 VAC, 50 Hz, 1 min. between all terminals and earth, according to IEC 61058-1, part 15

Switching voltage and switching current:

- 250 VAC, 5 A (ohmic)
- 250 VAC, 3 A (Soldering terminal)
- 250 VAC, 2 A (inductive, cos(phi) = 0.7)
- 125 VAC, 3 A (inductive, cos(phi) = 0.7)
- 220 VDC, 0.1 A (inductive, L:R = 30 ms)
- 110 VDC, 0.2 A (inductive, L:R = 30 ms)
- 60 VDC, 0.7 A (inductive, L:R = 30 ms)
- 24 VDC, 2 A (inductive, L:R = 30 ms)

Standards: According to EN/IEC 61058-1

Electrical lifetime: 50 000 cycles of operation

Protection class: II

MECHANICAL CHARACTERISTIC

Switching positions:	2 positions
Switching action:	Rest - Maintained
Contact material:	Gold
Terminal:	Soldering terminal
Operating force:	1,8 ... 6 N, depending on the number of switching elements
Switching system:	Snap-action switching element
Switching angle:	90° right
Weight:	0.006 kg
Switching system:	Self-cleaning, double-break snap action switching system, 1 normally closed and 1 normally open contact per element.
Mechanical lifetime:	1 Mio. cycles of operation
Wire cross section:	Snap-action switching element with tinned soldering terminals at the sides Max. wire diameter 2 wires à 1.2 mm Max. wire cross-section of stranded cable 1 x 1 mm ²
Tightening torque:	Fixing nut max. 0.5 Nm

AMBIENT CONDITION

Vibration resistance:	10 g at 10 Hz...1500 Hz, amplitude 0.75 mm (Sinusoidal), according to DIN EN 60512-4-4, DIN EN 60068-2-6
Storage temperature:	– 40 °C ... + 85 °C
Climate resistance:	Standard condition, as per DIN EN 60068-2-30 Changing condition, as per DIN EN 60068-2-14
IP front protection:	IP65, according to DIN EN 60529
Operating temperature:	– 25 °C ... + 55 °C
Shock resistance:	15 g for 11 ms, as per DIN / EN 60512-4-3, DIN / EN 60068-2-27 (Single impacts, semi-sinusoidal)

CERTIFICATE

REACH:	REACH compliant
RoHS:	RoHS compliant
Approbations:	CB (IEC 61058-1), CQC, CSA, DNV, ENEC (EN 61058-1), UL
Conformities:	CE, UKCA, 2011 / 65 / EC (RoHS), 2014 / 30 / EU (EMC), 2014 / 35 / EU (LVD)

OTHER

Short Description:	Actuator, optional illuminative, short, 3 NC / 3 NO, Rest - Maintained, Soldering terminal, IP65, according to DIN EN 60529
---------------------------	---


Hints:

Illuminative


Housing colour:

Black

Dimension drawings:



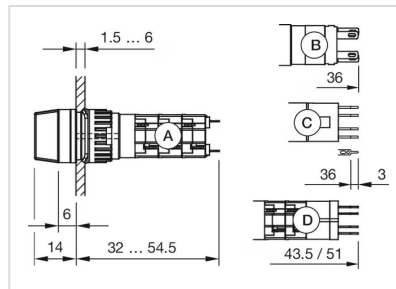


A = Solder terminal
B = Plug-in terminal 2.8 mm x 0.5 mm
C = Universal terminal 2.0 mm x 0.5 mm
D = Universal-Solder terminal

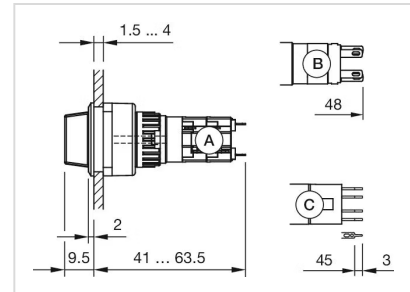


A = Solder terminal
B = Solder terminal 2.8 mm x 0.5 mm
C = Universal terminal 2.0 mm x 0.5 mm

Mounting cut-outs:

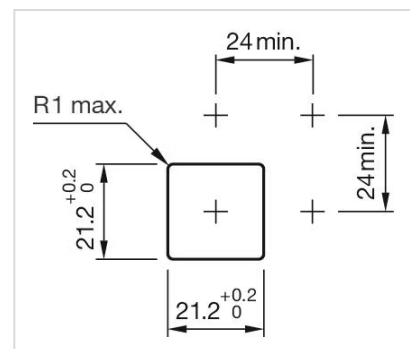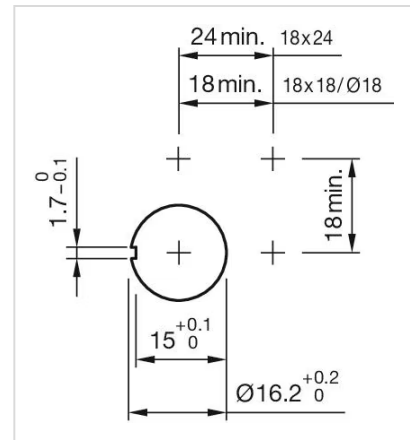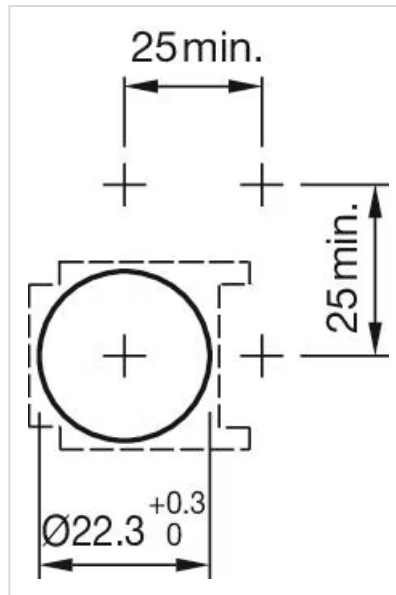

Switching positions:

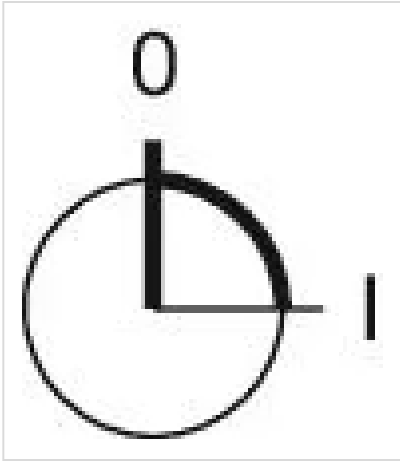

Wiring diagrams:

