
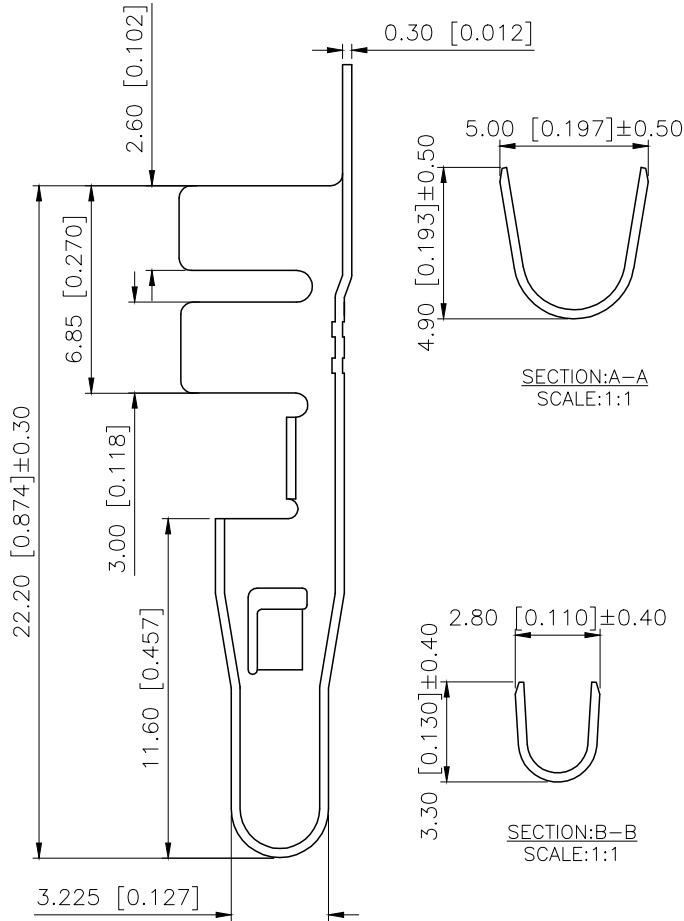


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.1.2	阿树

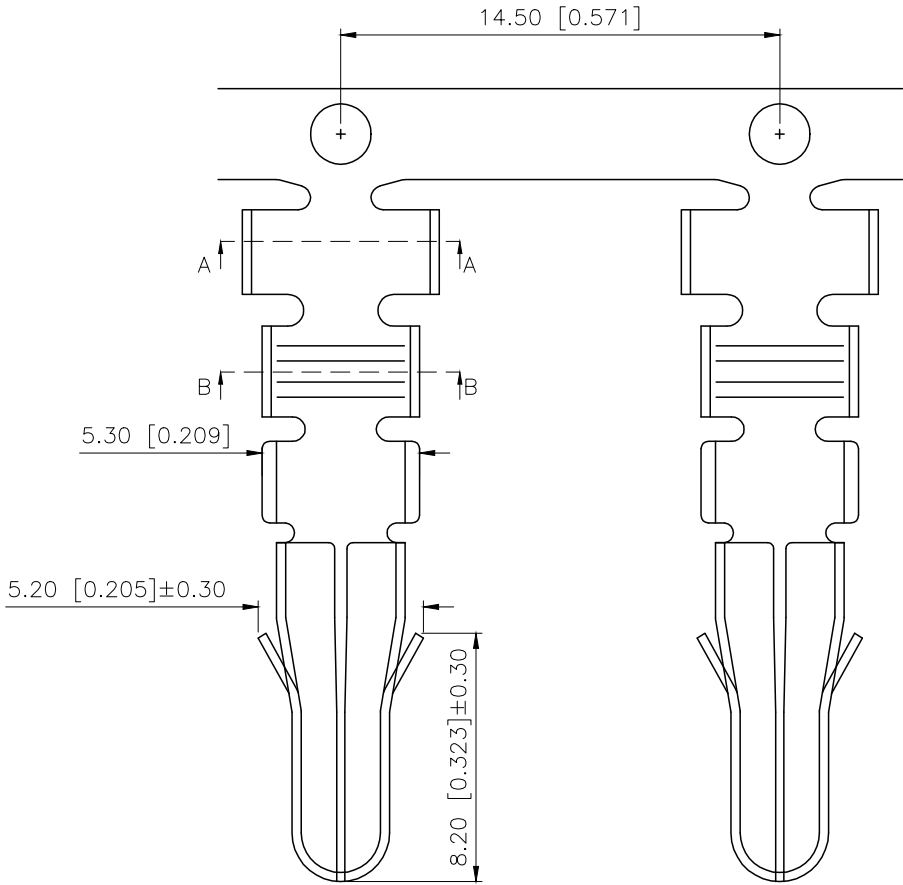

Specifications:
规格:
Voltage rating:600V AC/DC
额定电压: 600V AC/DC
Current rating:20A AC/DC
额定电流: 20A AC/DC
Withstanding voltage:1500V AC/minute
耐受电压: 1500V AC/分钟
Temperature range:-40℃--+125℃
温度范围: -40℃--+125℃
Insulation resistance:1000MΩ min
绝缘电阻: 1000MΩ Min
Contact resistance:20mΩ Max
接触电阻: 20mΩ Max

PART NO.:
K 838100 I M-B SN
① ② ③ ④ ⑤ ⑥
①K:XKBTEK-Car Connector
②XKB Series No
③Category:T-Terminal
④Special No:M-Male Terminal
⑤Material:B-Brass
⑥Plating:SN-Plated Tin

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	8.38mm Automobile connector
CHECKED		UNIT:	mm/in	PART NO.:	K838100TM-BSN
APPROVED		SIZE:	A4	DWG NO.:	X-K838100TM-BSN

K838100TM-BSN	Brass	AWG#22~16	K838100HM
PART NO	Material	Wire Range	Suitable XKB Housing

SCALE	PAGE	REVISION
N/A	1/1	A1