

1


2

3

4

REVISIONS

REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.30	阿树

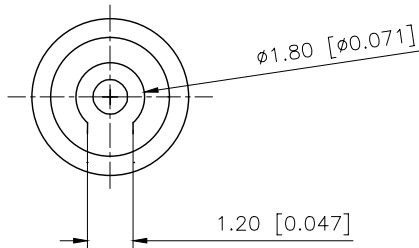

technical standard:

技术标准:

1.Appearance: the surface of all parts shall be clean without rust, burr, crack or other mechanical damage

1. 外观: 各部件表面应清洁,不得有锈蚀、毛刺、裂纹或其他机械损伤.

2.Insulation endurance: each conductor shall be able to withstand Ac500V for 1 minute without current breakdown and arcing

2.绝缘耐力: 各导体间应能受AC500V,1分钟的作用,而无电流击穿和飞弧现象

3.Insulation resistance: above DC 500 V, 100m Ω


3. 绝缘电阻:在 DC 500 V,100MΩ以上

4.Contact resistance value: the maximum contact resistance between conductors is 30m Ω

4.接触电阻值: 各导体间的接触电阻最大为30mΩ.

5.5% salt spray for 24h without erythema, oxidation and other defects on the surface

5.浓度5%盐雾24H表面而无红斑及氧化等不良.

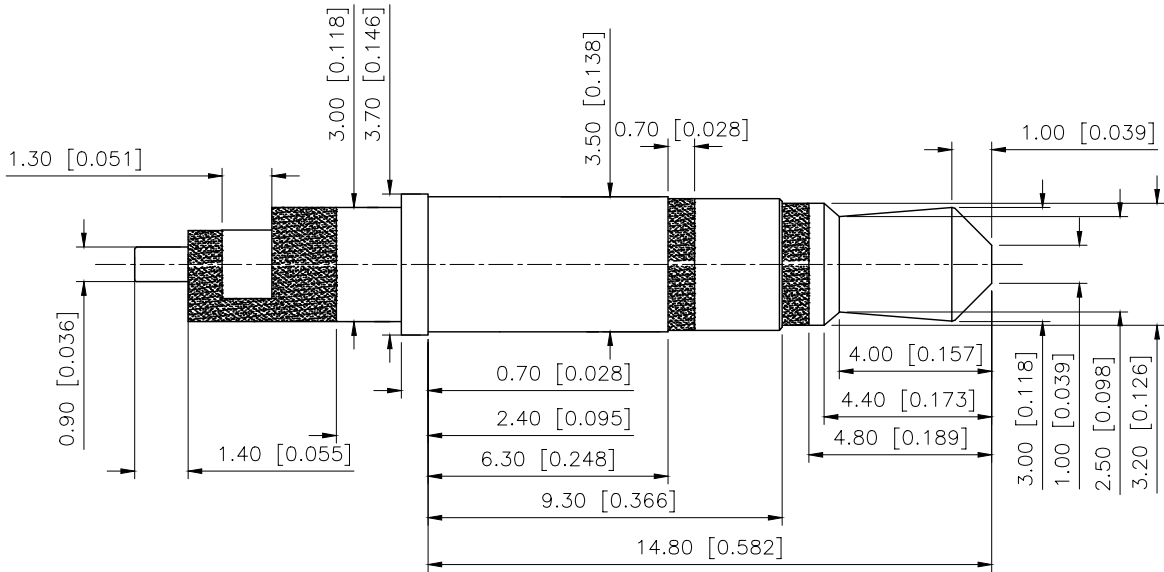

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: PHONE JACK
CHECKED		UNIT: mm/in	PART NO.: PT-35373J148B
APPROVED		SIZE: A4	DWG NO.: X-PT-35373J148B

1

2

3

4