

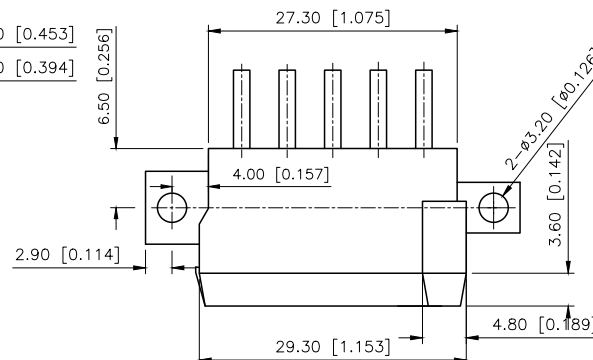
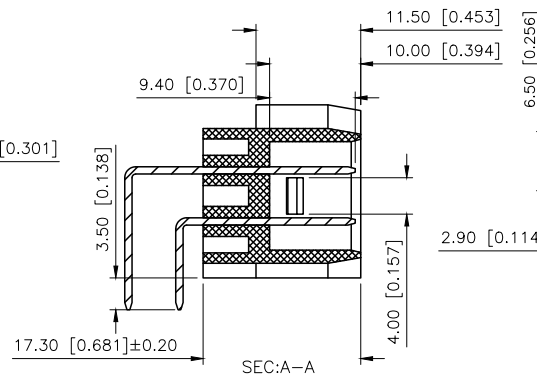
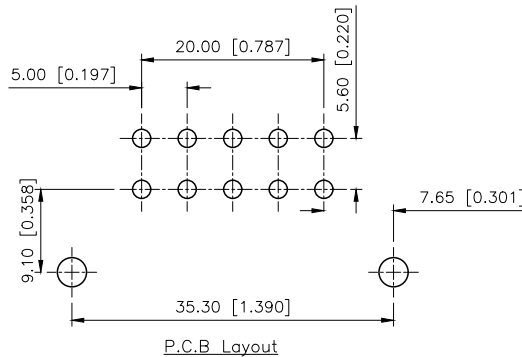
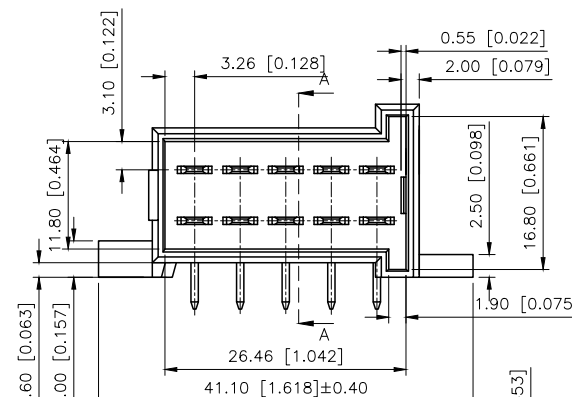


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.12.24	阿树

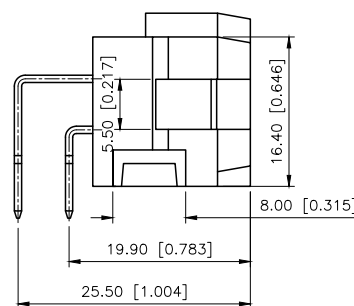



Current rating:25A AC/DC
额定电流: 25A AC/DC
Temperature range:-40℃--+125℃
温度范围: -40℃--+125℃

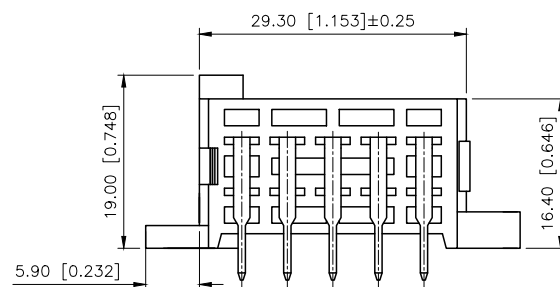

PART NO.:

K 828801 W R-2x05-PT SN
① ② ③ ④ ⑤ ⑥ ⑦

- ①K:XKBTEK-Car Connector
- ②XKB Series No
- ③Category:W-Wafer
- ④Welding Board Rangle:R-Stright 90°
- ⑤Row No.Pin No:2x05 Pin
- ⑥Material:PT-PBT+GF15+V0
- ⑦Palting:SN-Plated Tin

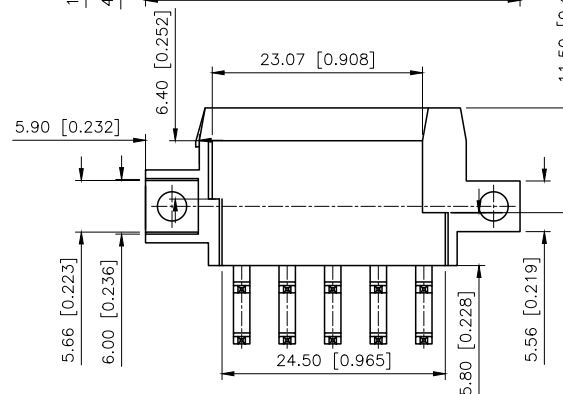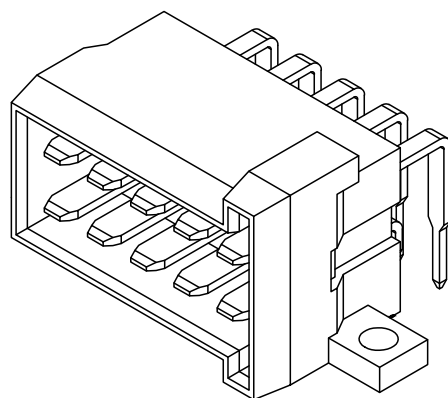

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	①	MODEL TYPE:	5.00mm Automobile connector
CHECKED		UNIT:	mm/in	PART NO.:	K828801WR-2x05-PTS
APPROVED		SIZE:	A4	DWG NO.:	