

Pitch:1.27x1.27mm(0.05 " x0.05 ")
Box Header Of Various Heights Series Dip Type

ELETE
—Professional Connecting Solution—
BXIDS11 Series


Specifications

Current Rating:1.0 Ampere
Insulation Resistance:1000MΩ Min
Dielectric Withstanding:300V AC
Contact Resistance:20mΩ Max
Operating Temperature:-40℃ to +105℃





Materials

Contact Material: Brass
Insulation Material: Polyester,UL 94V-0
LCP/NL6T


All material RoHS&Reach Compliant
Halogen-free is available

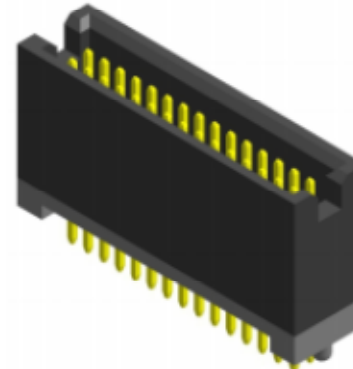

Mating with

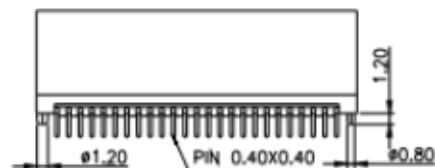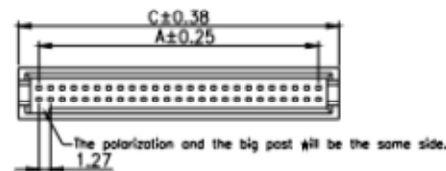

Recommended
P.C.Board
Hole Layout



No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	C	D		A	C	D		A	C	D		A	C	D
05	5.08	9.55	8.23	14	16.51	20.98	19.68	23	27.94	32.41	31.09	32	39.37	43.84	42.52
06	6.35	10.82	9.50	15	17.78	22.25	20.93	24	29.21	33.68	32.36	33	40.64	45.11	43.79
07	7.62	12.09	10.77	16	19.05	23.52	22.18	25	30.48	34.95	33.63	34	41.91	46.38	45.06
08	8.89	13.36	12.04	17	20.32	24.79	23.43	26	31.75	36.22	34.90	35	43.18	47.65	46.33
09	10.16	14.63	13.31	18	21.59	26.06	24.68	27	33.02	37.49	36.17	36	44.45	48.92	47.60
10	11.43	15.90	14.58	19	22.86	27.33	25.93	28	34.29	38.76	37.44	37	45.72	50.19	48.87
11	12.70	17.17	15.85	20	24.13	28.60	27.18	29	35.56	40.03	38.71	38	46.99	51.46	50.14
12	13.97	18.44	17.12	21	25.40	29.87	28.43	30	36.83	41.30	39.98	39	48.26	52.73	51.41
13	15.24	19.71	18.39	22	26.67	31.14	29.68	31	38.10	42.57	41.25	40	49.53	54.00	52.68