

Materials and Electroplating





- ①. Screw: M2.5, iron, galvanized, straight groove
- ②. Plastic body: PA66
- ③. Clip: Copper, nickel plated
- ④. Square box: copper, nickel plated
- ⑤. Plastic cover plate: PA66

Rated voltage: 300V
Rated current: 15A
Contact resistance: 20m Ω (Max)
Insulation resistance: 500M Ω/DC500V
Voltage endurance: AC1500V/1Min
Wire diameter used: 28-12AWG

mechanical properties

Temperature range: -40 ℃~+105 ℃
Instantaneous temperature: +250 ℃ for 5 seconds

Torque: 0.4Nm (3.6 Ib. in)
Stripping length: 7-8mm

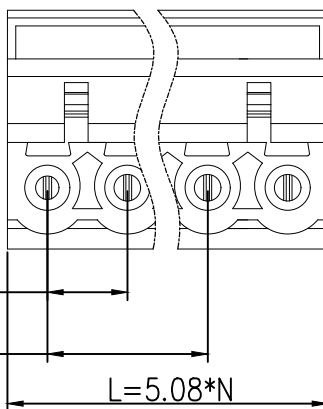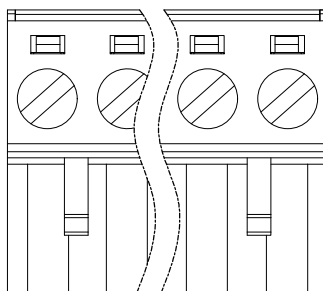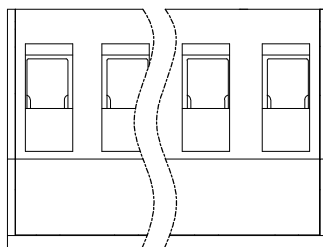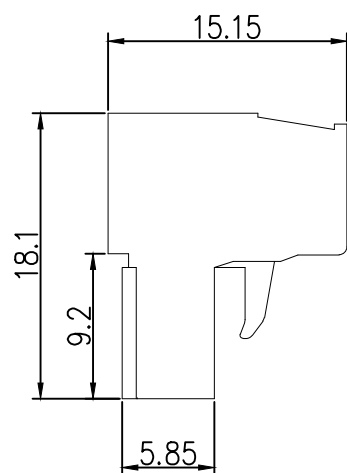

$$P = 5.08 \cdot (N - 1)$$

$$L = 5.08 \cdot N$$

2	方盒	铜	镀镍	
1	基座	PA66	绿色	
序 号	品 名	材 质	电镀/颜色	备 注

	深圳市虹成电子有限公司		品 名		接线端子																			
			料 号		HC-JXDZK-5.08-13P																			
GENERAL TOLERANCES (UNLESS SPECIFIED)			比 例	1 : 1																				
<table border="1"><thead><tr><th colspan="3">公差参数</th></tr><tr><th>尺寸</th><th>DimA</th><th>DimB</th></tr></thead><tbody><tr><td>2-4P</td><td>±0.1</td><td>±0.20</td></tr><tr><td>7-12P</td><td>±0.20</td><td>±0.30</td></tr><tr><td>13-18P</td><td>±0.25</td><td>±0.40</td></tr><tr><td>19-24P</td><td>±0.30</td><td>±0.50</td></tr></tbody></table>			公差参数			尺寸	DimA	DimB	2-4P	±0.1	±0.20	7-12P	±0.20	±0.30	13-18P	±0.25	±0.40	19-24P	±0.30	±0.50	单 位	MM	制 图	AhYe
公差参数																								
尺寸	DimA	DimB																						
2-4P	±0.1	±0.20																						
7-12P	±0.20	±0.30																						
13-18P	±0.25	±0.40																						
19-24P	±0.30	±0.50																						
X. xxx ±0.15 X. xx ±0.25 X. x ±0.35			张 数	1 OF 1	审 核	夏操云																		
			PART NO		CHECKED																			
			版 本	A	批 准	赵亮亮																		
			REV		APPROVE																			