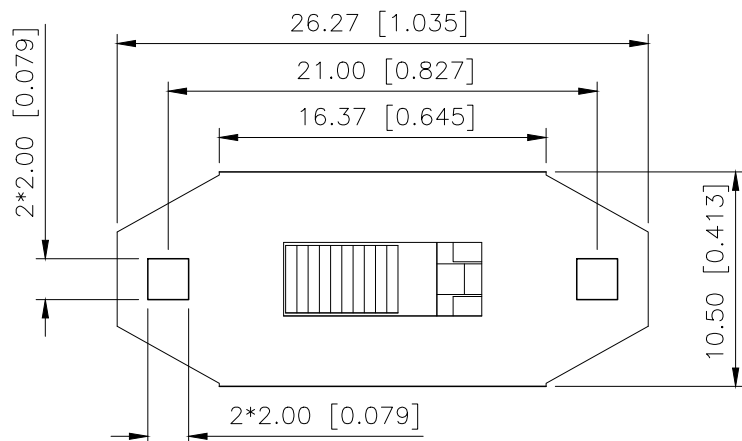


规格 Specification:

1.额定值 Rating:3A 125/250VAC

2.接触电阻 Contact resistance:≤30 mΩ

3.绝缘电阻 Insulation resistance: $\geq 100 \text{ M}\Omega$
4.电气寿命 Electronics life: > 10000 cycles

5.操作力 Operation force:500±150gf

6.所有材料符合Rohs要求 All materials are Rohs compliant

PART NO.:

$$\frac{\text{SS-X}}{\textcircled{1}} \quad \frac{\text{03}}{\textcircled{2}} \quad \frac{\text{22}}{\textcircled{3}} \quad \frac{\text{S}}{\textcircled{4}} \quad \frac{\text{G-6}}{\textcircled{5}} \quad \frac{\text{R}}{\textcircled{6}} \quad \frac{\text{4}}{\textcircled{7}} \quad \frac{\text{B}}{\textcircled{8}} \quad \frac{\text{B}}{\textcircled{9}} \quad \frac{\text{B}}{\textcircled{10}} \quad \frac{\text{B}}{\textcircled{11}}$$

① SS: XKB Vertical handle;

② Enclosure Material:
A—Metal case;
BLANK—Plastic case;

③ Current Rating: 0.3–3A;

④ Switch Circuit:22-2P2T;

⑤ S: Wire bonding;

⑥ Handle Shape: G-Camber handle;



⑦ Handle Height: 3~15mm;

⑧ Enclosure Shape: R—Locking rings enclosure;

⑨ Terminal specs:
1:TYPE-1; 2:TYPE-2; 3:TYPE-3;
4:TYPE-4; 5:TYPE-5;


⑩ Handle Colour:
B-Black; W-White; R-Red

⑪ Housing Colour:
B-Black; W-White; R-Red

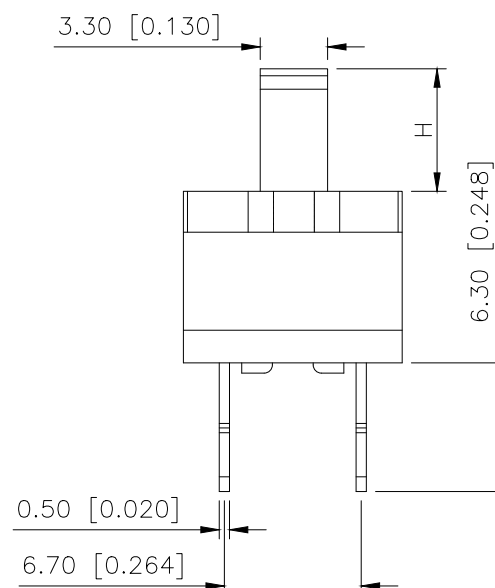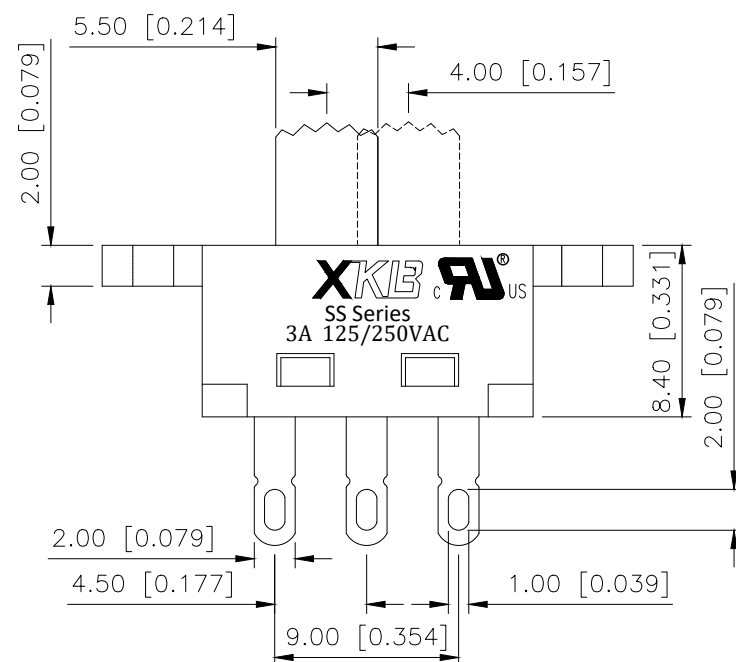

产品字码标识

ANGLAR	$\pm 5^{\circ}$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	

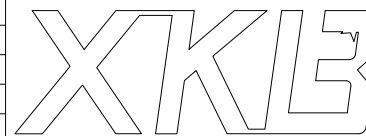

DESIGN	桑 菴	VIEW: 	MODEL TYPE: SLIDE SWITCH		
CHECKED		UNIT: mm/in	PART NO.: SS-0322SG-6R4BB		
APPROVED		SIZE: A4	DWG NO.: X-SS-0322SG-6R4BB		
PRECISION CO.,LIMITED			SCALE N/A	PAGE 1/1	REVISION A0