

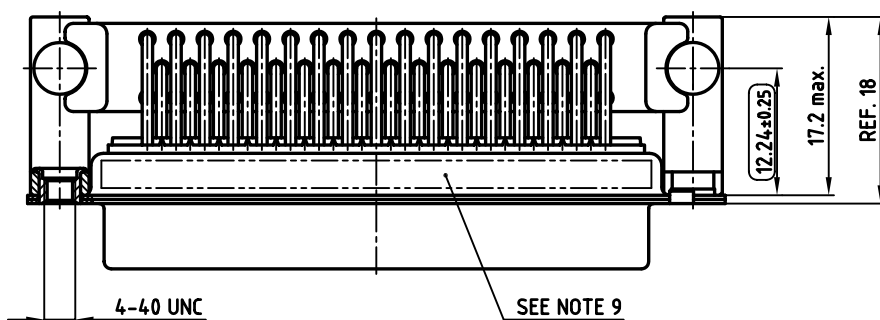
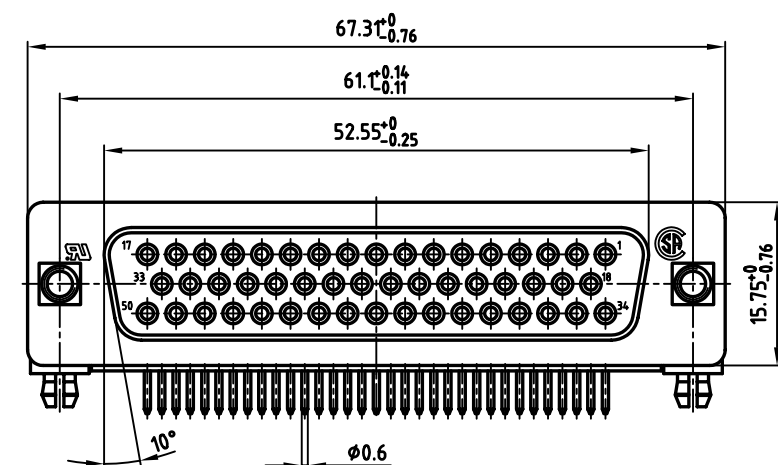


used for: D-SUB

NOTES:

1. METALSHELLS: STEEL; min. 320μ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
PLATING: 8μ" HARD GOLD OVER min. 50μ" NICKEL
4. METAL BRACKET: STEEL; min. 320μ" TIN over 80μ" NICKEL
5. THREADED INSERT: COPPER ALLOY; min. 200μ" TIN over 80μ" NICKEL
6. PCB-SNAP: COPPER ALLOY; min. 200μ" TIN over 80μ" NICKEL
PCB-HOLE: $\phi 3.1 \pm 0.1$; PCB THICKNESS 1.6mm
7. P.C.B. HOLE DRILLINGS ON SHEET 2
8. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
9. CONNECTOR IS PART MARKED: 164A18759X CONEC ABC
10.  = CHECK DIMENSION

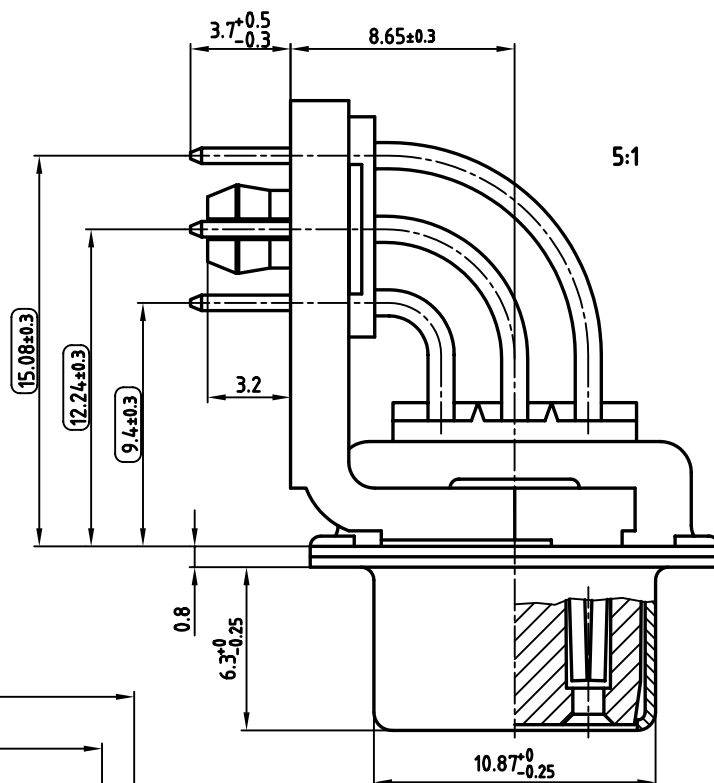

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance		dim. in mm
2004	date	name
drawn	19.04.	Schmidt
appd.	19.04.	Mickenbecker
norm	DIN 41652	
d-old		
CONEC		

scale:	2:1 (5:1)	
material:	SEE NOTES	
title:	D-SUB FEMALE 90° 50pos. 0.370inch threaded insert, metal bracket and clip	
dwg no:	AutoCAD 2004	DIN-A
	16K1A1144	3
part no:	164A18759X	
		sh:1/2

