

- ▶ Heatsinks f.cool
- ▶ Cases f.case
- ▼ **Connectors f.con**
 - ▶ Sockets
 - ▼ PCB connectors
 - Male headers
 - Female headers
 - Direct female connectors
 - **Jumpers**
 - ▶ IDC-connectors
 - ▶ D-Sub connectors
 - Brackets for PC
 - ▶ Optoelectronics


Jumpers

CAB 4 ...

CAB 4 G R

for 0.6...0.64 mm wire wrap pins and Ø 0.6...0.7 mm The flexible contacts are shorting two pins. The jumpers can be mounted behind and next to each other.

add to request

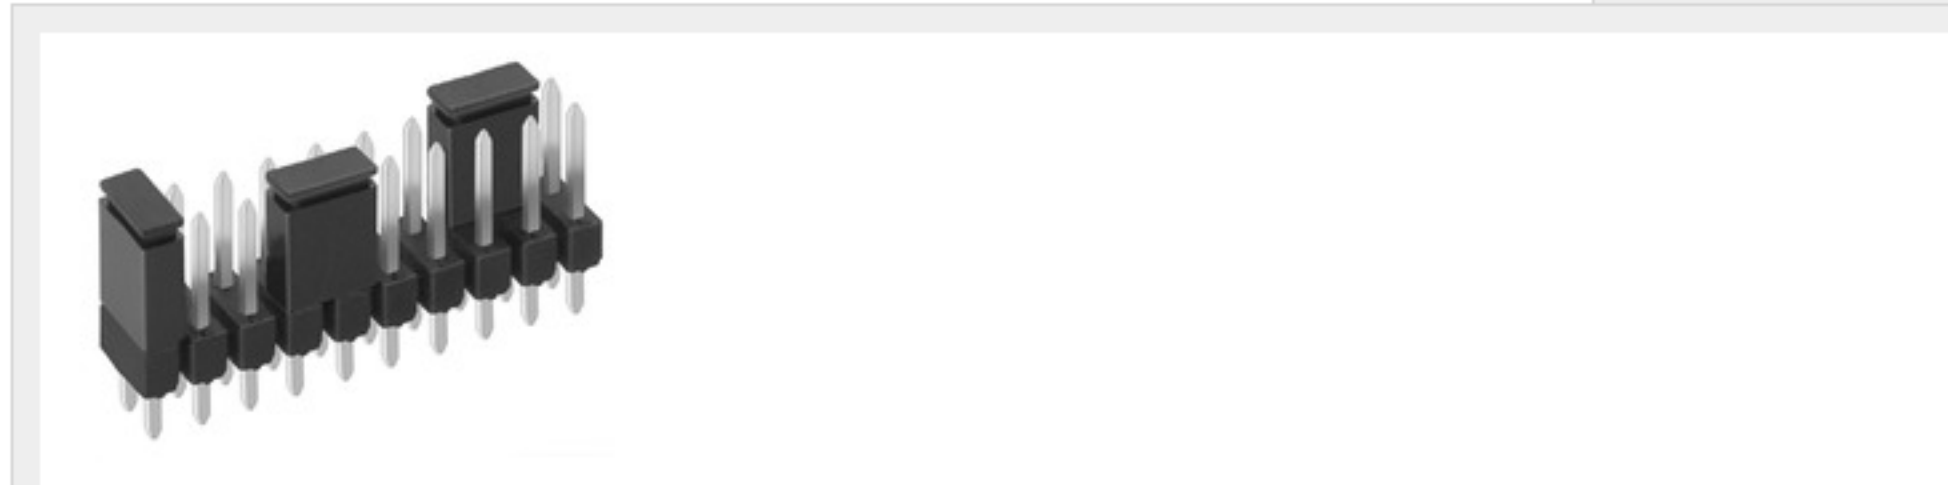

Features Technical Drawing Service

no. of contacts	2
surface contact / contact sleeve	0.1 µm Au 5 µm Sn
surface of contact	0.1 µm gold
insert depth	4...6.1mm
nominal current	1.5 A
nominal voltage	250 V AC
insulating body material	PBT
temperature range	-40°C... +105°C
grid	2.54 mm
version	closed
colour	red
reflow solderable	no