

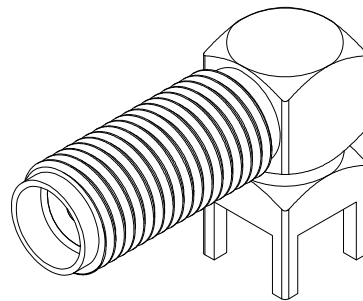
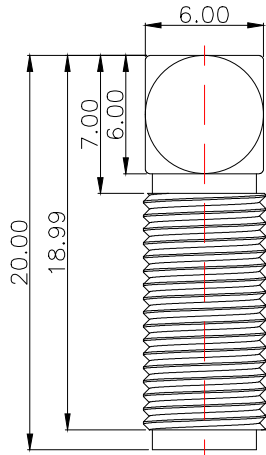
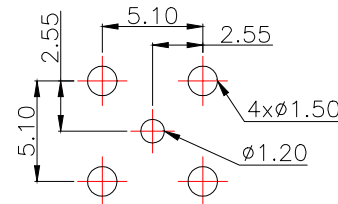
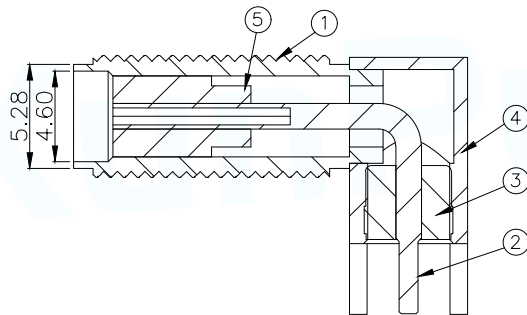


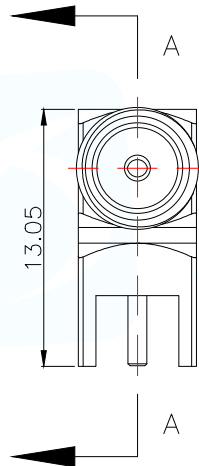


Technical requirements	
Characteristic impedance	50 Ω
Frequency range	0-6GHZ
Contact resistance	
Inner conductor	$\leq 3m\Omega$
Outer conductor	$\leq 2m\Omega$
Insulated resistance	$> 5000M\Omega$
Salt spray time	48H
Separation force	$> 0.28N$
Appearance: no shift point burr scratch surface bright, no dirt, no deformation, etc	

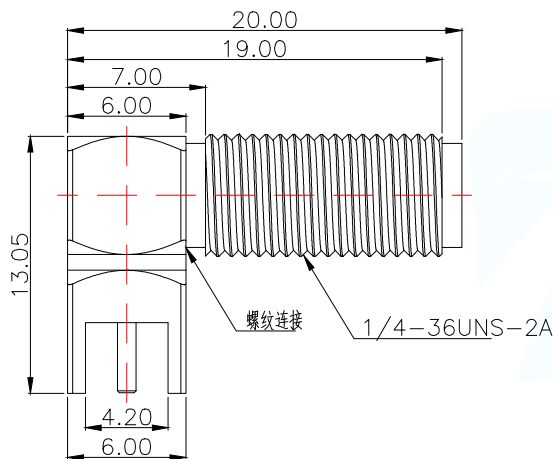

PCB.WELDING DRAWING (TOLERANCE:±0.05)

A-A

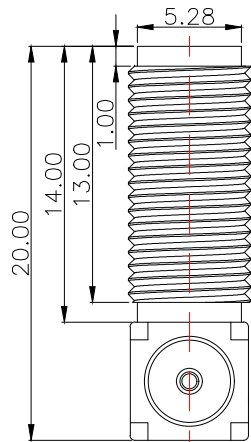

1	全螺铜套	1	黄铜	镀金
2	母针	1	黄铜	镀金
3	绝缘体1	1	PTFE	
4	铜座	1	黄铜	镀金
5	绝缘体2	1	PTFE	
序号	名称	数量	材料	备注

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: 弯头—全螺内孔—H13*20—LW		
DECIMALS:		PAR		
X.X±0.30		DWN		
X.XX±0.25		CHKD		
X.XXX±0.15		APVD		
ANGLES:		SCALE N:A		
X.*±5°		UNIT:MM		
X.X'±1°		SIZE:A4		
		SHEET:1F1		
		REV:A		