

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0151320400

Status:


Active

Overview:

Pico-Lock Connector System

Description:

Pico-Lock-to-Pico-Lock Off-the-Shelf (OTS) Cable Assembly, 1.50mm Pitch, Single Row, 50.00mm Length, 4 Circuits, Black

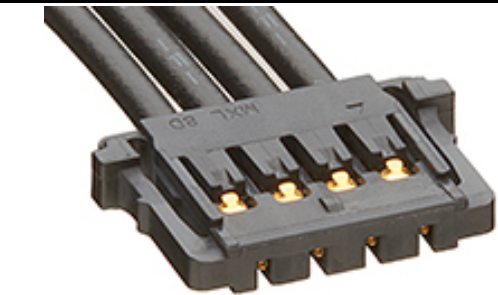

Series image - Reference only

Documents:

- [3D Model](#)
- [Drawing \(PDF\)](#)
- [3D Model \(PDF\)](#)
- [Datasheet \(PDF\)](#)
- [RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family

Series

Application

Assembly Configuration

Connector to Connector

Overmolded

Overview

Product Name

Type

UPC

Cable Assemblies

15132

Signal, Wire-to-Board

Dual Ended Connectors

Pico-Lock-to-Pico-Lock

No

Pico-Lock Connector System

Pico-Lock

Discrete Wire Assembly

191128284912

Physical

Cable Length

Circuits (Loaded)

Color - Resin

Gender

Lock to Mating Part

Material - Metal

Material - Plating Mating

Material - Plating Termination

Material - Resin

Net Weight

Number of Rows

Packaging Type

Pitch - Mating Interface

Single Ended

Termination Interface: Style

Wire Insulation Diameter

Wire Size AWG

Wire/Cable Type

50.00mm

4

Black

Female-Female

Yes

Copper Alloy

Gold

Tin

High Temperature Thermoplastic

0.981/g

1

Bag

1.50mm

No

Crimp or Compression

1.10mm

24

UL 1061

Electrical

Current - Maximum per Contact

Voltage - Maximum

3.0A

150V

Material Info

Reference - Drawing Numbers

Sales Drawing

151320400-000

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2020)9139-DC (19
Jan 2021)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

Search Parts in this Series

15132 Series

Mates With

Pico-Lock Header [504050](#)

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION