
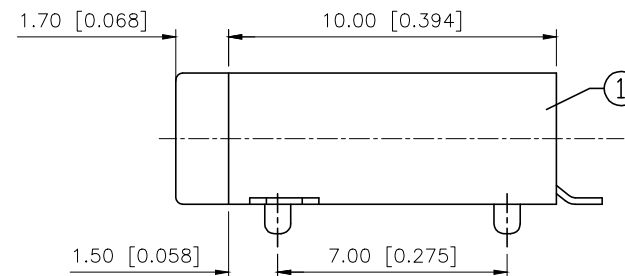




REVIEWS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.25	阿树

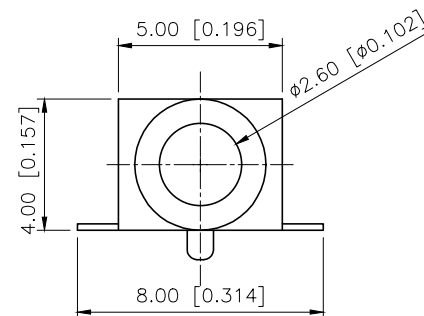


SPECIFICATION

规范

- 1.Rating:DC 12V 1.0A
额定负载: DC 12V 1.0A
- 2.Contact resistance:≤30Ω
接触电阻: ≤30Ω
- 3.Insulation resistance:>100MΩ DC 500V
绝缘电阻: >100MΩ DC 500V
- 4.Withstand voltage: AC 500V/min
耐压: AC 500V/min
- 5.Insertion and extraction force:5-8N
插拔力: 5-8N
- 6.Life test:10,000 cycles
寿命: 10, 000 cycles

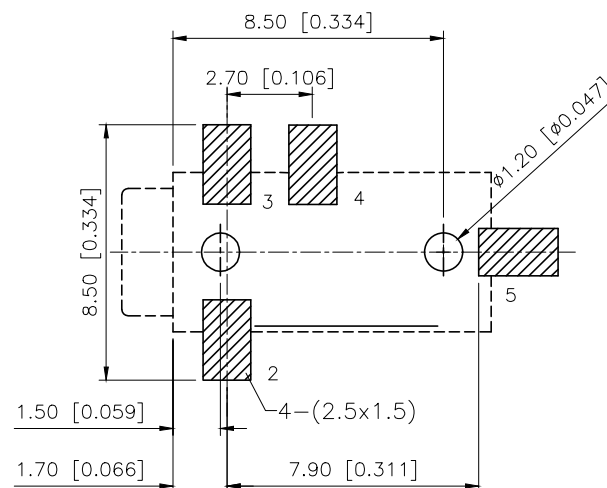

T:1.6 Dimensions of PC board holes
Tolerance :±0.1(Printed-sided view)

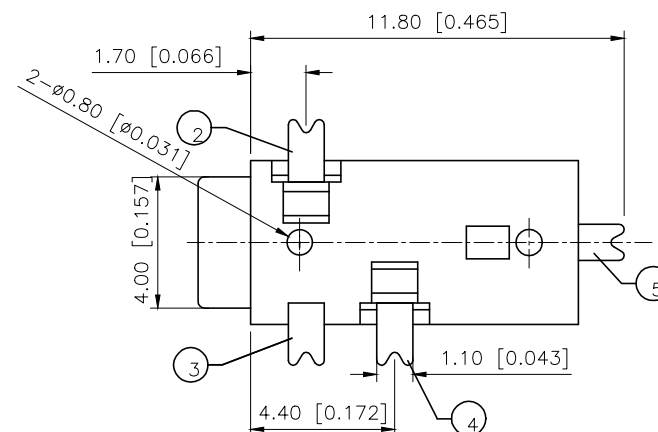

MODEL NO.	PJ-2182-SMT	PJ-2181-SMT	PJ-2180-SMT
SCHEMATIC			

SCHEMATIC

序号	MATERIAL		PLATING
5	terminal 5	Phosphor Bronze	silvering
4	terminal 4	Phosphor Bronze	silvering
3	terminal 3	Phosphor Bronze	silvering
2	terminal 2	Phosphor Bronze	silvering
1	塑料座	PBT	Black

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	2.5 PHONE JACK
CHECKED		UNIT:	mm/in	PART NO.:	PJ-2181-SMT
APPROVED		SIZE:	A4	DWG NO.:	

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1