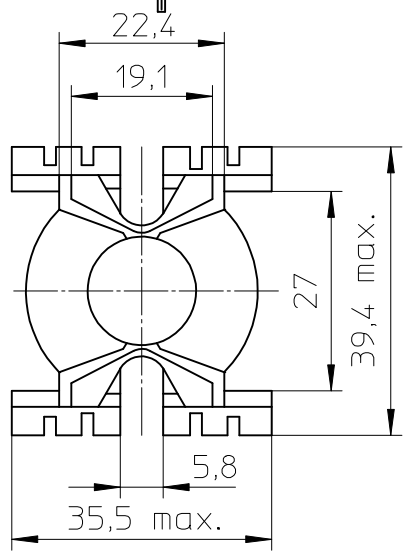

PROPOSED HOLE PATTERN:

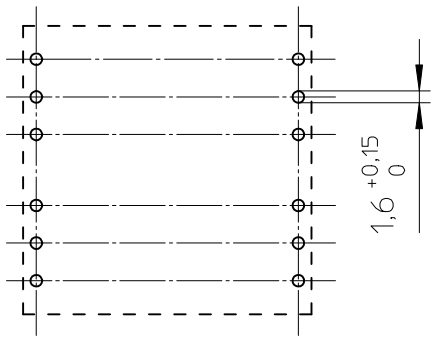

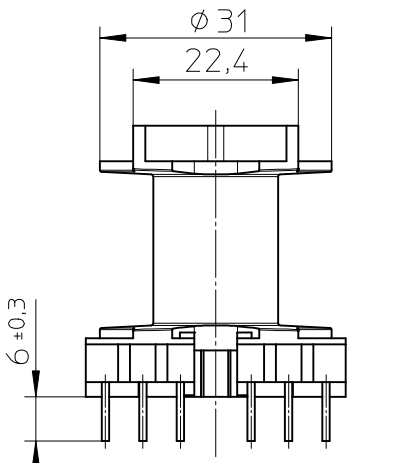

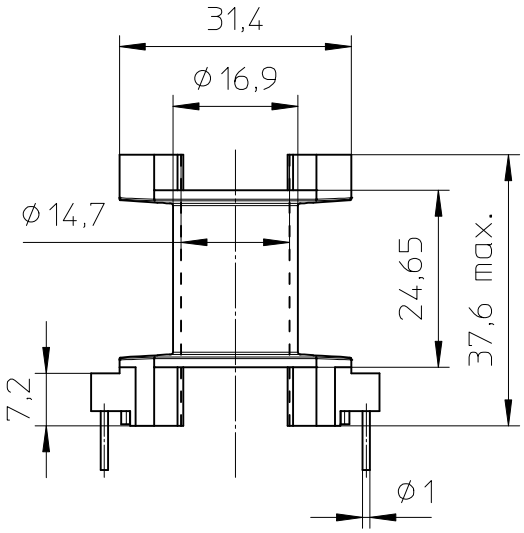

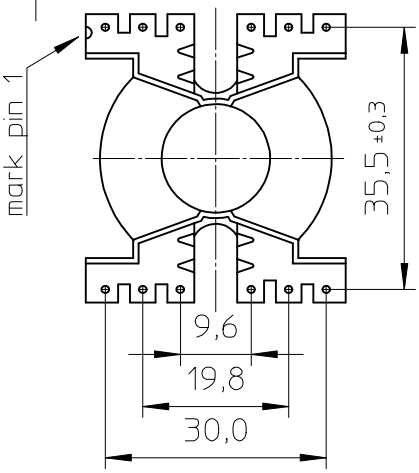

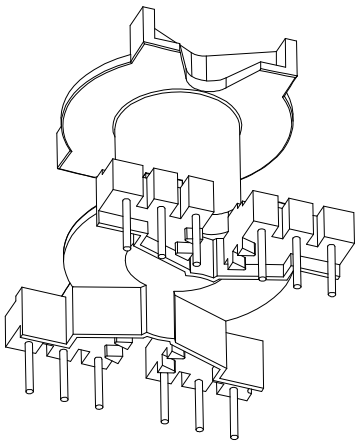

Coil former material:	Rynite FR530 (PET), glass-reinforced. UL file number: E41938 - UL94V-0.
Pin material:	Copper-plated steel wire, Sn plated.
Max. operating temp.:	acc. to IEC 60 085 class H, 180°C.
Resistance to soldering heat:	acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s
Solderability:	acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s
Min. winding area:	152 mm^2
Mean length of turn:	75 mm.

CLASS.NO.			
	CPV-PQ35/35-1S-12P-Z	4322 021 06441	04-07-2004 ~~12-03-2007~~

NAME NAAM A.Wojtasz	SUPERS. VERV.	1 SH BL. SH BL. 112 – 001	010		A4
MPA	CHECK CONTR.	DAT. 04-07-2004	Property of Eigendom van	© FERROXCUBE 2000		

Downloaded from Arrow.com.