
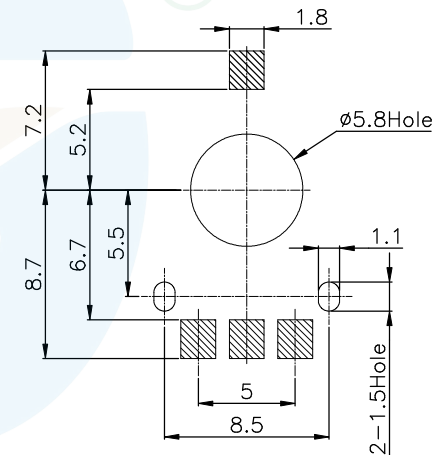
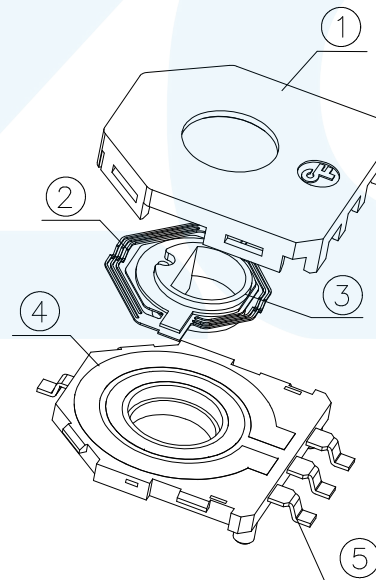


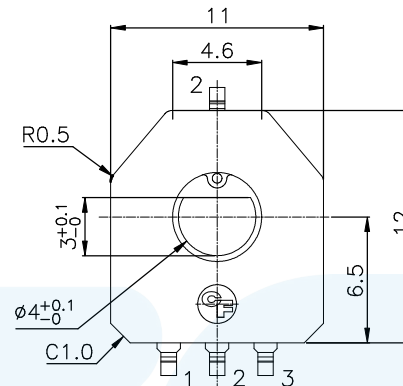
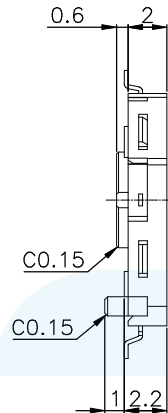


RoHS
Compliant

ZONE	EC N. NO.	DESCRIPTION	DRAWING	DATE
A		INITIAL	林生财	2020.02.18

- 一、ELECTRICAL CHARACTERISTICS 電氣特性
Total Resistance 全阻值: $10K \pm 20\%$
Resistance Taper 阻型: B
Angle of Effective Rotation 碳膜有效角度: $333^\circ \pm 2^\circ$
Sliding Noise 雜音: DC10V $\leq 100\text{mV}$
二、MECHANICAL CHARACTERISTICS 機械特性
Total Rotation Angle 全回轉角度: 360°
Rotational Torque 旋轉力矩: $5-30 \text{ gf.cm}$
Terminal Strength 端子強度: $\geq 0.6\text{Kgf.cm}$
Push-Pull Strength of Shaft 推拔強度: $\geq 1\text{Kgf.cm}$
三、ENDURANCE CHARACTERISTICS 耐久性能
Rotational Life 旋轉壽命: 1,000,000 cycles Min

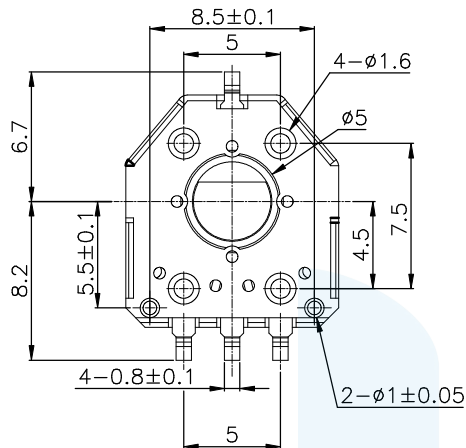

5	导体板	黄铜	鍍銀	1
4	电阻片本体	PPS	潔淨	1
3	刷子本体	PPS	潔淨	1
2	刷子	鍍銅	鍍銀	1
1	外壳	HTN	潔淨	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

LZG LZG INDUSTRIAL CO. LTD

DRAWING:	林生财	DATE:	2020.02.18	SCALE	1:1
CHECK:	李宏鑫	DATE:	2020.02.18	MATERIAL	*
APPROVAL:	杨进宝	DATE:	2020.02.18	DWG. NO.	
DRAWING NO.	ZB1109-R-B10Ka(333)			SHEET	1/1

PART NAME	R1109 Series	TOLERANCE UNLESS	0.0±0.35	0.°±2°	UNIT:	
PART NO.	ZB1109-R-B10Ka(333)	OTHERWISE SPECIFIED:	0.00±0.25 0.000±0.15	0.0°±1° 0.00°±0.5°	mm	