

You are here: [Products](#) » [Heatsinks f.cool](#) » [Profile heatsinks and fluid coolers](#) » [Extruded heatsinks for lock-in retaining spring](#) » [SK 489 ...](#) » [SK 489](#)



▼ Heatsinks f.cool

- ▼ Profile heatsinks and fluid coolers
 - Standard extruded heatsinks
 - [Extruded heatsinks for lock-in retaining spring](#)
 - Extruded heatsinks for PCB mounting
 - Extruded heatsinks for DC/DC converter
 - Retaining springs for transistors
 - U-Extruded heatsinks
 - Die-cast heatsinks
 - Fin coolers
 - Fluid coolers
 - Aluminium flat-, quadrangular-, angled-, U- and T-profiles

► Heatsinks and active heatsinks for processors

► Board Level heatsinks

► Cooling aggregates

► Accessories for electronic components

► Cases f.case

► Connectors f.con

Extruded heatsinks for lock-in retaining spring


SK 489 ...

SK 489 100 SA

29,4 x 45 mm, for THFU 1-6, profile threads

Data sheet

add to request

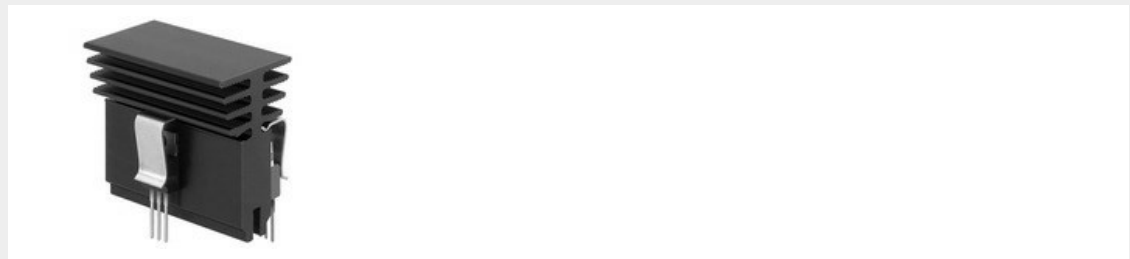

Features

Technical Drawing

Service

Accessories / related products

