

1

2

3

4

5

6

7

8

9

10

RoHS

12.00

12.02


15.00

20.00

7.98

7.10

4.50

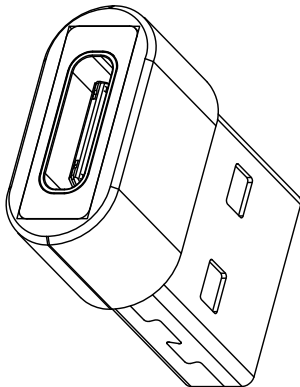

MAPX

MODIFICATION

DRW

DATE

NOTES:

SPECIFICATION:

- CURRENT RATING: 3.0A MAX
- VOLTAGE: 100 VAC
- TEMPERATURE RANGE: -30 °C ~ 85 °C

7	SHELL	塑料 (聚碳酸酯)	BLACK (可订制)	1PCS
6	SHELL	SPCC	NI Plated	1PCS
5	CONTACT	PCB (镀锡铜电阻)	Au20"	1SET
4	HOUSING	PBT	BLACK	1PCS
3	SHELL	STAINLESS STEEL	NI Plated	1PCS
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

产品图

PRODUCT CHART DWG

深圳市精拓金电子有限公司

Shenzhen Jing Tuo Jin Electronics Co., Ltd.

公差一览表

TOLERANCE UNLESS OTHERWISE

X. ±0.25 X. ±5°

X. ±0.20 X. ±2°

.XX ±0.05 .XX ±1°

.XXX ±0.02 .XXX ±0.5°

单位

MM

制图

YANG

制料号

917-B88C201AH70204

比例

1:1

审核

郭治富

产品名

转接头PE-0母头转PC0.120.15黑胶+红铜壳

日期

2020-05-22

核准

黄国荣

角法

版

AD

DATE

APPD

VER

AD