


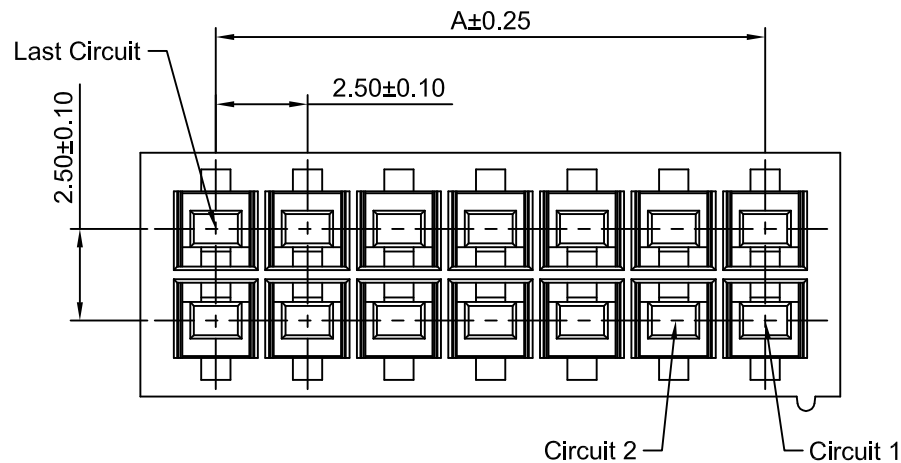

Ordering Information:

B2512H-2xXP - *** - ***
1 2 3

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.




3.Color:

(Blank): see section 2 material

BK: Black BL: Blue

RD: Red YL: Yellow

GY: Gray GN: Green

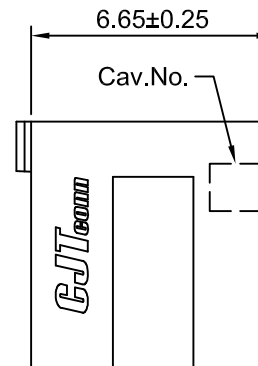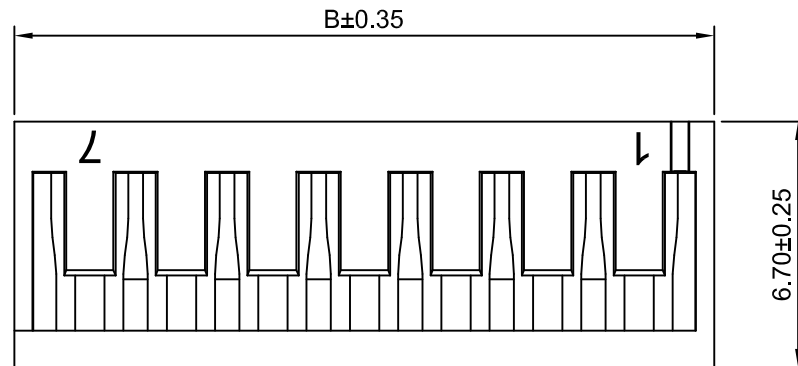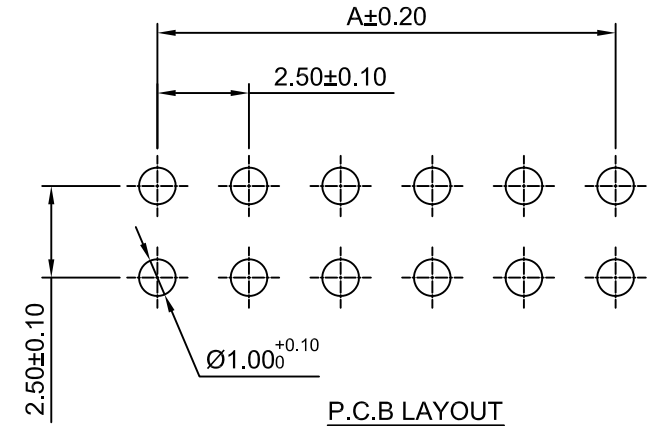

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact Resistance: $10\text{m}\Omega$ Max.

Insulation Resistance: $1000\text{M}\Omega$ Min.

Withstanding Voltage: 1000V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		Part NO.	Dimensions(mm)	
	A	B		A	B
2x2P	2.50	6.60	2x12P	27.50	31.60
2x3P	5.00	9.10	2x13P	30.00	34.10
2x4P	7.50	11.60	2x14P	32.50	36.60
2x5P	10.00	14.10	2x15P	35.00	39.10
2x6P	12.50	16.60	2x16P	37.50	41.60
2x7P	15.00	19.10	2x17P	40.00	44.10
2x8P	17.50	21.60	2x18P	42.50	46.60
2x9P	20.00	24.10	2x19P	45.00	49.10
2x10P	22.50	26.60	2x20P	47.50	51.60
2x11P	25.00	29.10			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	5:1	1 of 1	2.50mm PITCH DUAL ROW HOUSING		
DRAWN	CHKD	APPR			
Chengbiao Ye	Djankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			B2512H-2xXP		A0

A0	NEW RELEASE	2016.06.13
REV	DESCRIPTION	DATE