

Actuator

17-
391352Z

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/17-391352Z>

Your product:



17-391352Z Actuator

FRONT

Front form:	round
Front dimension:	Ø 16 mm
Reflector:	Plastic, Black

MOUNTING

Mounting cut-out:	Ø 16.2 mm
Design:	raised

OPERATING-/INDICATION PART

Illumination colour:	Yellow
-----------------------------	--------

ELECTRICAL CHARACTERISTICS

Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector
Operating voltage:	24 V DC ±10 %
Lumi. Intensity:	1640 mcd
Operation current:	3 mA ±15 %

MECHANICAL CHARACTERISTIC

Tightening torque:	Fixing nut max. 0.2 Nm
Weight:	0.007 kg
Terminal:	Plug-in terminal, 2.8 x 0.8 mm

AMBIENT CONDITION

Operating temperature: - 20 °C ... + 60 °C

Storage temperature: - 25 °C ... + 80 °C

IP Protection: IP40 front side, IP65 front side, according to IEC 60529

CERTIFICATE

Conformities: 2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)

Approbations: UL


OTHER

Short Description: Actuator, Ø 16.2 mm, Ø 16 mm, round, Plug-in terminal, 2.8 x 0.8 mm, Yellow


Kind of illumination: Single-LED

Hints: Maximum panel thickness 6 mm, Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-)

Wiring diagrams:

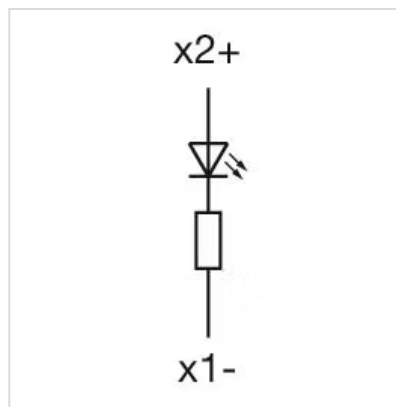

Dimension drawings:

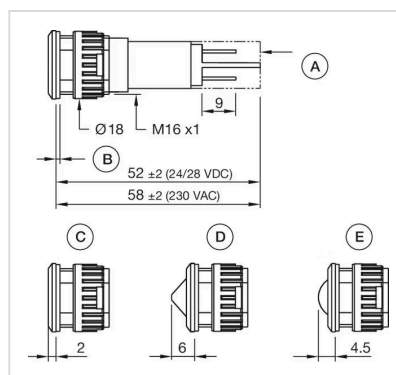

Mounting cut-outs:

