

1

2

3

4

A

A

B







B

C


C

D

D

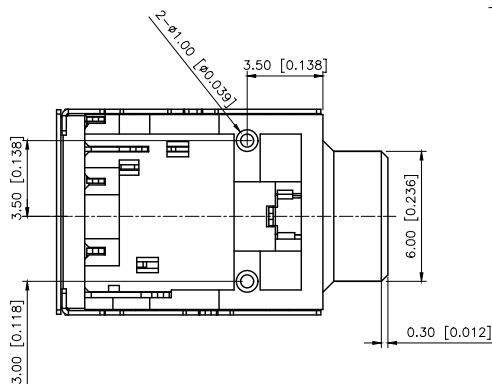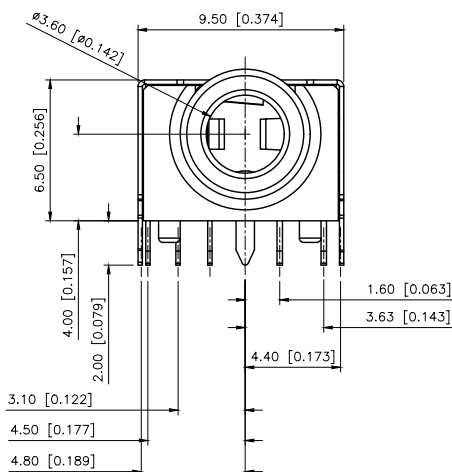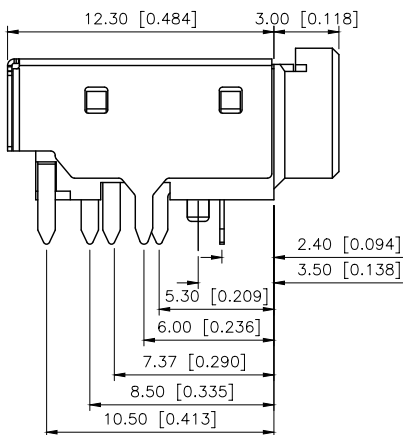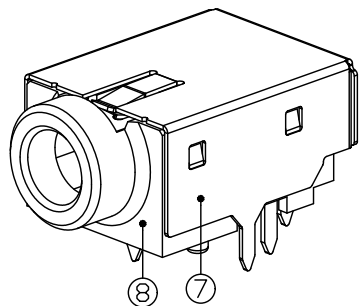


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.27	阿树

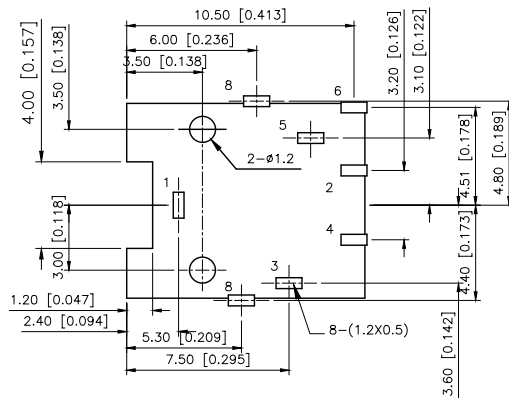

P.C.B LAYOUT
TOP VIEW

Rated Load DC30V 0.5A
Contact Resistance <30mΩ
Insulation Resistance >100MΩ
Withstand Voltage AC500V(50Hz)/min
Actuating Force 3~30N
Life 5000 Cycles



Model No.	Color
PJ-3043-B	BLACK
PJ-3043-R	Red
PJ-3043-G	Green

			MATERIAL	PLATING
8	SHELL	1	SUS301 0.2t	Ni60U"
7	HOUSING	1	PA9T	
6	CONTACT FOOT	1	COPPER ALLOY C5191	Ag15u" OVER Ni20U"
5	SPRING PIECE	1	COPPER ALLOY C5191	Ag15u" OVER Ni20U"
4	CURVE PIECE	1	COPPER ALLOY C5191	Ag15u" OVER Ni20U"
3	SPRING PIECE	1	COPPER ALLOY C5191	Ag15u" OVER Ni20U"
2	SPRING PIECE	1	COPPER ALLOY C5191	Ag15u" OVER Ni20U"
1	CONTACT FOOT	1	COPPER ALLOY C5191	Ag15u" OVER Ni50U"

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN
CHECKED
APPROVED

阿树

VIEW:

UNIT: mm/in

SIZE: A4

MODEL TYPE:
3.5 PHONE JACK

PART NO.:
PJ-3043-R

DWG NO.:
X-PJ-3043-R

SCALE	PAGE	REVISION
N/A	1/1	A1

1

2

3

4

www.helloxkb.com

www.helloxkb.cn

www.xk-dg.cn

XKB INDUSTRIAL PRECISION CO.,LIMITED