

| 标 记<br>MARK | ECN编号/变更内容<br>ECN NO/DEFINITION | 修 改<br>REVISE | 日 期<br>DATE | 核 准<br>APPROVE |
|-------------|---------------------------------|---------------|-------------|----------------|
|             |                                 |               |             |                |

A

B

C

D

E

F

G

A

B




C

D

E

F

G

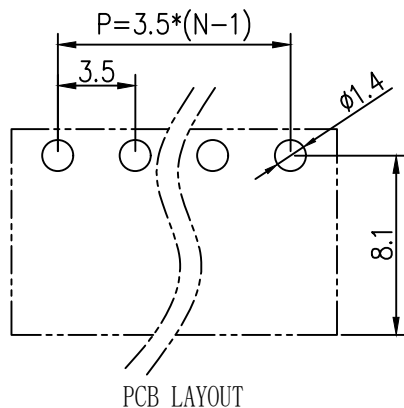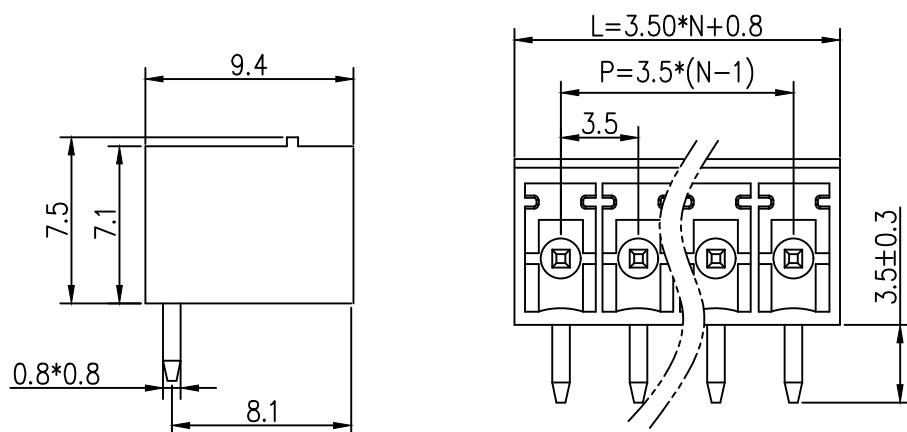

PCB LAYOUT

## Materials and Electroplating

- ①. Plastic body: PA66,
- ②. Solder pin: copper, Nickel tin plating

## Electrical performance

Rated voltage: 300V

Rated current: 8A

Contact resistance: 20m Ω (Max)

Insulation resistance: 500M Ω \ DC500V

Voltage endurance: AC1500V \ 1min

## mechanical properties

Temperature range: -40 ℃~+105 ℃

Instantaneous temperature: +250 ℃, 5 seconds

| 2   | 插针  | 铜    | 镀镍锡   |     |
|-----|-----|------|-------|-----|
| 1   | 基座  | PA66 | 绿色    |     |
| 序 号 | 品 名 | 材 质  | 电镀/颜色 | 备 注 |

|                                                                                       |             |                                                                                       |                |                                                                                       |      |
|---------------------------------------------------------------------------------------|-------------|---------------------------------------------------------------------------------------|----------------|---------------------------------------------------------------------------------------|------|
|  | 深圳市虹成电子有限公司 |                                                                                       | 品 名<br>TITLE   | 接线端子                                                                                  |      |
|                                                                                       |             |                                                                                       | 料 号<br>PART NO | HC-JXDZRC-3.5-3P                                                                      |      |
| GENERAL TOLERANCES<br>(UNLESS SPECIFIED)                                              |             | 比 例<br>SCALE                                                                          | 1:1            |  |      |
| 公差参数                                                                                  |             | 单 位<br>UNIT                                                                           | MM             | 制 图<br>DRAW                                                                           | AhYe |
| 2-6P ±0.10 ±0.20 X.X ±0.35                                                            |             | 张 数<br>PART NO                                                                        | 1 OF 1         | 审 核<br>CHECKED                                                                        | 夏操云  |
| 7-12P ±0.20 ±0.30 X.XX ±0.25                                                          |             | 版 本<br>REV                                                                            | A              | 批 准<br>APPROVE                                                                        | 赵亮亮  |
| 13-18P ±0.25 ±0.40 X.XXX ±0.15                                                        |             |  |                |                                                                                       |      |
| 19-24P ±0.30 ±0.50 X.XXX ±0.15                                                        |             |  |                |                                                                                       |      |