
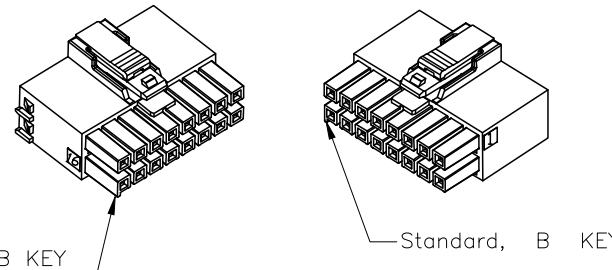


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.12.13	阿树

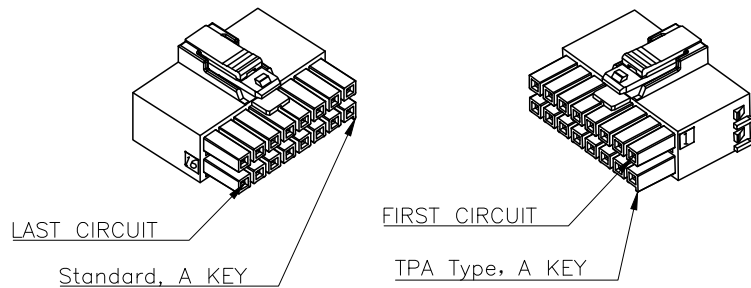

Specifications:

规格:

Voltage rating:400V AC/DC

额定电压: 400V AC/DC

Current rating:14A AC/DC

额定电流: 14A AC/DC

Withstanding voltage:1800V AC/minute

耐受电压: 1800V AC/分钟

Temperature range:-40℃~+125℃

温度范围: -40℃~+125℃

Insulation resistance:1000MΩ min

绝缘电阻: 1000MΩ Min

Contact resistance:10mΩ Max

接触电阻: 10mΩ Max

PART NO.:

X3501 H-2x04 A-N0
① ② ③ ④ ⑤

①Series No

②Category:H-HSG

③Row No.Pin No:2xXX-2x02~2x12P

④Category:

A:TPA Type, A KEY Black




B:TPA Type, B KEY Nature

A0:Standard, A KEY Black

B0:Standard, B KEY Nature

⑤Material:N0-Nylon UL94V-0

Poles	Dimensions	
	A	B
2x02	3.50	8.00
2x03	7.00	11.50
2x04	10.50	15.00
2x05	14.00	18.50
2x06	17.50	22.00
2x07	21.00	25.50
2x08	24.50	29.00
2x12	38.50	43.00

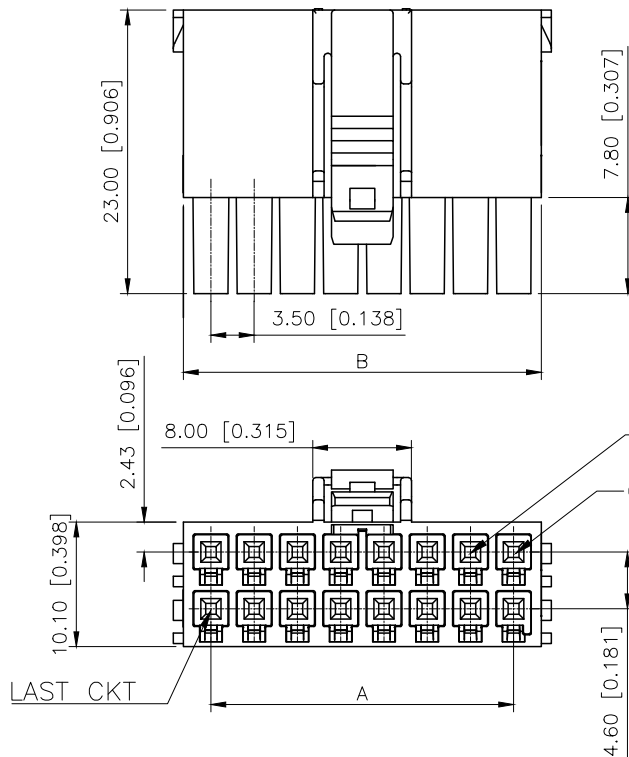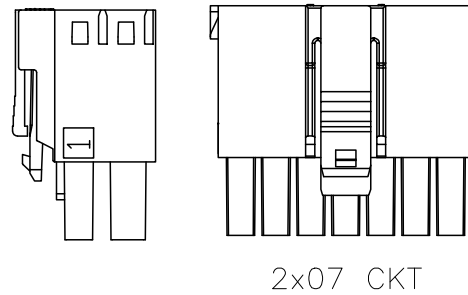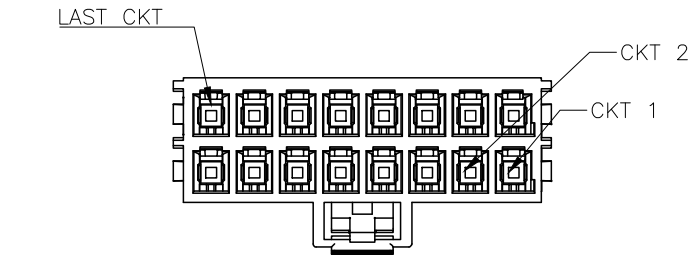

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	3.5mm Crimp Style Connector
CHECKED		UNIT:	mm/in	PART NO.:	X3501H-2x04A-N0
APPROVED		SIZE:	A4	DWG NO.:	X-X3501H-2x04A-N0