
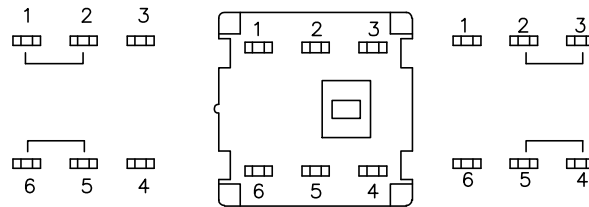


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		图面升级整理图面	2025.06.23	阿树
A2	ECN-P-2026040904		焊脚电路图修正	2026.04.09	山楂



FREE

PUSH

■ SPECIFICATIONS

1.ELECTRICAL

Con tact rating	0.1A,30VDC
Con tact resistance	50mΩ Max
Insulation resistance	100MΩ Min .at 250VDC
Dielectric strength	250VAC Min .for 60sec


2.MECHANICAL AND ENVIRONMENTAL

●Temperature ratong	Operating -15 to +55 storage.-25 to +65
● Operation	160±80gf
● Stroke	Lock Stroke 2.0±0.2mm Full stroke,2.5±0.2mm
● Operating life	Full load:1x10 ⁴ cycles N0 load:1x10 ⁵ cycles
● Con tact form	DPDT

PAPT NO	XKB8585-W-245
OPERATION	W:NO LOCK Z:LOCK

FEATURES

Light operating force
Long term low con tact resistance
Momentary or lating operation
Compact spacing on PCB of 8.5mm
Short stroke 2.0mm to latch

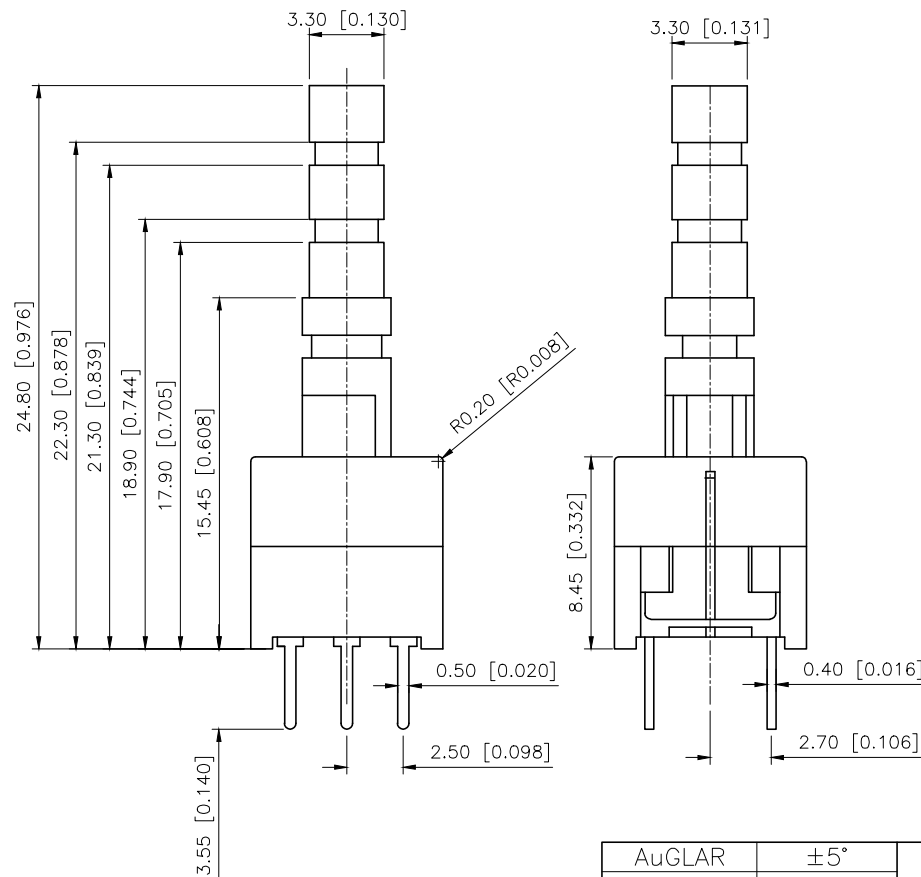

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN
CHECKED
APPROVED

山楂

VIEW:

UNIT: mm/in

SIZE: A4

MODEL TYPE:
KEY SWITCH

PART NO.:
XKB8585-W-245

DWG NO.:

SCALE	PAGE	REVISION
N/A	1/1	A2