
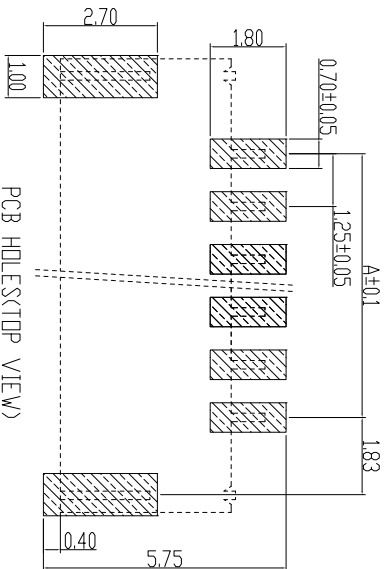
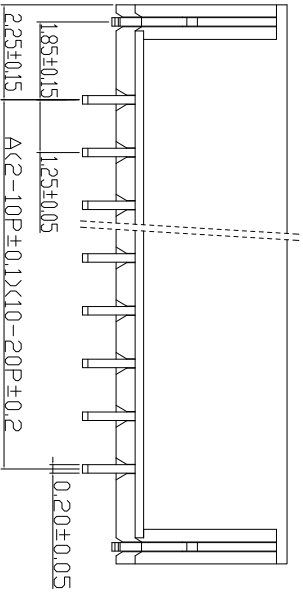
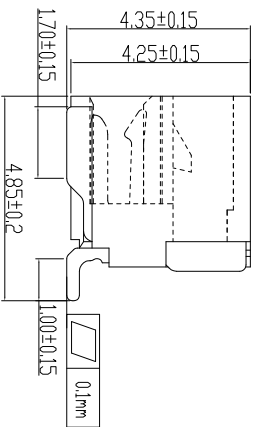


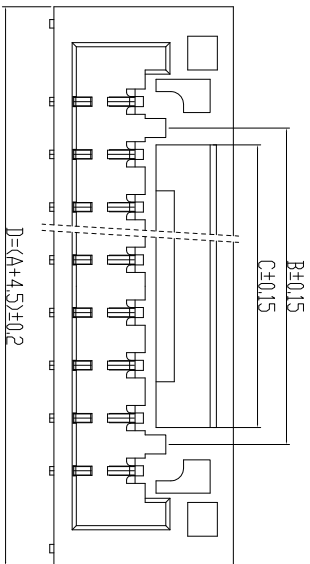







GENERAL TOLERANCE:±0.05mm

- TECHNICAL REQUIREMENTS:
1. RATED LOAD: 1.0 AC/DC, 50V AC/DC;
 2. CONTACT RESISTANCE: ≤20mΩ;
 3. INSULATION RESISTANCE: ≥100MΩ;
 4. DIELECTRIC STRENGTH: 500VAC/1Min;
 5. OPERATING TEMPERATURE RANGE: -25°C TO 105°C;

PRODUCT NAME	1.25GH FLAT CABLE CONNECTOR		
	A-(mm)	B-(mm)	C-(mm)
1.25GH-NAWT	1.25mm	-----	2.10mm
1.25GH-02AWT	1.25mm	-----	2.10mm
1.25GH-03AWT	2.50mm	-----	3.45mm
1.25GH-04AWT	3.75mm	-----	4.30mm
1.25GH-05AWT	5.00mm	-----	5.45mm
1.25GH-06AWT	6.25mm	-----	6.70mm
1.25GH-07AWT	7.50mm	-----	6.70mm
1.25GH-08AWT	8.75mm	7.50mm	6.70mm
1.25GH-09AWT	10.00mm	8.75mm	6.70mm
1.25GH-10AWT	11.25mm	10.00mm	8.70mm
1.25GH-11AWT	12.50mm	11.25mm	8.70mm
1.25GH-12AWT	13.75mm	12.50mm	8.70mm
1.25GH-13AWT	15.00mm	13.75mm	8.70mm
1.25GH-14AWT	16.25mm	12.50mm	8.70mm
1.25GH-15AWT	17.50mm	13.75mm	8.70mm
1.25GH-16AWT	18.75mm	15.00mm	8.70mm
1.25GH-17AWT	20.00mm	16.25mm	8.70mm
1.25GH-18AWT	21.25mm	17.50mm	8.70mm
1.25GH-19AWT	22.50mm	18.75mm	8.70mm
1.25GH-20AWT	23.75mm	20.00mm	8.70mm

2	TERMINAL	1	BRASS	Sn PLATING	
1	BASE	1	LCP/PA9T	BEIGE	
NO	NAME	QTY	MATERIAL	EP/COLOR	NOTE

TOLERANCE UNLESS OTHERWISE SPEC		ZHEJIANG FUGANG ELECTRONICS CO.,LTD					
BASIC DIMENSION	TOLERANCE	DSND	J	Y	26.05.22	TITLE:PIN HOLDER	
x.x	±0.30	CHKD	Y	H	C	26.05.22	PART NO:1.25GH-NAWT
x.x x	±0.20	APVD	L	P	J	26.05.22	
x.x x x	±0.10						Rev:A
ANGLES	±3°				UNIT:mm	SCALE:1:1	SIZE:A4
							SHEET:1/1



2P





3P

4P

5P

6P

7P






8P

9P

10P



11P



12P

13P





14P



15P

16P

TOLERANCE UNLESS OTHERWISE SPEC		ZHEJIANG FUGANG ELECTRONICS CO.,LTD									
BASIC DIMENSION	TOLERANCE	DSND	J	Y	26.05.22	TITLE:PIN HOLDER					
		CHKD	Y	H	C	26.05.22	PART NO:1,25GH-NALTY/WT				
	x.x	±0.30	APVD		L	P	J	26.05.22	Rev:A		
	x.xxx	±0.20									
	x.xxx	±0.10									
ANGLES	±3°					UNIT:mm	SCALE:1:1	SIZE:A4	SHEET:1/1		

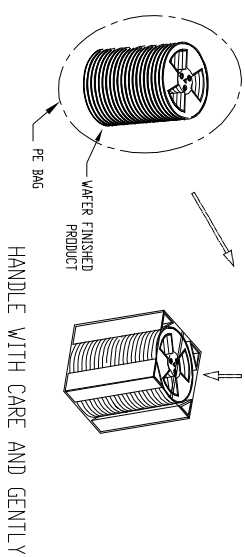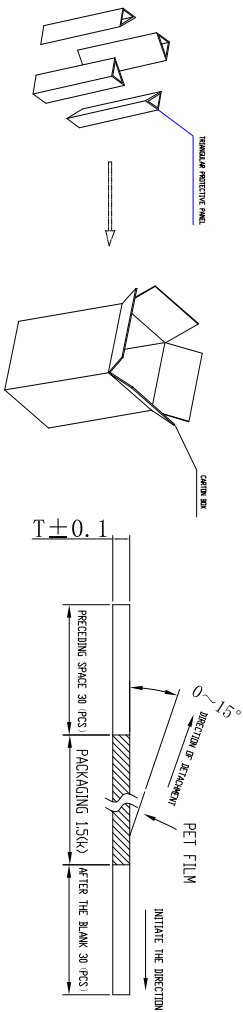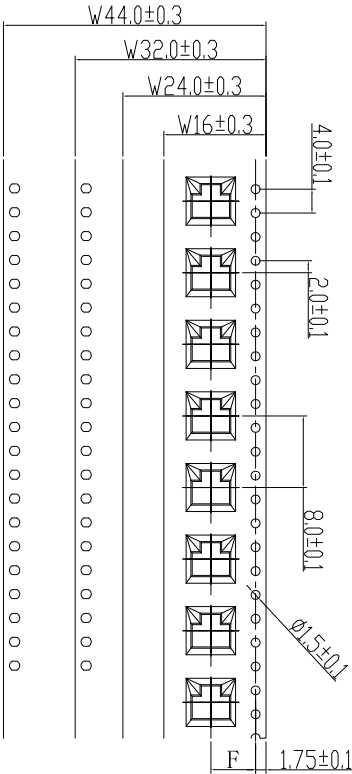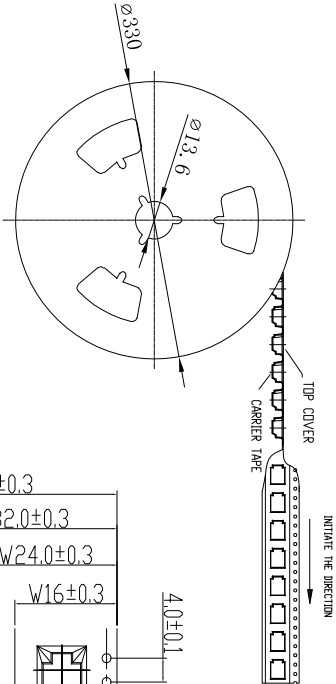

THE ILLUSTRATIONS OF THE REEL, THE TAPE CARRIER, AND THE OUTER BOX ARE FOR REFERENCE ONLY .

PRODUCT NAME		CARRIER SIZE		
1.25GH-NAW/T	W	Bo	F	
2P	16±0.3	6.10±0.1	7.5±0.1	
3P	16±0.3	7.35±0.1	7.5±0.1	
4P	16±0.3	8.60±0.1	7.5±0.1	
5P	24±0.3	9.85±0.1	7.5±0.1	
6P	24±0.3	11.10±0.1	7.5±0.1	
7P	24±0.3	12.35±0.1	7.5±0.1	
8P	24±0.3	13.60±0.1	11.5±0.1	
9P	24±0.3	14.85±0.1	11.5±0.1	
10P	24±0.3	16.10±0.1	11.5±0.1	
11P	32±0.3	17.35±0.1	14.2±0.1	
12P	32±0.3	18.60±0.1	14.2±0.1	
13P	32±0.3	19.85±0.1	14.2±0.1	
14P	32±0.3	21.10±0.1	14.2±0.1	
15P	44±0.3	22.35±0.1	20.2±0.1	
16P	44±0.3	23.60±0.1	20.2±0.1	

TRANSSHIPMENT PACKAGING DETAILS			
PIN	EACH TURN OF PACKAGING QUANTITY	THE NUMBER OF DISCS PER BOX	NUMBER OF ITEMS PER BOX
02P-04P	1500(PCS)	20 (PLATE)	30 (K)
05-10P	1500(PCS)	14 (PLATE)	21 (K)
11P-14P	1500(PCS)	11 (PLATE)	16.5 (K)
15P-16P	1500(PCS)	8 (PLATE)	12 (K)

TOLERANCE UNLESS OTHERWISE SPEC				
BASIC DIMENSION	TOLERANCE			
X.X	±0.30			
X.XX	±0.20			
X.XXX	±0.10			
ANGLES	±3°			

ZHEJIANG FUGANG ELECTRONICS CO.,LTD				
DSND	J	Y	TITLE:PIN HOLDER	
CHKD	Z	F	C	PART NO:1.25GH-NAW/T
APVD	L	P	J	26.05.21
		UNIT:mm	SCALE:1:1	SIZE:A4
				SHEET:1/1

Rev:A
