




REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.1.10	阿树

A



B

C



D

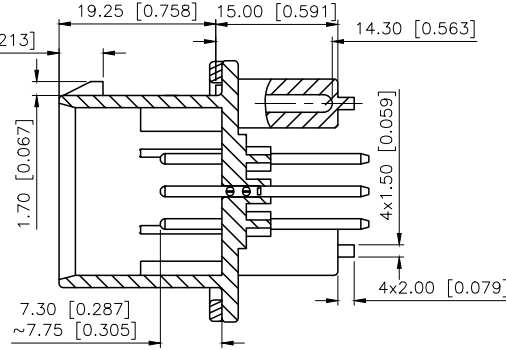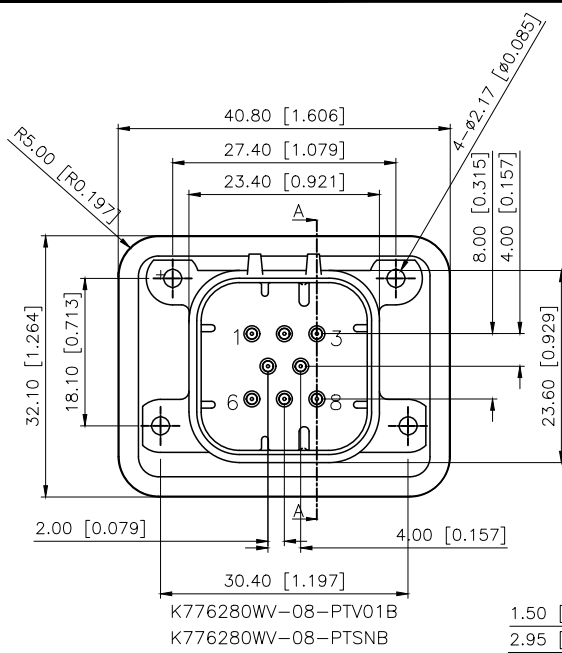


Current rating: 7A AC/DC
额定电流: 7A AC/DC
Temperature range: -40°C ~ +85°C
温度范围: -40°C ~ +85°C



K776280WV-08-PTV01W
K776280WV-08-PTS NW

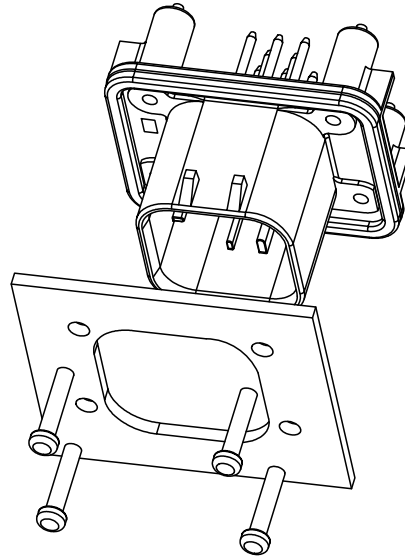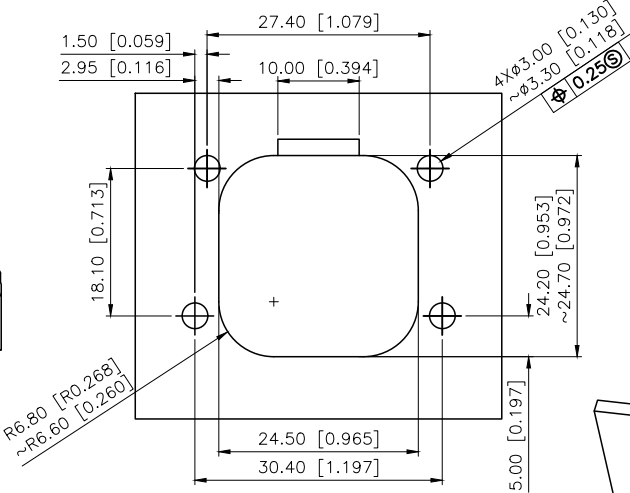

PCB LAYOUT

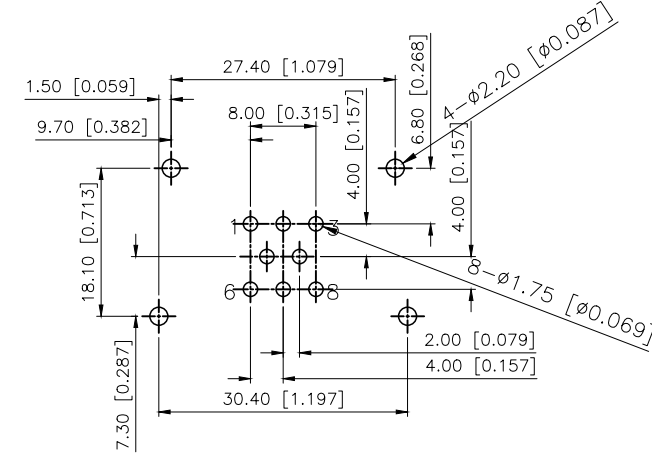

PART NO.:

K 776280 W V-08-PT SN B
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ①K:XKBTEK-Car Connector
- ②XKB Series No
- ③Category:W-Wafer
- ④Welding Board Rangle:V-Stright 180°
- ⑤Row No.Pin No:08 Pin
- ⑥Material:PT-PBT
- ⑦Palting:V01-Gold Flash ;SN-Plated Tin
- ⑧Color:X:B-Black; W-White;

PLAYTING	COLOR	NAME
Gold Flash	White	K776280WV-08-PTV01W
Gold Flash	Black	K776280WV-08-PTV01B
Plated Tin	White	K776280WV-08-PTS NW
Plated Tin	Black	K776280WV-08-PTS NB

K776280WV-08-PTS NB	PBT	Brass	K776280H
PART NO	Material	Material(Pin)	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:	MODEL TYPE:
CHECKED		UNIT: mm/in	4.0mm Automobile connector
APPROVED		SIZE: A4	PART NO.: K776280WV-08-PTS NB
			DWG NO.: X-K776280WV-08-PTS NB

SCALE	PAGE	REVISION
N/A	1/1	A1

A

B

C

D