
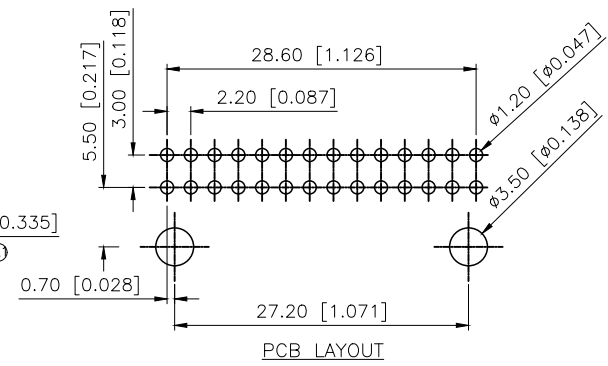
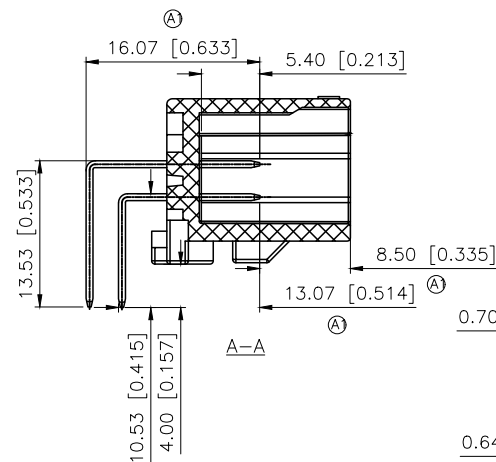


| REVISIONS |         |          |                    |            |        |
|-----------|---------|----------|--------------------|------------|--------|
| REV.      | ECN NO. | LOCATION | DESCRIPTION        | DATE       | DESIGN |
| A0        | N/A     | /        | INITIAL RELEASE    | /          | /      |
| A1        | N/A     | ㉓ X3     | pin针尺寸变更, 图面升级整理图面 | 2024.12.26 | 阿树     |





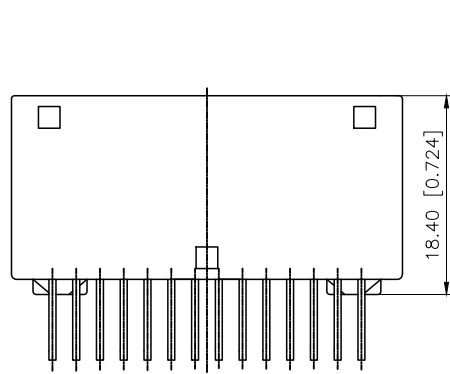


Current rating:3A AC/DC  
额定电流: 3A AC/DC  
Temperature range:-40℃-+125℃  
温度范围: -40℃-+125℃

PART NO.:

K 137635 W R-2x14-PT SN X  
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ①K:XKBTEK-Car Connector
- ②XKB Series No
- ③Category:W-Wafer
- ④Welding Board Range:R-Stright 90°
- ⑤Row No.Pin No:2x14 Pin
- ⑥Material:PT-PBT
- ⑦Palting:SN-Plated Tin
- ⑧Color:B-Black ; W-White

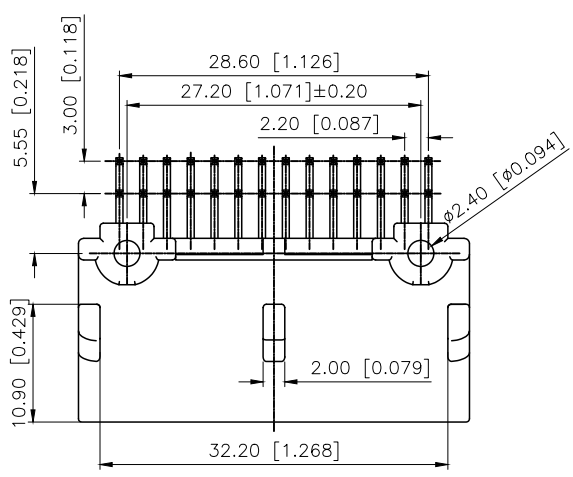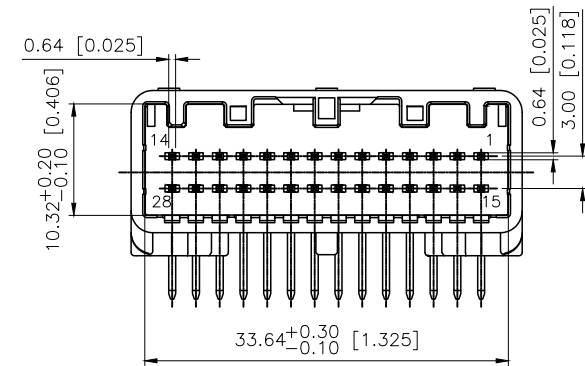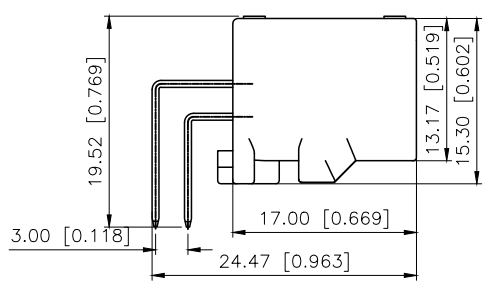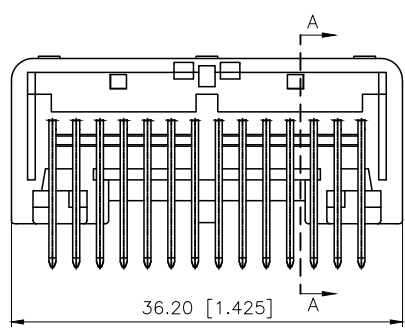

|                     |          |               |                      |
|---------------------|----------|---------------|----------------------|
| K137635WR-2xXX-PTSX | PBT      | Brass         | K137635HM            |
| PART NO             | Material | Material(Pin) | Suitable XKB Housing |

|                        |       |
|------------------------|-------|
| AuGLAR                 | ±5°   |
| X.                     | ±0.40 |
| X.x                    | ±0.30 |
| X.xx                   | ±0.20 |
| X.xxx                  | ±0.15 |
| UNSPECIFIED TOLERANCES |       |



|          |    |             |                                           |
|----------|----|-------------|-------------------------------------------|
| DESIGN   | 阿树 | VIEW:       | MODEL TYPE:<br>2.2mm Automobile connector |
| CHECKED  |    | UNIT: mm/in | PART NO.:<br>K137635WR-2x14-PTSX          |
| APPROVED |    | SIZE: A4    | DWG NO.:                                  |