

1

2






3

4

REVISIONS

REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.26	阿树

Temperature : -20~70 C
温度: -20~70 C
Rated Load: DC 30V 0.3A
额定负载: DC 30V 0.3A
Contact Resistance : <30mΩ
接触电阻 : <30mΩ
Insulation Resistance: >100M
绝缘电阻: >100M
Withstand Voltage : AC500V(50Hz)/min
耐受电压 : AC500V(50Hz)/min
Actuating Force : 2.2~30N
驱动力: 2.2~30N
Life : 3000N
寿命: 3000N

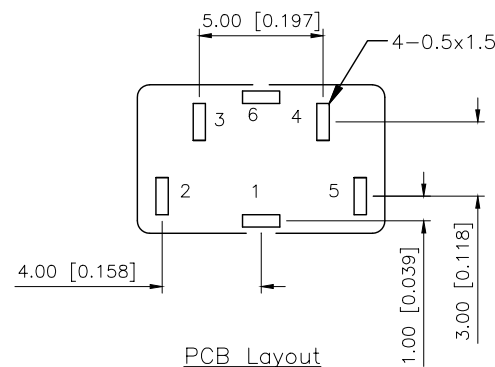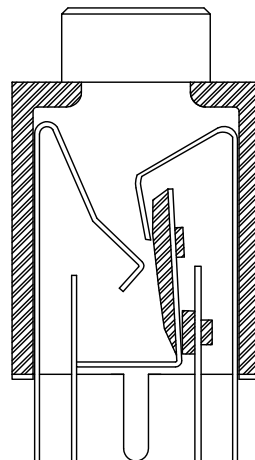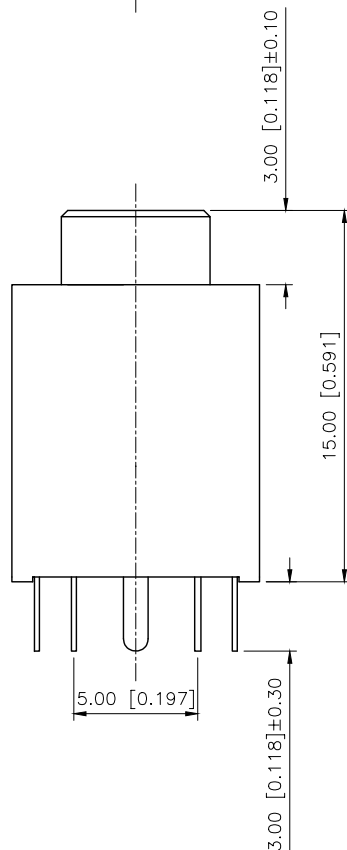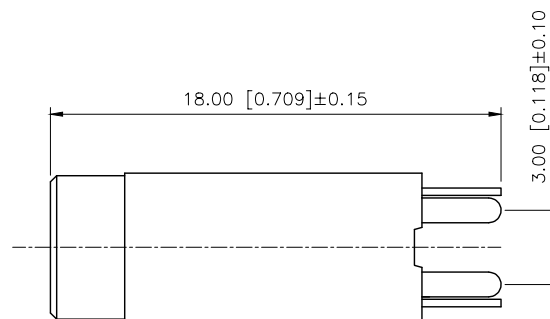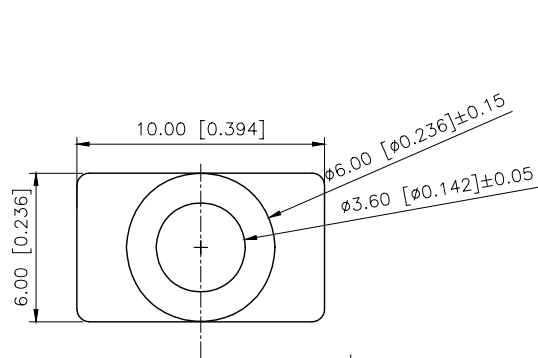

Model No.	PJ-359H-X
Schematic	
color	B:Black W:White

base	PBT	
copper bush	Brass	Tin
Plastic	Pom	
Plastic	PA66	
Terminal 6	Phosphor Bronze	Ag
Terminal 5	Phosphor Bronze	Ag
Terminal 4	Phosphor Bronze	Ag
Terminal 3	Phosphor Bronze	Ag
Terminal 2	Phosphor Bronze	Ag
Terminal 1	Phosphor Bronze	Ag
PAPT NAMF	MATERIAL	PLATING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	

XKLB 星城
Connection

DESIGN	阿树	VIEW:	MODEL TYPE: 3.5 PHONE JACK
CHECKED		UNIT: mm/in	PART NO.: PJ-359H-B
APPROVED		SIZE: A4	DWG NO.: X-PJ-359H-B
		SCALE	PAGE
		N/A	1/1
		REVISION	A1

1

2

3

4