

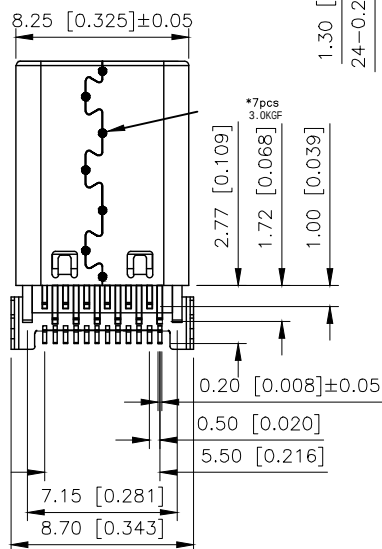
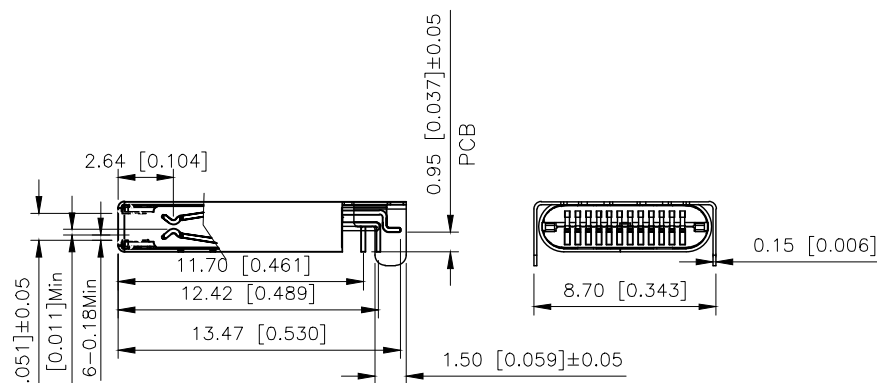




REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A			2024.11.19	
A2	N/A			2025.10.23	

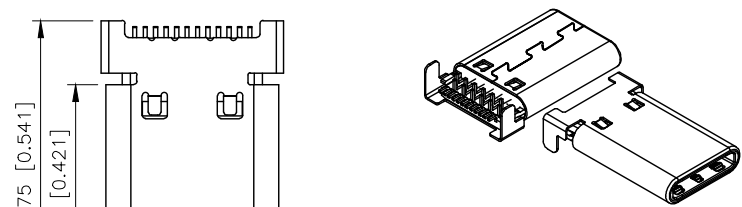

NOTES:
1.MATERIALI:
CONTACTS: Copper alloy T=0.15
INSULATOR: HIGH TEMPERATURE PLASTIC
UL 94V-0,
Shell: STEEL T=0.15
2.ELECTRICAL PERFORMANCE:
INSULATION RESISTANCE: 100Mohm MIN.
CONTACT RESISTANCE: 40mohm MAX.
DIELECTRIC WITHSTANDING: 100 VAC
CURRENT RATING: 5A MIN.
3.MECHANICAL PERFORMANCE:
MATING FORCE: 5~20N
UNMATING FORCE: 8~20N
DURABILITY: 10000 CYCLES

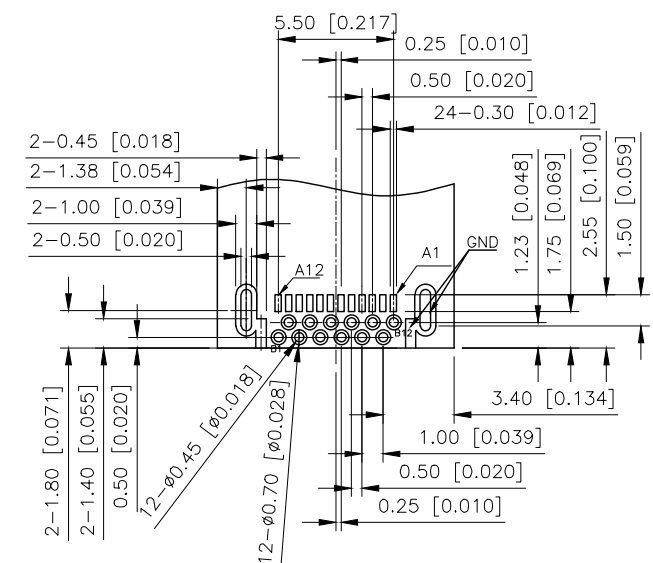

Recommended P.C.B Layout
Tolerance ±0.05

U261-241N-4BC2LS

- 1: Au 1U" MIN
2: Au 15U" MIN
3: Au 30U" MIN
1: WITH
2: WITHOUT
1: PBT
2: PA6T
3: PA9T
4: LCP
B: BLACK
U: BLUE
W: WHITE
C: CREAM-COLOR

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN		VIEW:	MODEL TYPE: USB TYPE C-24PIN PLUG
CHECKED		UNIT: mm/in	PART NO.: U261-241N-4BC2LS
APPROVED		SIZE: A4	DWG NO.: