

A





Specifications:

规格:

- 1.Voltage rating:250V AC/DC
额定电压: 250V AC/DC
 - 2.Current rating:3A AC/DC
额定电流: 3A AC/DC
 - 3.Withstanding voltage:500V AC/minute
耐受电压: 500V AC/分钟
 - 4.Temperature range: -55℃+105℃
温度范围: -55℃+105℃
 - 5.Insulation resistance:1000MΩ MIN
绝缘电阻:1000MΩ MIN
 - 6.Contact resistance:30mΩ Max
接触电阻: 30mΩ Max
- Material:
材料:
- 7.Rubber core:PBT UL94V-0
胶芯: PBT UL94V-0
 - 8.The iron shell:SPCC-SD Nivkel Plating/Tin Plating/Gold Plating
铁壳: SPCC-SD,镀镍/镀锡/镀金
 - 9.Terminal:Copper alloy
端子: 铜合金

NUMBER OF POSITIONS	DIMENSION			
	A $\pm$ 0.25	B $\pm$ 0.13	C $\pm$ 0.38	D $\pm$ 0.25
9	18.00	24.99	30.80	19.28
15	26.50	33.32	39.20	27.50
25	40.00	47.04	53.05	41.28
37	56.60	63.50	69.40	57.70

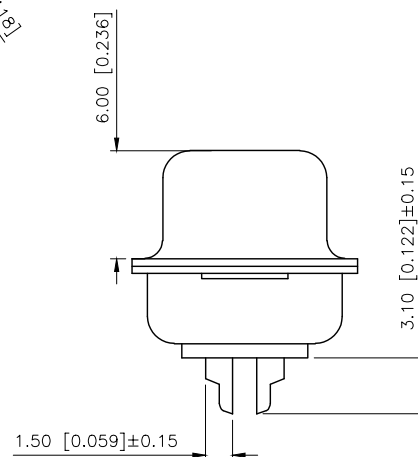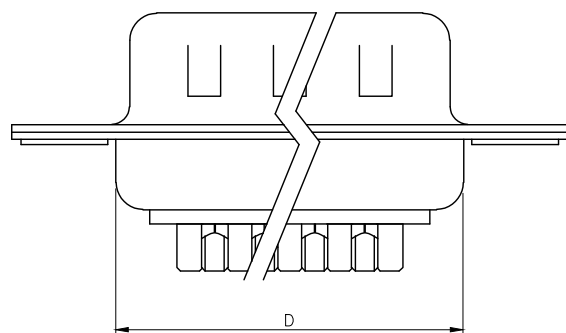

铆合方式	TYPE-1: 铆合	TYPE-2: 前铆实心螺母	TYPE-3: 后铆空心螺母	TYPE-4: 后铆空心螺母锁螺
图示				

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	

XKLB 星城
Connection

DESIGN	阿树	VIEW:		MODEL TYPE:	D-SUB		
CHECKED		UNIT: mm/in		PART NO.:	X0125WT12B1L		
APPROVED		SIZE: A4		DWG NO.:	X-X0125WT12B1L		
PRECISION CO.,LIMITED				SCALE	PAGE	REVISION	
				N/A	1/1	A1	