

标 记
MARKECN编号/变更内容
ECN NO/DEFINITION修 改
REVISE日 期
DATE核 准
APPROVE

A

B

C

D

E

F

G

A

B






C

D

E

F

G

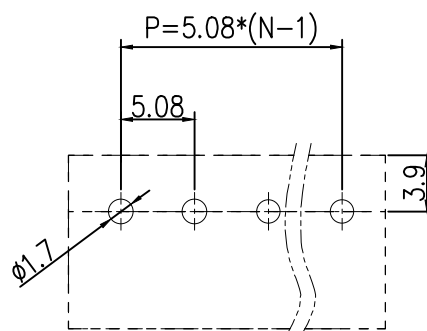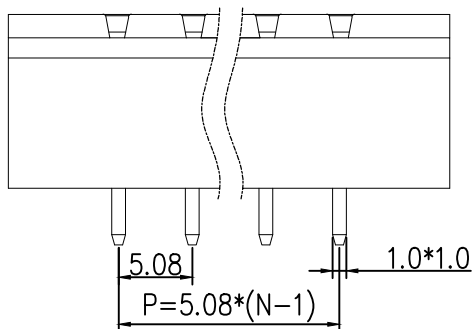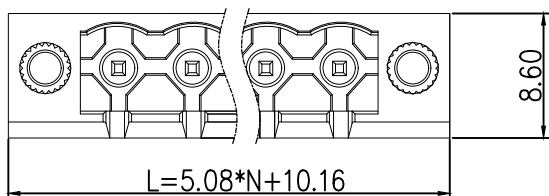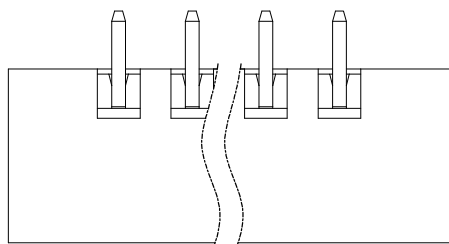

PCB LAYOUT


Materials and Electroplating

- ①. Plastic body: PA66
②. Solder pin: copper, nickel tin plated
③. Nut: Copper, Nickel Plated

Electrical performance

Rated voltage: 300V
Rated current: 15A
Contact resistance: 20m Ω (Max)
Insulation resistance: 500M Ω \ DC500V
Voltage endurance: AC1500V \ 1Min
mechanical properties
Temperature range: -40 °C~+105 °C
Instantaneous temperature: +250 °C, 5 seconds

2	插针	铜	镀镍锡	
1	底座	PA66	绿色	
序号	品名	材质	电镀/颜色	备注

	品名 TITLE		接线端子	
	料号 PART NO		HC-JXDZVM-5.08-4P	
GENERAL TOLERANCES (UNLESS SPECIFIED)		比列 SCALE	1:1	
单位 UNIT		MM	制图 DRAW	AhYe
张数 PART NO		1 OF 1	审核 CHECKED	夏操云
版本 REV		A	批准 APPROVE	赵亮亮

公差参数	公差	公差	公差
2-6P	±0.10	±0.20	X.xxx ±0.15
7-12P	±0.20	±0.30	X.xx ±0.25
13-18P	±0.25	±0.40	X.x ±0.35
19-24P	±0.30	±0.50	

