


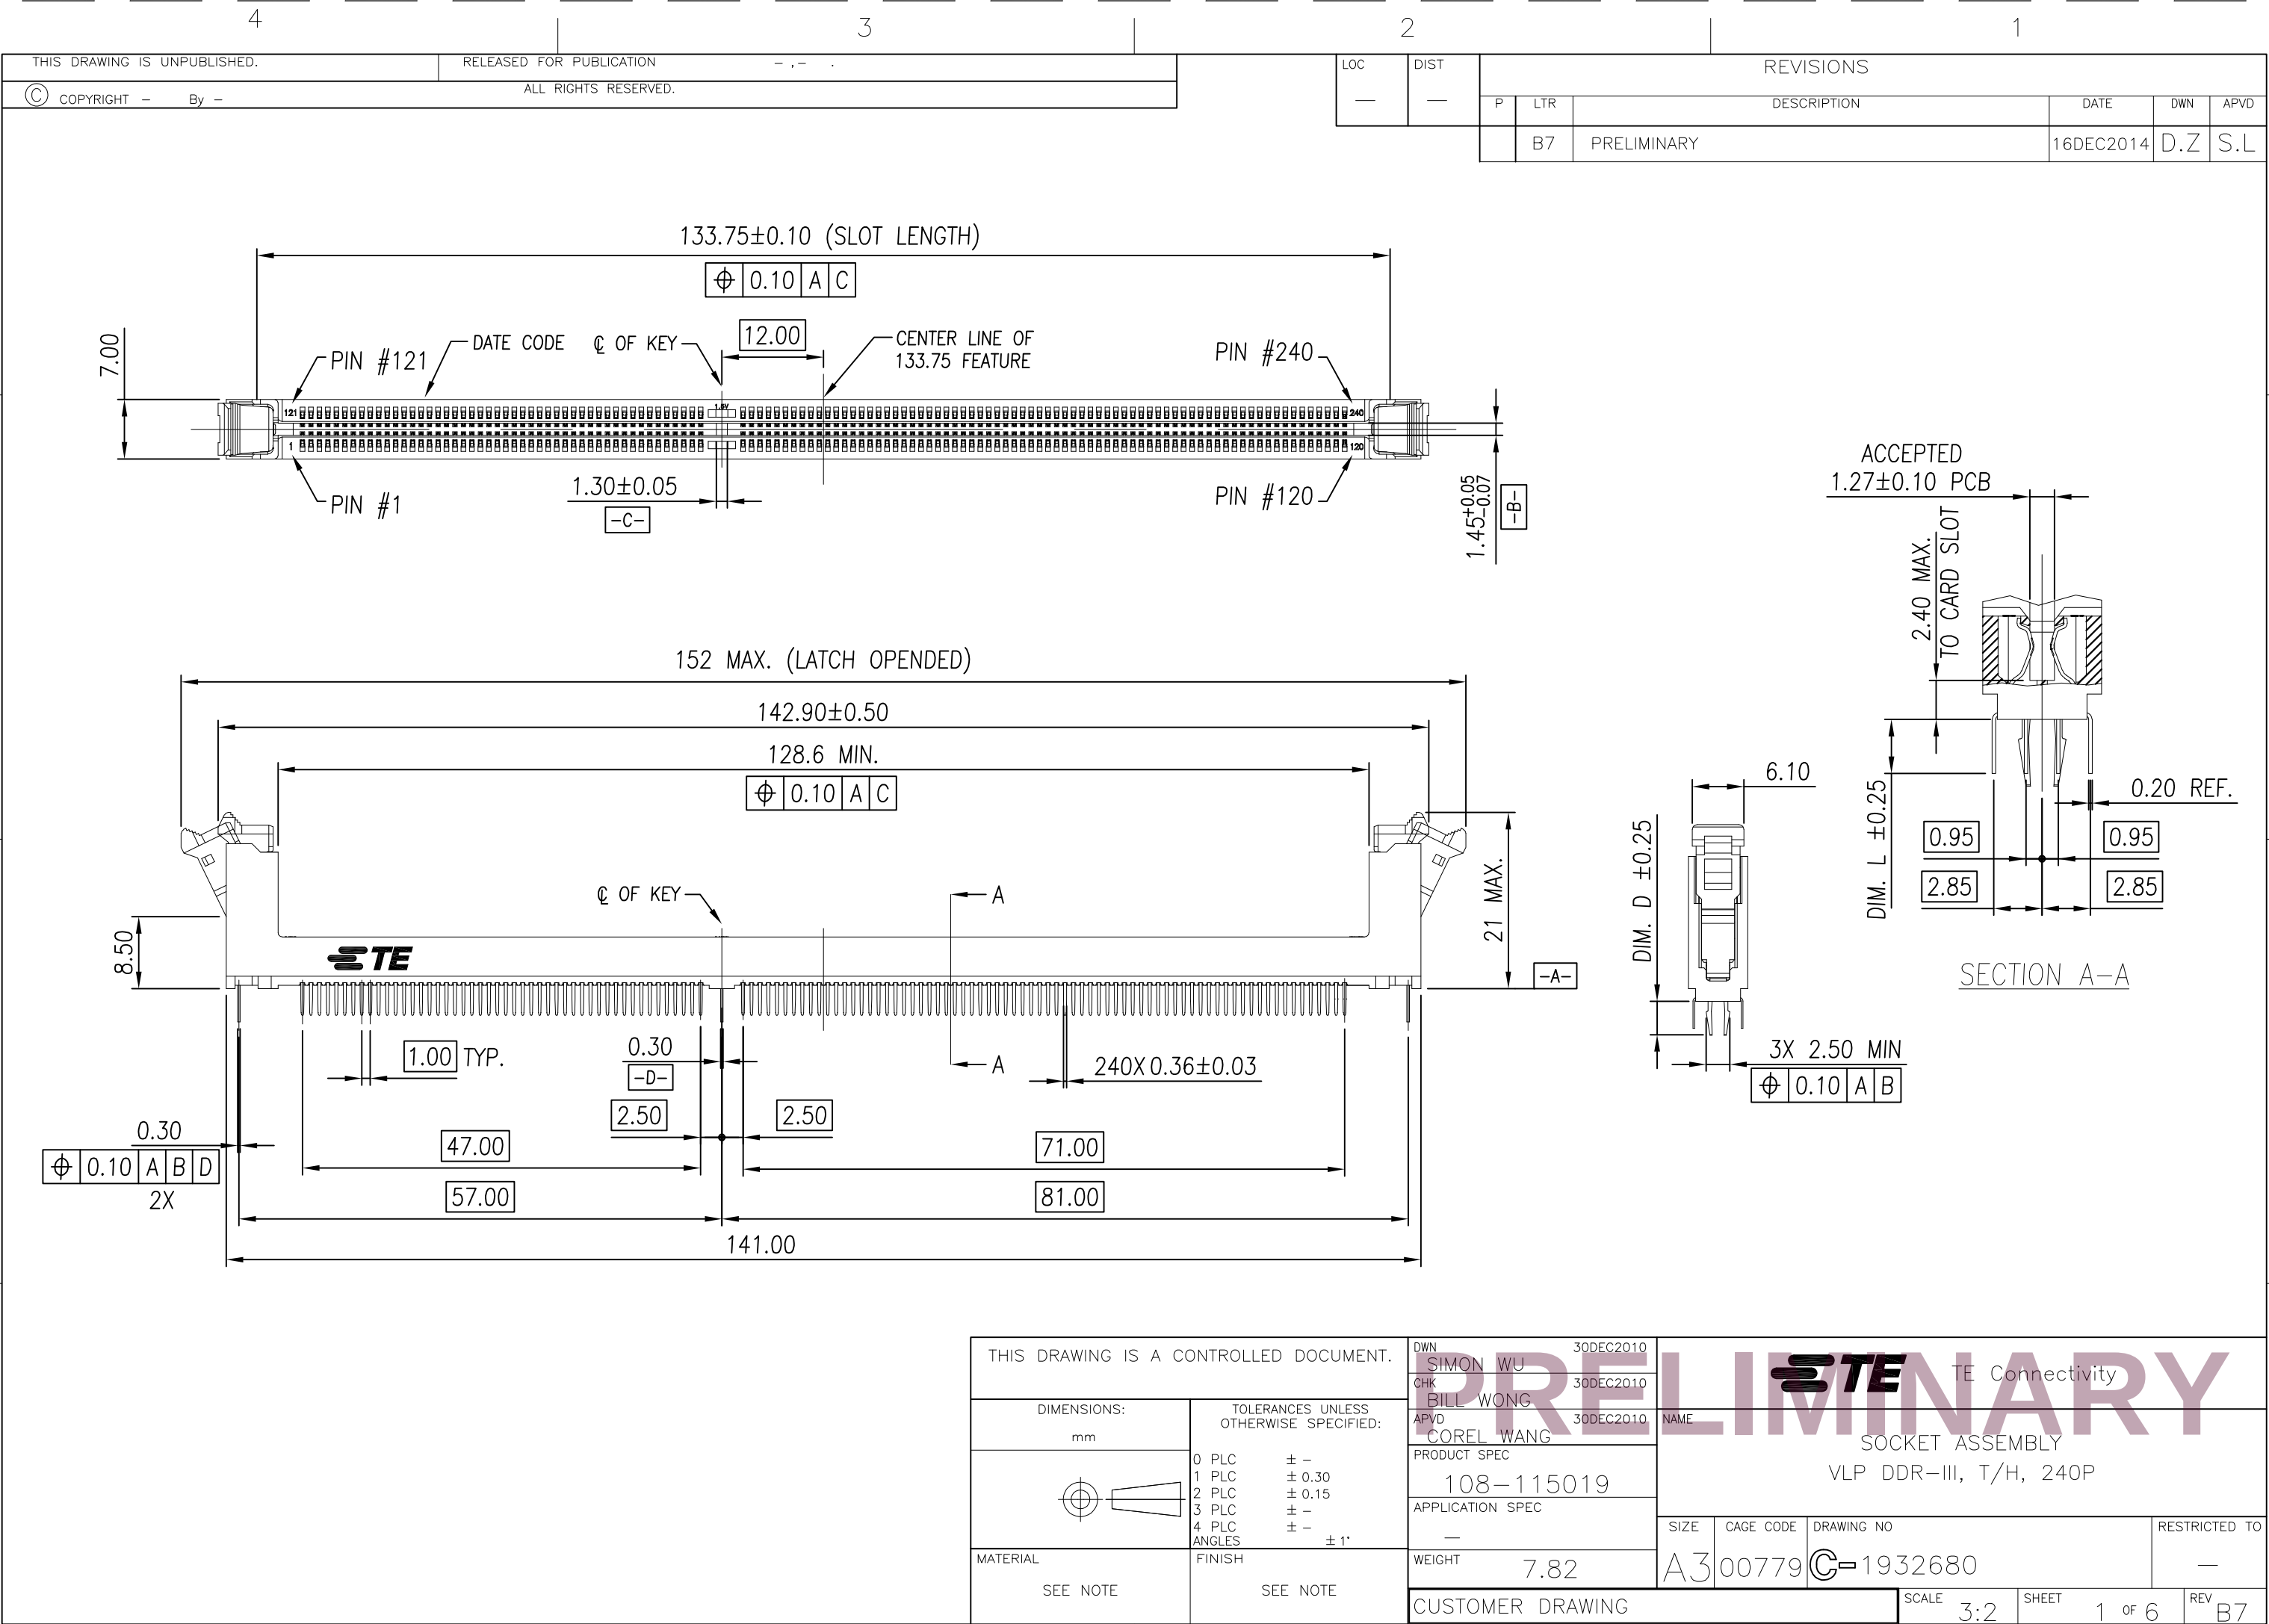

[illegible]

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-

©

COPYRIGHT - By -

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR



DESCRIPTION

DATE

DWN

APVD


SEE SHEET 1

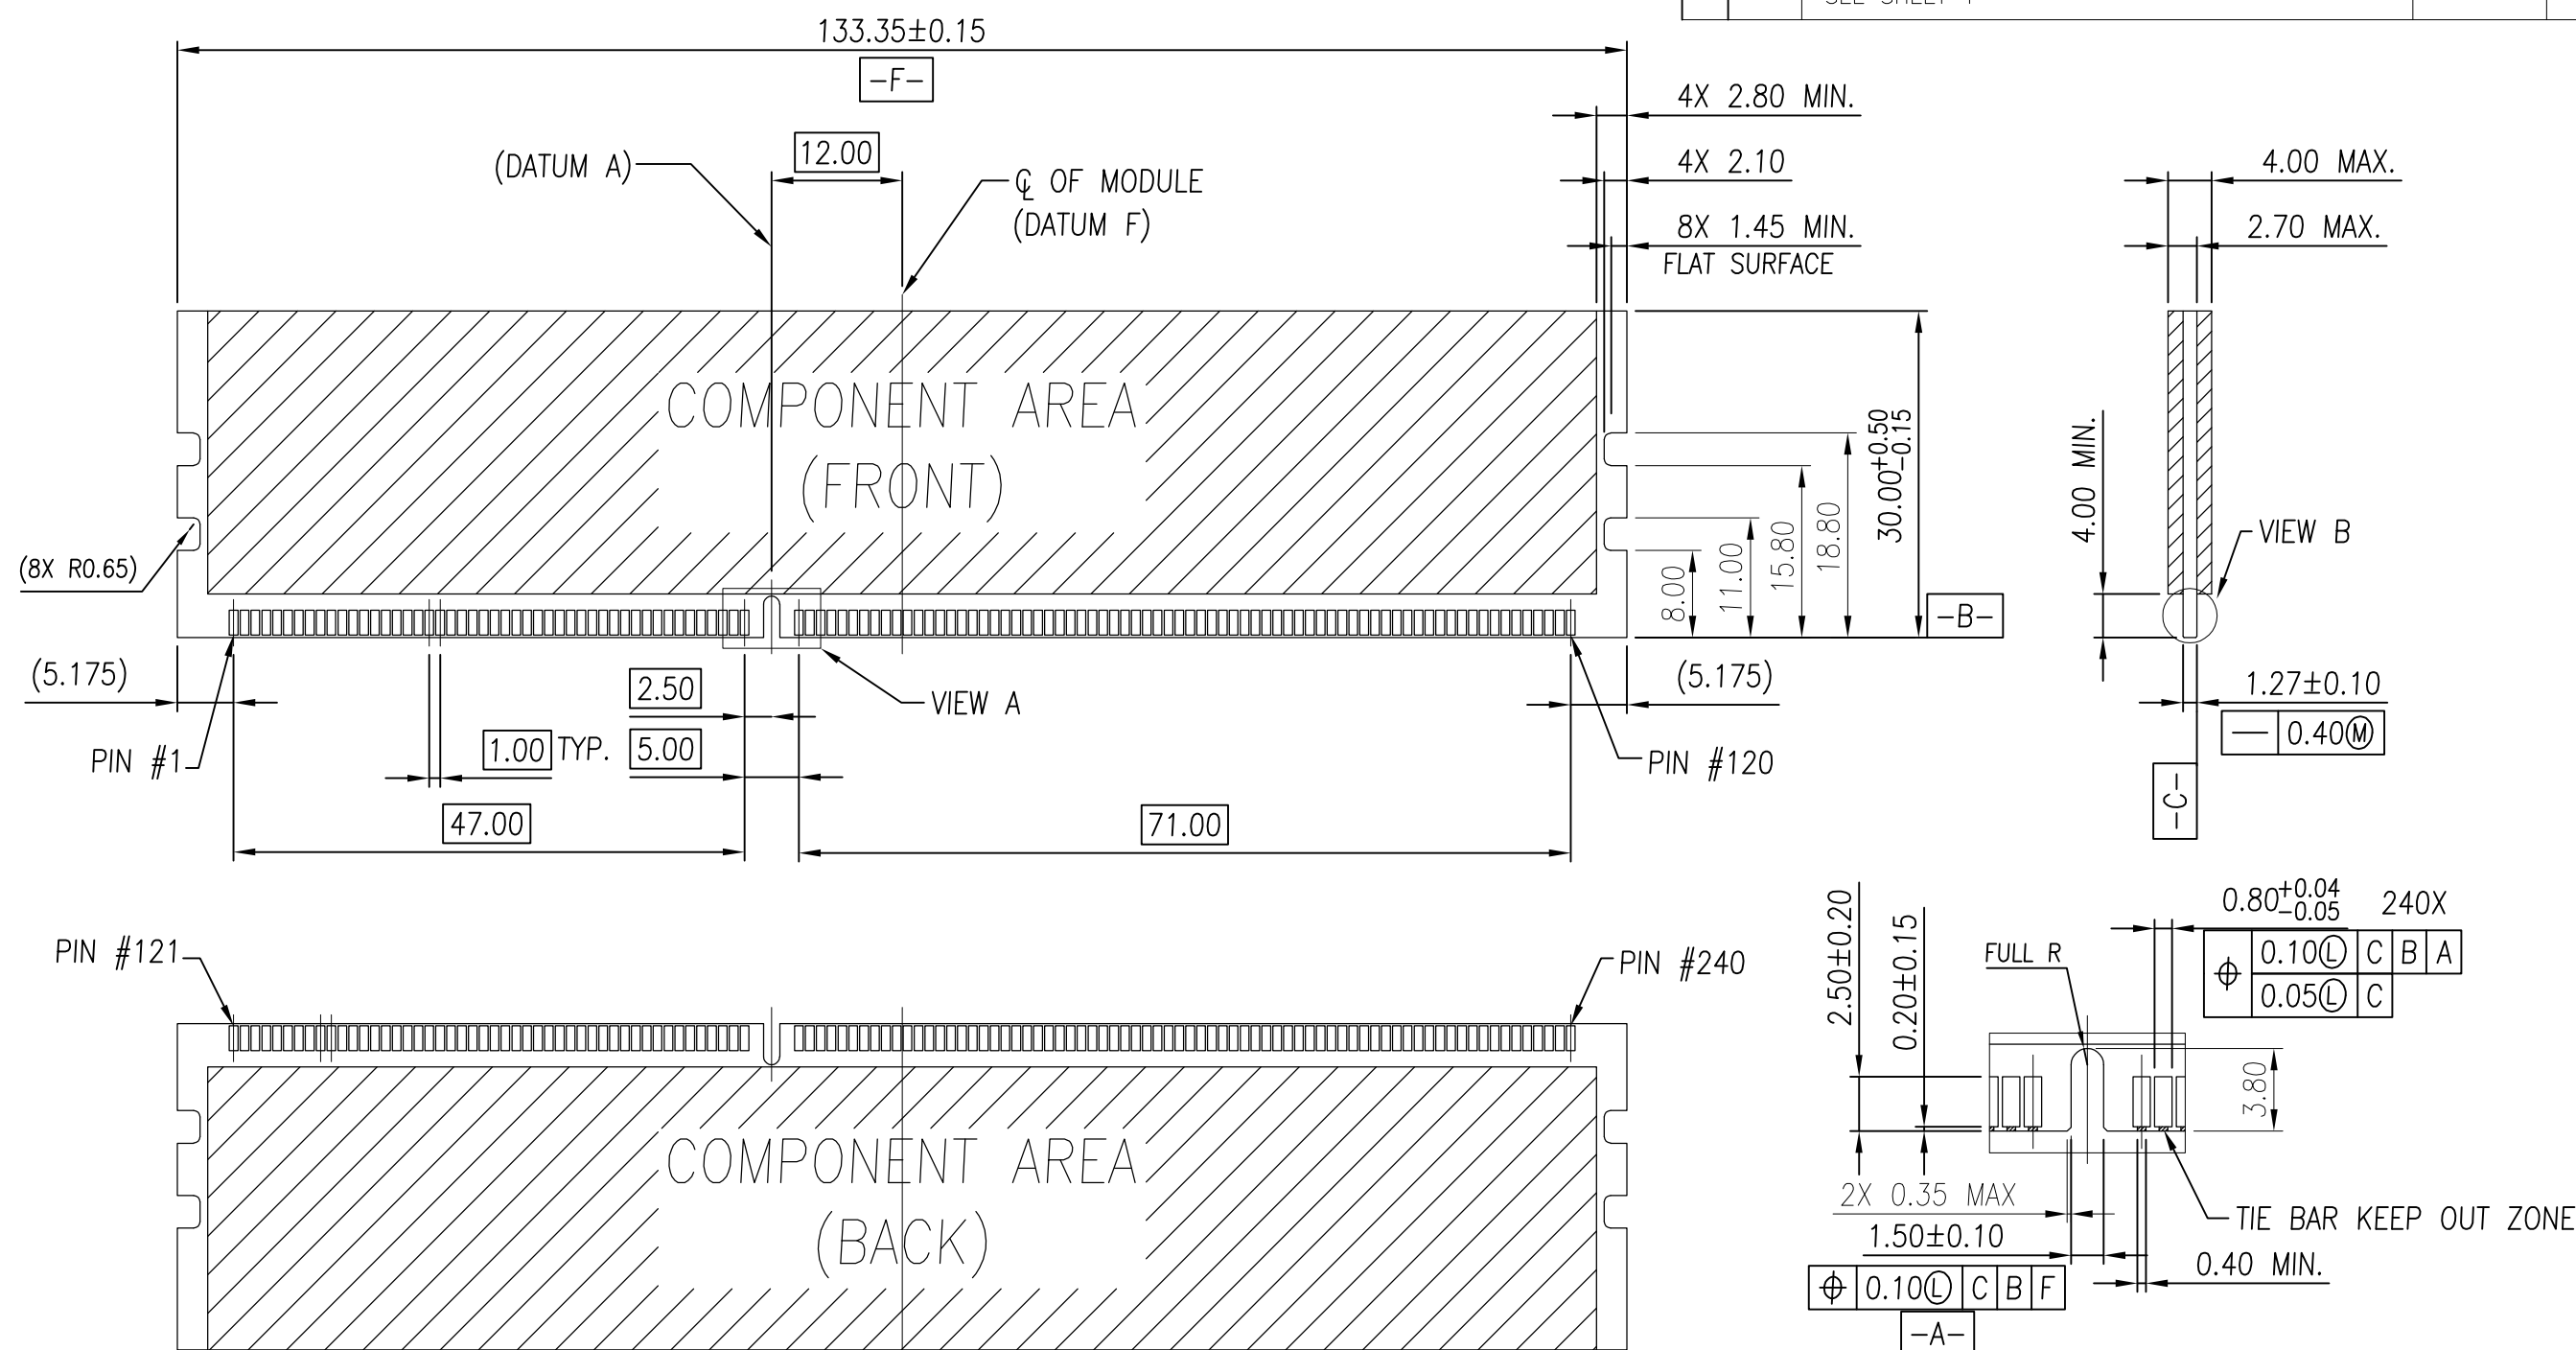VIEW B
SCALE 2:1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm



MATERIAL

SEE NOTE

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	$\pm -$
1 PLC	± 0.30
2 PLC	± 0.15
3 PLC	$\pm -$
4 PLC	$\pm -$
ANGLES	$\pm 1^\circ$

FINISH

SEE NOTE

DWN 30DEC2010

SIMON WU

CHK 30DEC2010

BILL WONG

APVD 30DEC2010

COREL WANG

PRODUCT SPEC

-

APPLICATION SPEC

-

WEIGHT

-

CUSTOMER DRAWING

STE

TE Connectivity

NAME

SOCKET ASSEMBLY
VLP DDR-III, T/H, 240P

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C-1932680

SCALE 3:2

SHEET 3 OF 6

REV B7

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

© COPYRIGHT — By —

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE



DWN

APVD

SEE SHEET 1


NOTES:

1. FOR STD VLP MODULE, THE LATCH OF CONNECTOR IS LOCKED BY UPPER NOTCH.

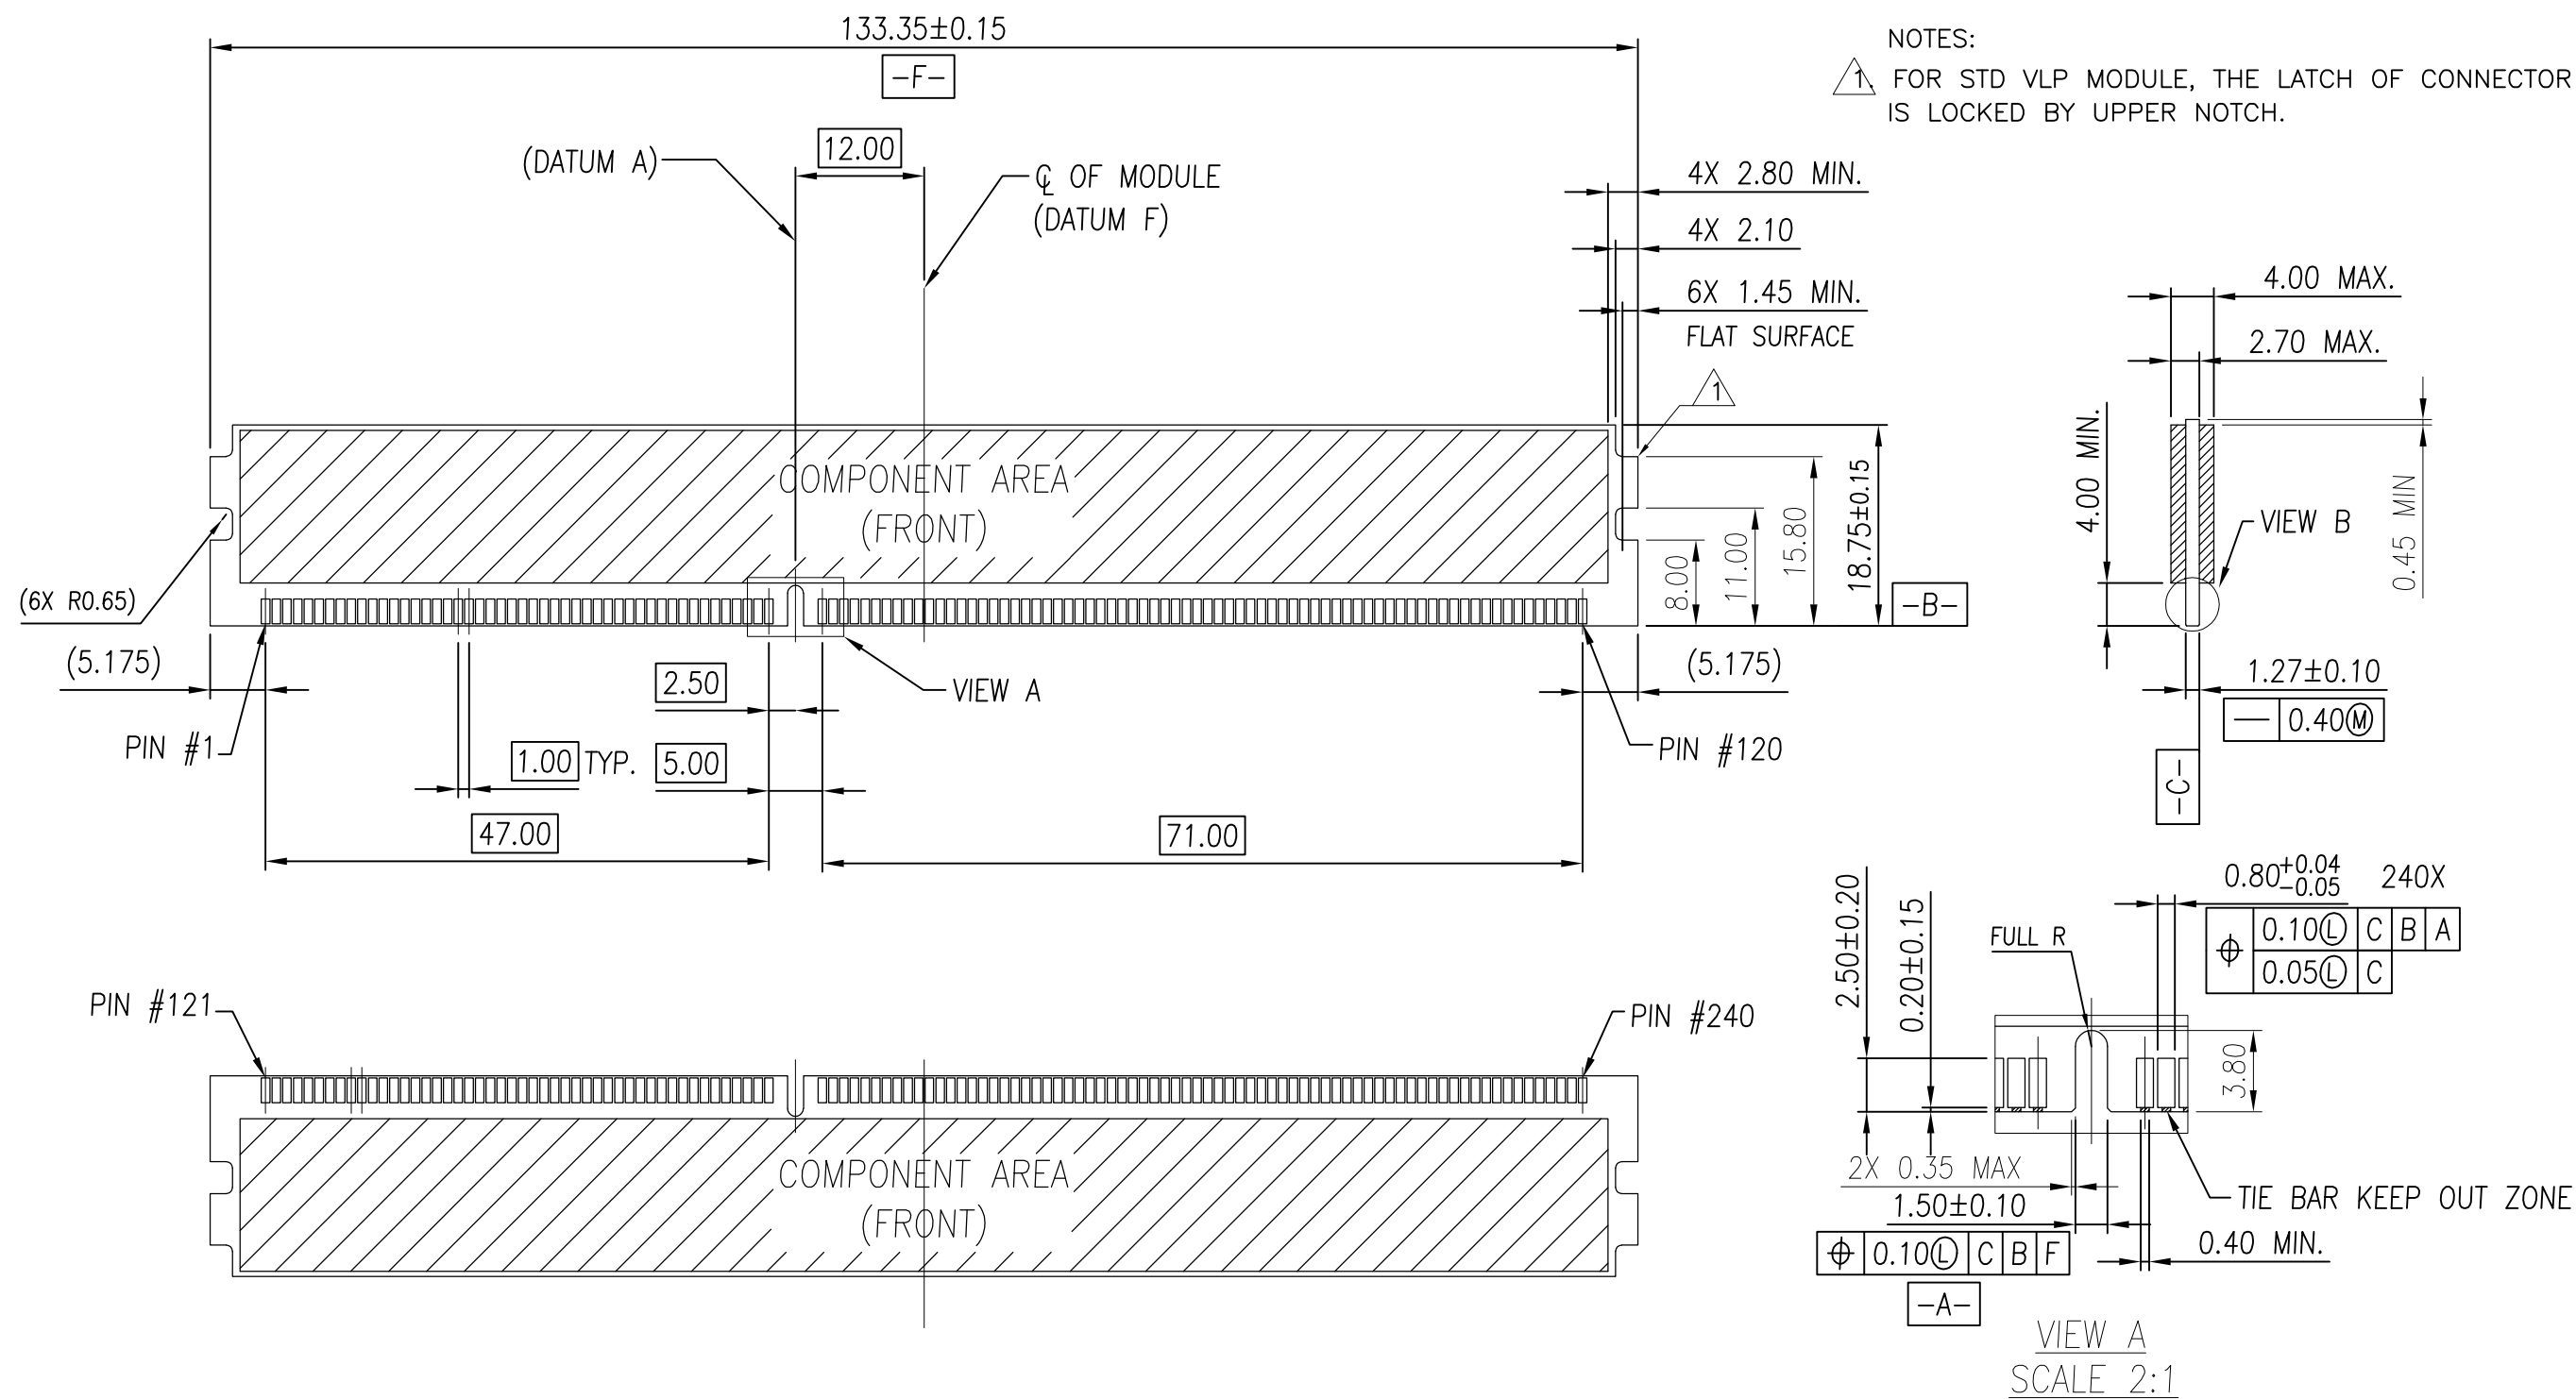

VIEW B
SCALE 2:1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL

SEE NOTE

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC $\pm -$
1 PLC ± 0.30
2 PLC ± 0.15
3 PLC $\pm -$
4 PLC $\pm -$
ANGLES $\pm 1^\circ$

FINISH

SEE NOTE

DWN 30DEC2010

SIMON_WU

CHK 30DEC2010

BILL_WONG

APVD 30DEC2010

COREL_WANG

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

STE

TE Connectivity

NAME

SOCKET ASSEMBLY
VLP DDR-III, T/H, 240P

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C-1932680

SCALE 3:2

SHEET 4 OF 6

REV B7

LOC	DIST	REVISIONS				
—	—	P	LTR	DESCRIPTION	DATE	APVD
		—	—	SEE SHEET 1	—	—

NOTES:

1. MATERIAL:

1.1 HOUSING: THERMOPLASTIC, UL94V-0; COLOR: SEE TABLE.

1.2 LATCH: THERMOPLASTIC, UL94V-0; COLOR: SEE TABLE.

1.3 CONTACT: COPPER ALLOY.

1.4 BOARDLOCK: COPPER ALLOY.
2. FINISH:

2.1 CONTACT:

GOLD PLATING THICKNESS ON CONTACT AREA: SEE TABLE.

THICKNESS 100u” MIN. MATTE-TIN PALTING ON SOLDER TAIL AREA.

THICKNESS 90u” MIN. NICKEL UNDERPLATING OVERALL FOR 20u” GOLDPLATING.

THICKNESS 50u” MIN. NICKEL UNDERPLATING OVERALL FOR OTHER GOLDPLATING.

SEALANT APPLY IN PLATING PROCESS.

2.2 BOARDLOCK:

THICKNESS 50u” MIN. NICKEL UNDERPLATING OVERALL.

THICKNESS 100u” MIN. MATTE-TIN PLATING OVERALL.

3. CONFORMS TO THE REQUIREMENTS OF
EIA/ECA-364-1000.01A (CONTROLLED ENVIRONMENT APPLICATIONS,
AND TE PRODUCT SPECIFICATION.)


4. LLCR SPEC.: 30mΩ MAX. INITIAL, THE CHANGE NOT GREATER THAN 20mΩ AFTER ALL ENVIRONMENT TEST.

5. LLCR SPEC.: 10mΩ MAX. INITIAL, THE CHANGE NOT GREATER THAN 10mΩ AFTER ALL ENVIRONMENT TEST.

SEE NOTE 5	4.00	4.00	30u” MIN	NATURAL	BLACK	2-1932680-3
SEE NOTE 5	2.67	3.50	15u” MIN	NATURAL	BLUE(2935U)	2-1932680-2
SEE NOTE 5	2.67	3.50	15u” MIN	NATURAL	BLACK	2-1932680-1
SEE NOTE 5	3.18	4.00	30u” MIN	BLACK	BLACK	2-1932680-0
SEE NOTE 5	3.18	4.00	20u” MIN	GREEN(375C)	BLACK	1-1932680-9
			15u” MIN	NATURAL	BLUE(2935U)	1-1932680-8
			15u” MIN	NATURAL	BLACK	1-1932680-7
			20u” MIN	NATURAL	BLACK	1-1932680-6
			20u” MIN	BLACK	BLACK	1-1932680-5
SEE NOTE 5	2.54	3.50	20u” MIN	GREEN(375C)	BLACK	1-1932680-4
			20u” MIN	NATURAL	BLACK	1-1932680-3
			20u” MIN	BLACK	BLACK	1-1932680-2
SEE NOTE 5	3.18	4.00	30u” MIN	NATURAL	BLACK	1-1932680-1
SEE NOTE 4	3.18	4.00	20u” MIN	GREEN(375C)	BLACK	1-1932680-0
			15u” MIN	NATURAL	BLUE(2935U)	1932680-8
			15u” MIN	NATURAL	BLACK	1932680-6
			20u” MIN	NATURAL	BLACK	1932680-4
			20u” MIN	BLACK	BLACK	1932680-2
LLCR SPEC.	DIM. L	DIM. D	CONTACT GOLD PLATING	LATCH COLOR	HOUSING COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm



TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± 0.30
2 PLC ± 0.15
3 PLC ± -
4 PLC ± -
ANGLES ± 1°

FINISH

SEE NOTE

DWN
SIMON WU
30DEC2010

CHK
BILL WONG
30DEC2010

APVD
COREL WANG
30DEC2010

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

 TE Connectivity

NAME

SIZE
A3

CAGE CODE
00779

DRAWING NO
C-1932680

RESTRICTED TO

CUSTOMER DRAWING

SCALE
3:2

SHEET
5 OF 6

REV
B7

