

MATERIAL SPECIFICATIONS:

Housing: LCP, UL-94V-0 rated
Contacts: Phosphor bronze, Tin plated

ELECTRICAL SPECIFICATIONS:

Rated current: UL = 5A / 22 - 26AWG
cUL = 5A / 22AWG, 3A 24 - 26AWG
IEC/EN = 3A
Rated voltage: UL/CUL = 320V, IEC/EN = 160V

MECHANICAL SPECIFICATIONS:

Applicable wire: 0.14 ~ 0.34mm² solid
26-22 AWG solid

Wire strip length: 4.5 - 5.5mm
Connection type: Cage clamp
Wire release: with tool
Solder temperature: 270°C max.

ENVIRONMENTAL SPECIFICATIONS:

Operating Temperature: -40°C ~ +105°C






RoHS
COMPLIANT

SAFETY AGENCY APPROVALS:

 STANDARDS: UL1977 / CSA-C22.2 No. 182.3

PACKAGING:

Tape & Reel: 800

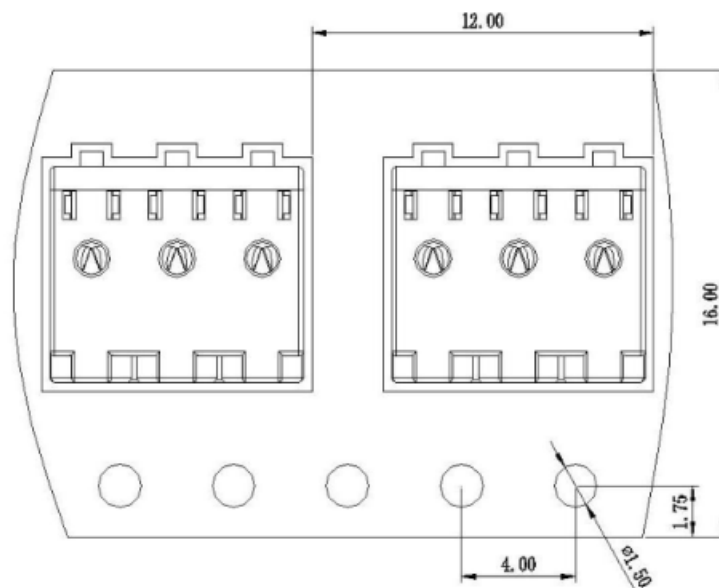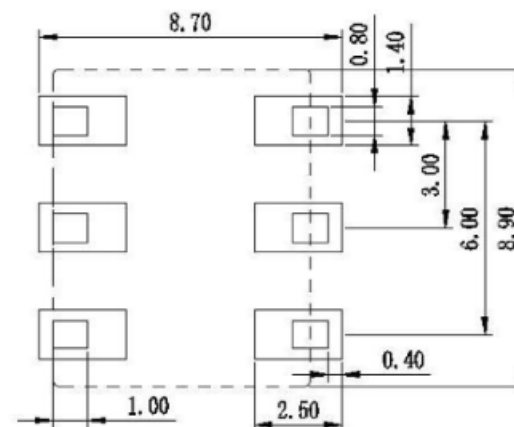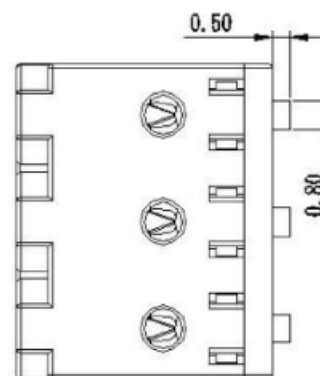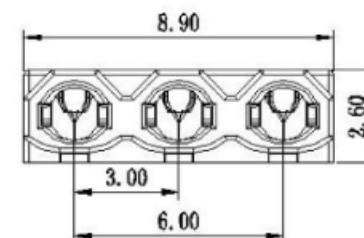

TOLERANCE
UNLESS OTHERWISE SPECIFIED
X ± 1
X.X ± 0.4
X.XX ± 0.13

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 3mm PITCH SMT MICRO TERMINAL BLOCK
THREE POLE; FOR LED APPLICATIONS

DRAWN BY PB DATE: 3/22/18
CHECK BY DATE:
APPR BY DATE:

PART #: PD-LTB3-3P

MC: B07A-3P

SCALE: NTS

ALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

SHEET
1 of 1

REV:

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Power Dynamics:](#)

[PD-LTB3-3P](#)