


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.12.22	阿树

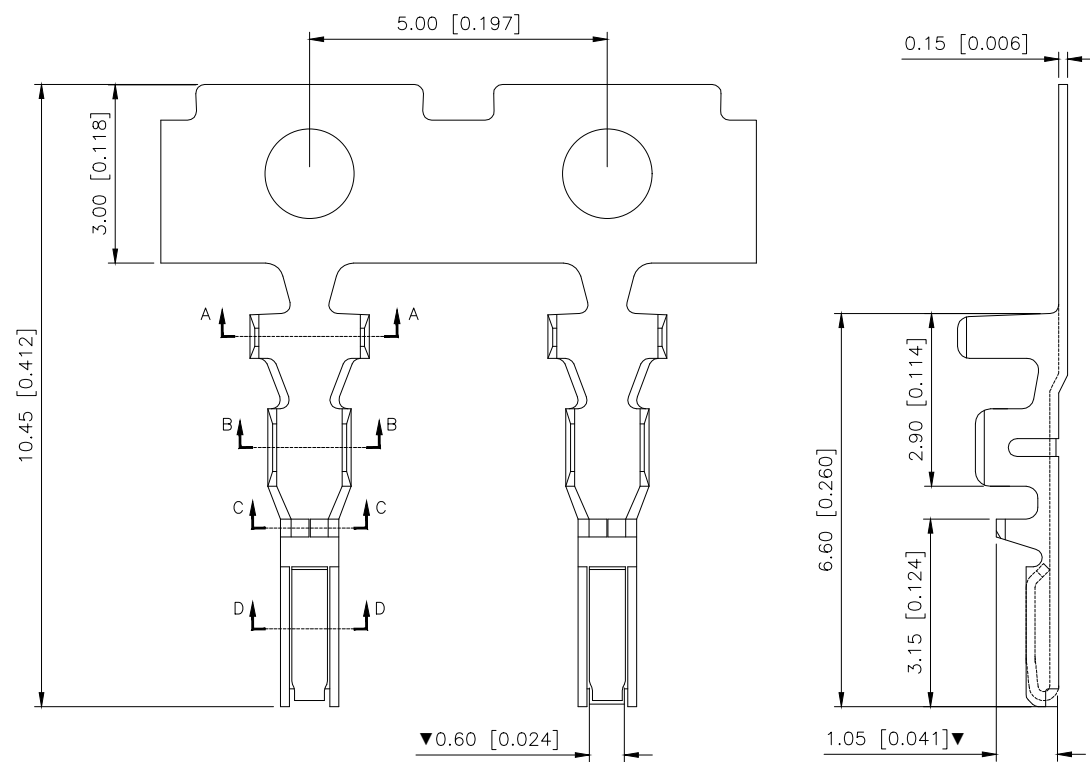


- SPECIFICATIONS
- Voltage rating:100VAC,DC
 - Current rating:2A,AC,DC
 - Withstanding Voltage:500V AC/minute
 - Temperature range:-25°C+85°C
 - Contact resistance:20mΩ max


PART NO.:

X 1501 T-P V01
① ② ③ ④ ⑤


- ① Series No
- ② Category:T-Terminal
- ③ Material:P-Phosphor bronze
- ④ Plating: SN-Tin-Plated
V01-Gold flash

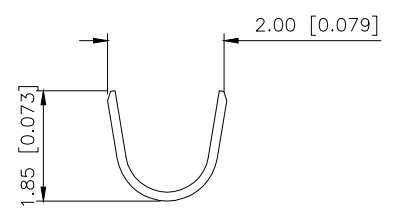


SECTION A-A

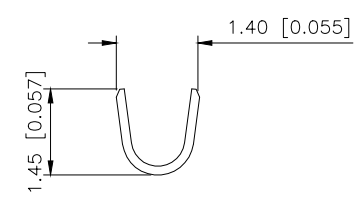

SECTION B-B



SECTION C-C



SECTION D-D

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



X1501T-PXX	Phosphor Bronze	Tin-Plated	AWG#24~28	X1501H
PART NO	Material	Finish(pin)	Wire Range	Suitable XKB Housing
DESIGN	阿树	VIEW:	MODEL TYPE: 1.5mm Crimp Style Housing	
CHECKED		UNIT: mm/in	PART NO.: X1501T-PV01	
APPROVED		SIZE: A4	DWG NO.:	
SCALE			PAGE	REVISION
N/A			1/1	A1