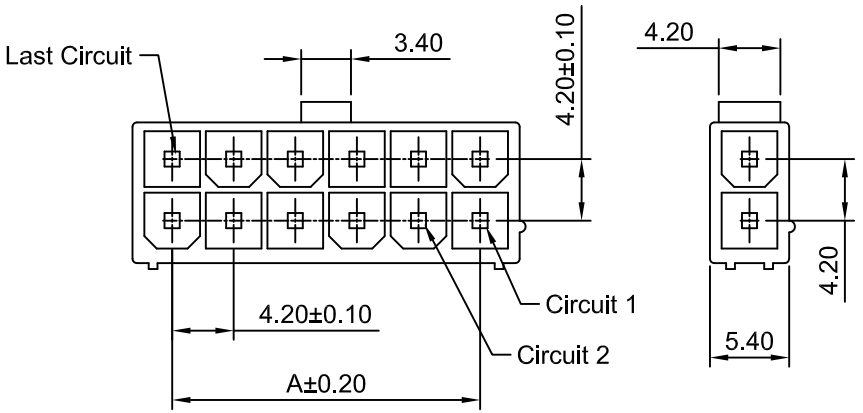



2x2P~2x12P

2x1P

Ordering Information:


C4201WRG-2xXP - *** - *** - ***
1 2 3 4


1.Part No.
2.Finish:
(Blank): Tin over Nickel
G: Gold over Nickel(Au:1μin[0.025μm])
G30: Gold over Nickel(Au:30μin[0.762μm],Mating Area)
3.Size D:
(Blank): 3.50mm
D22: 2.20mm
4.Packing:
(Blank): Bag
RE: Tape & Reel

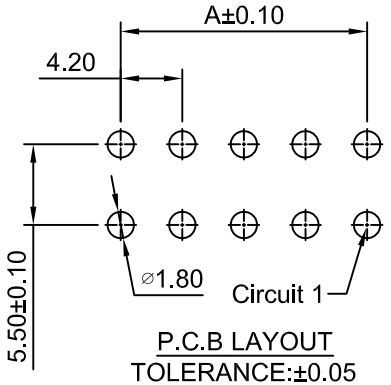

P.C.B LAYOUT
TOLERANCE:±0.05

SPECIFICATIONS:
Current Rating: 13A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass
Material: LCP,UL94V-0(Black)

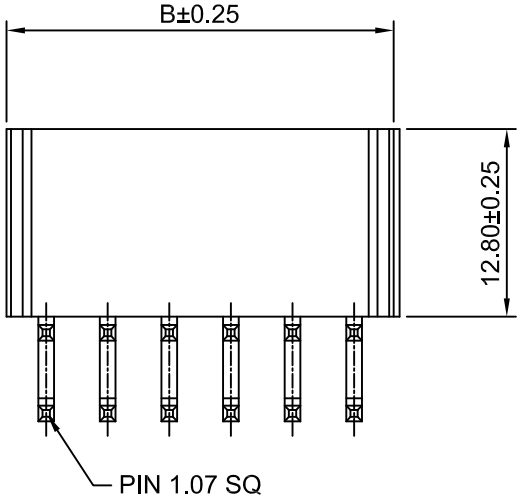

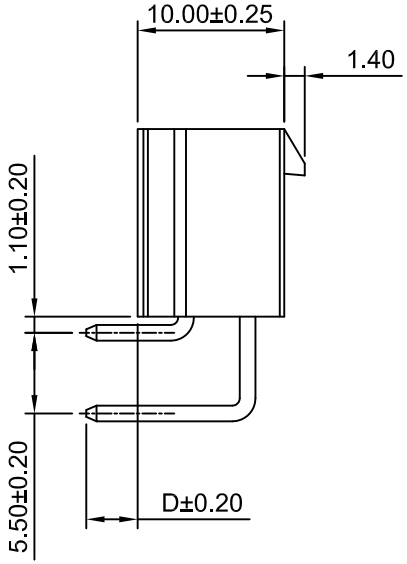

Ordering Information & Dimensions

Part No.	Dimensions(mm)	
	A	B
C4201WRG-2x1P	---	5.40
C4201WRG-2x2P	4.20	9.60
C4201WRG-2x3P	8.40	13.80
C4201WRG-2x4P	12.60	18.00
C4201WRG-2x5P	16.80	22.20
C4201WRG-2x6P	21.00	26.40
C4201WRG-2x7P	25.20	30.60
C4201WRG-2x8P	29.40	34.80
C4201WRG-2x9P	33.60	39.00
C4201WRG-2x10P	37.80	43.20
C4201WRG-2x11P	42.00	47.40
C4201WRG-2x12P	46.20	51.60

REV	DESCRIPTION	DATE
A2	ADD "-D22" TYPE	2023.03.14
A1	CHANGE THE DRAWING	2019.03.27
A0	NEW RELEASE	2018.12.27

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2:1	1 of 1
DRN	CHK	APVD
Dengchun YI	DlanKui Wan	Jack YIn

General Tolerance
x.x±0.25
x.xx±0.20
x.xxx±0.15
ANGLES ±1°

THIRD ANGLE PROJECTION

TITLE
4.20mm PITCH
RIGHT-ANGLE DUAL ROW WAFER

DRAWING NO
C4201WRG-2xXP

REV
A2