

You are here: [Products](#) » [Heatsinks f.cool](#) » [Profile heatsinks and fluid coolers](#) » [Extruded heatsinks for PCB mounting](#) » [SK 415 ...](#) » [SK 415](#)



▼ Heatsinks f.cool

- ▼ Profile heatsinks and fluid coolers
 - Standard extruded heatsinks
 - Extruded heatsinks for lock-in retaining spring
 - [Extruded heatsinks for PCB mounting](#)
 - Extruded heatsinks for DC/DC converter
 - Retaining springs for transistors
 - U-Extruded heatsinks
 - Die-cast heatsinks
 - Fin coolers
 - Fluid coolers
 - Aluminium flat-, quadrangular-, angled-, U- and T-profiles
- Heatsinks and active heatsinks for processors
- Board Level heatsinks
- Cooling aggregates
- Accessories for electronic components

► Cases f.case

► Connectors f.con

Extruded heatsinks for PCB mounting


SK 415 ...

SK 415 150 SA

219 x 15 mm, for 19" plug in unit

Data sheet

add to request

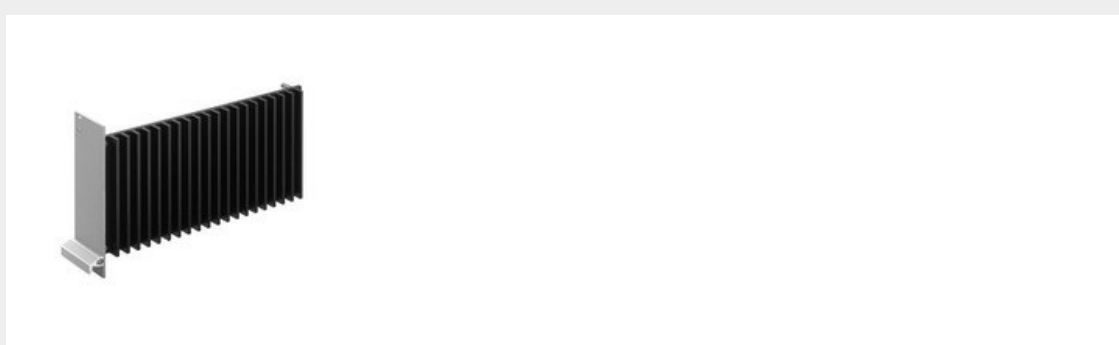

Features

Technical Drawing

Service

Accessories / related products

width	219 mm
height	15 mm
plate thickness	4 mm
length	150 mm
thermal resistance R_{th}	1.9 - 1 K/W
surface	black anodised