

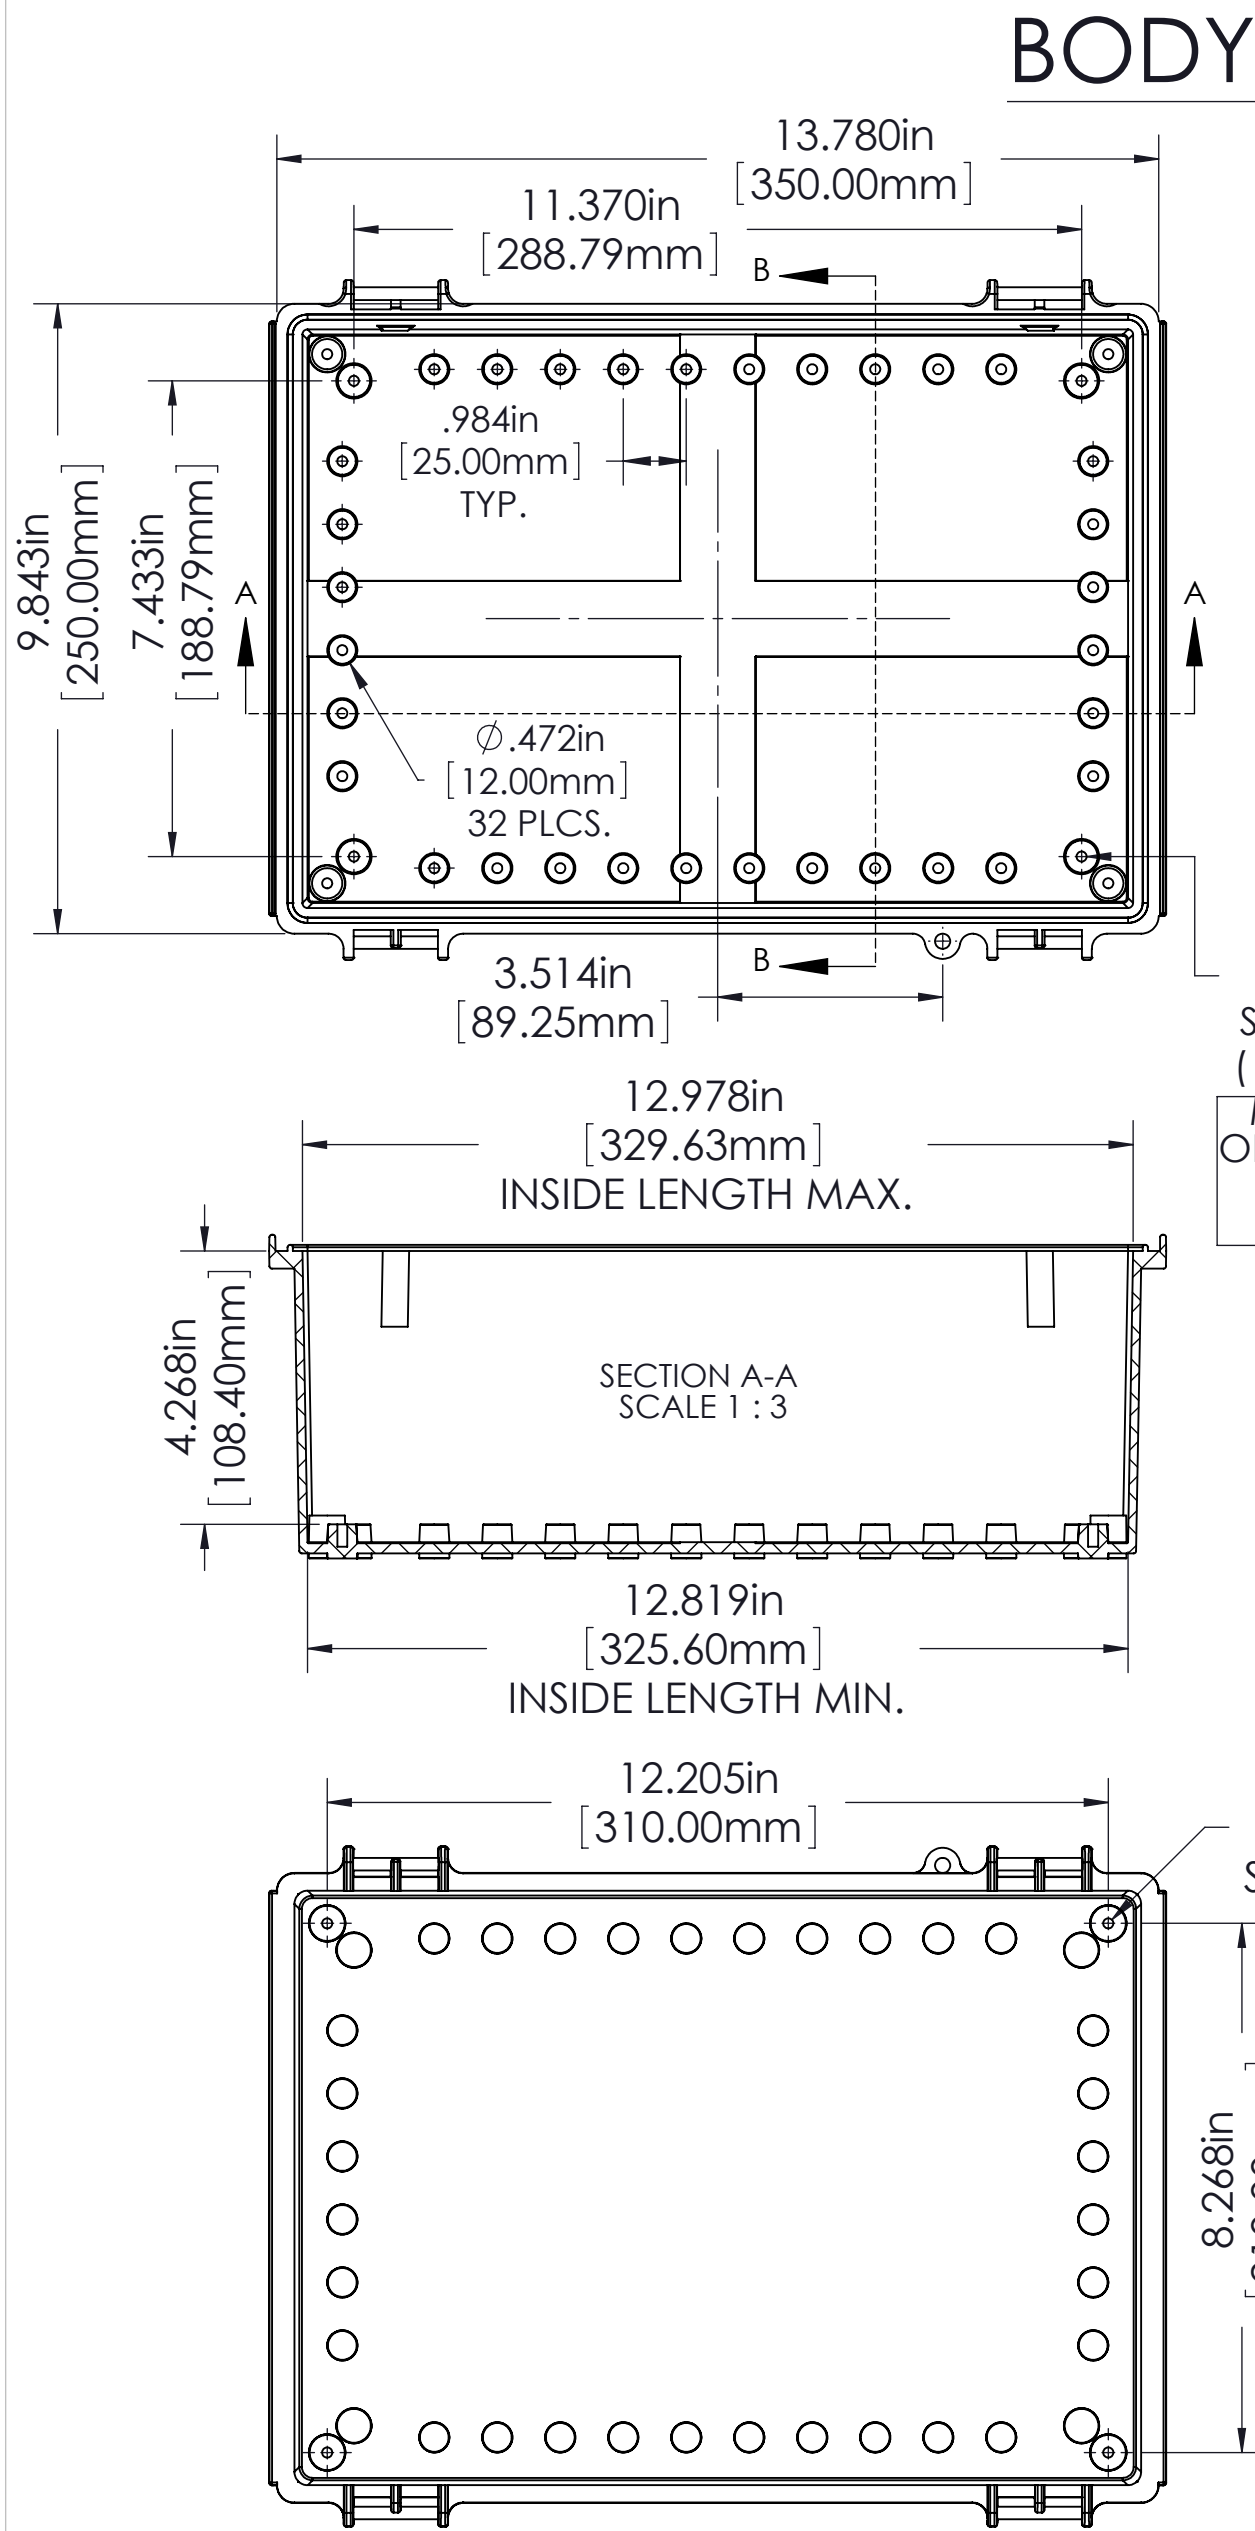


PART NAME	NBF SERIES PLASTIC NEMA BOX		PART No.	NBF-32022 & NBF-32122 & NBF-32222 & NBF-32322 & NBF-32422		REVISION DATE	8/12/2010
MATERIAL	FLAMMABILITY RATING	CONTINUOUS OPERATING TEMP.	FINISH: BODY_____ LIGHT GRAY COVER_____ LIGHT GRAY OR CLEAR LATCHES & HINGES_____ PLASTIC WALL MOUNTING BRACKETS__ STAINLESS STEEL & HARDWARE COVER 13.780in [350.00mm] C 1.181in [30.00mm]				
ABS	UL94-HB	-40°C ~ +60°C / -40°F ~ 140°F					
CLEAR PC	UL94-V0 UV STABILIZED	-40°C ~ +130°C / -40°F ~ 266°F					
ABS / PC BLEND	UL94-5VA	-40°C ~ +85°C / -40°F ~ 185°F					
PBT / PC BLEND	UL94-5VA + UV (f1)	-40°C ~ +75°C / -40°F ~ 167°F					

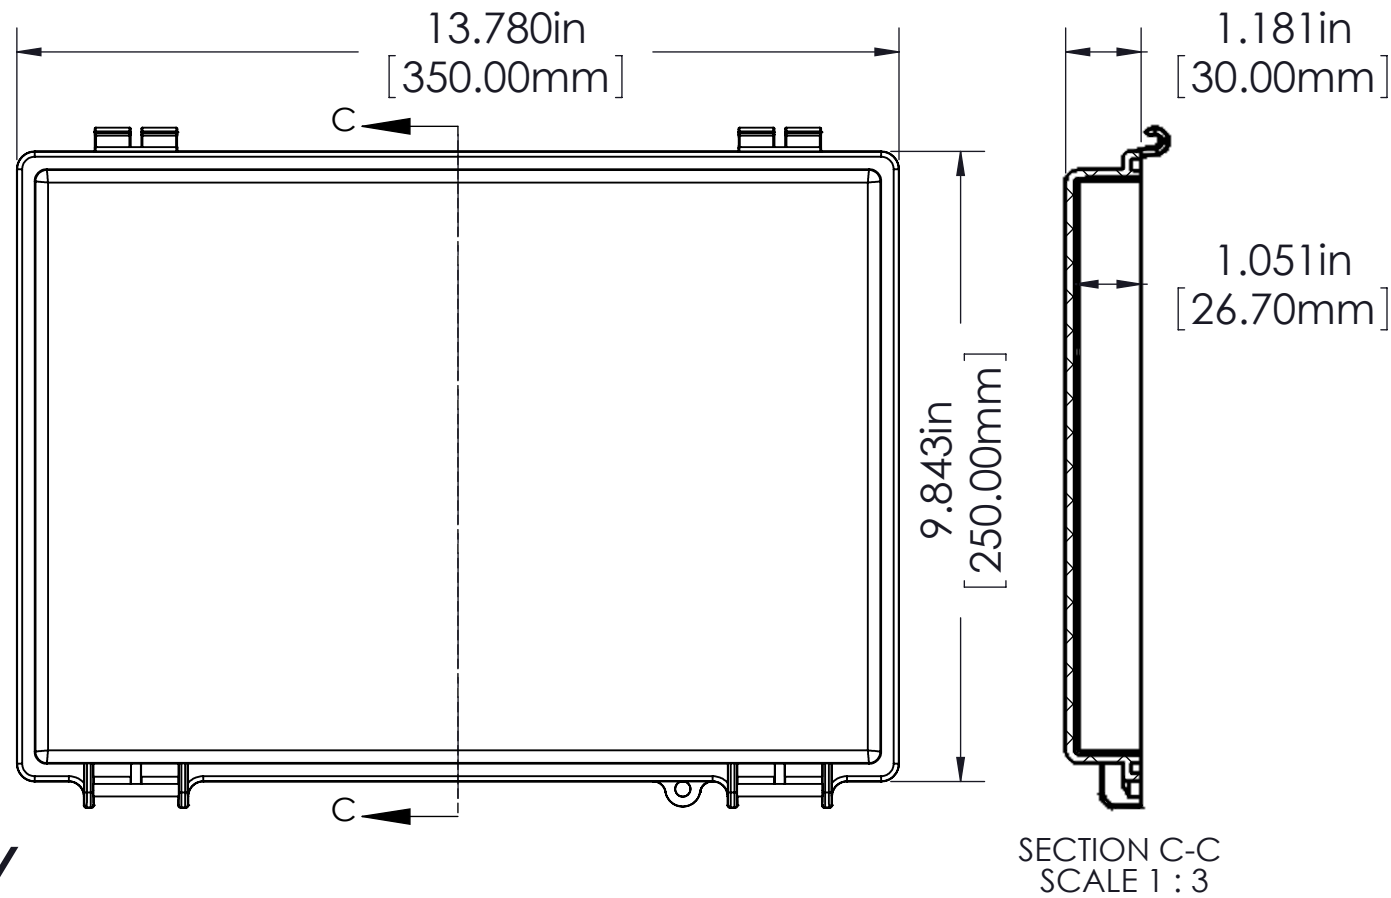

$\phi .157$ in [4.00mm]
FOR M5 x 10mm LG. SELF-TAPPING SCREWS (ABS VERSIONS ONLY)
M5 THREADED INSERTS ON ALL OTHER VERSIONS USE M5 x 8mm LG. MACHINE SCREWS.

$\phi .157$ in [4.00mm]
FOR M5 x 10mm LG. SELF-TAPPING SCREWS 4 PLCS.

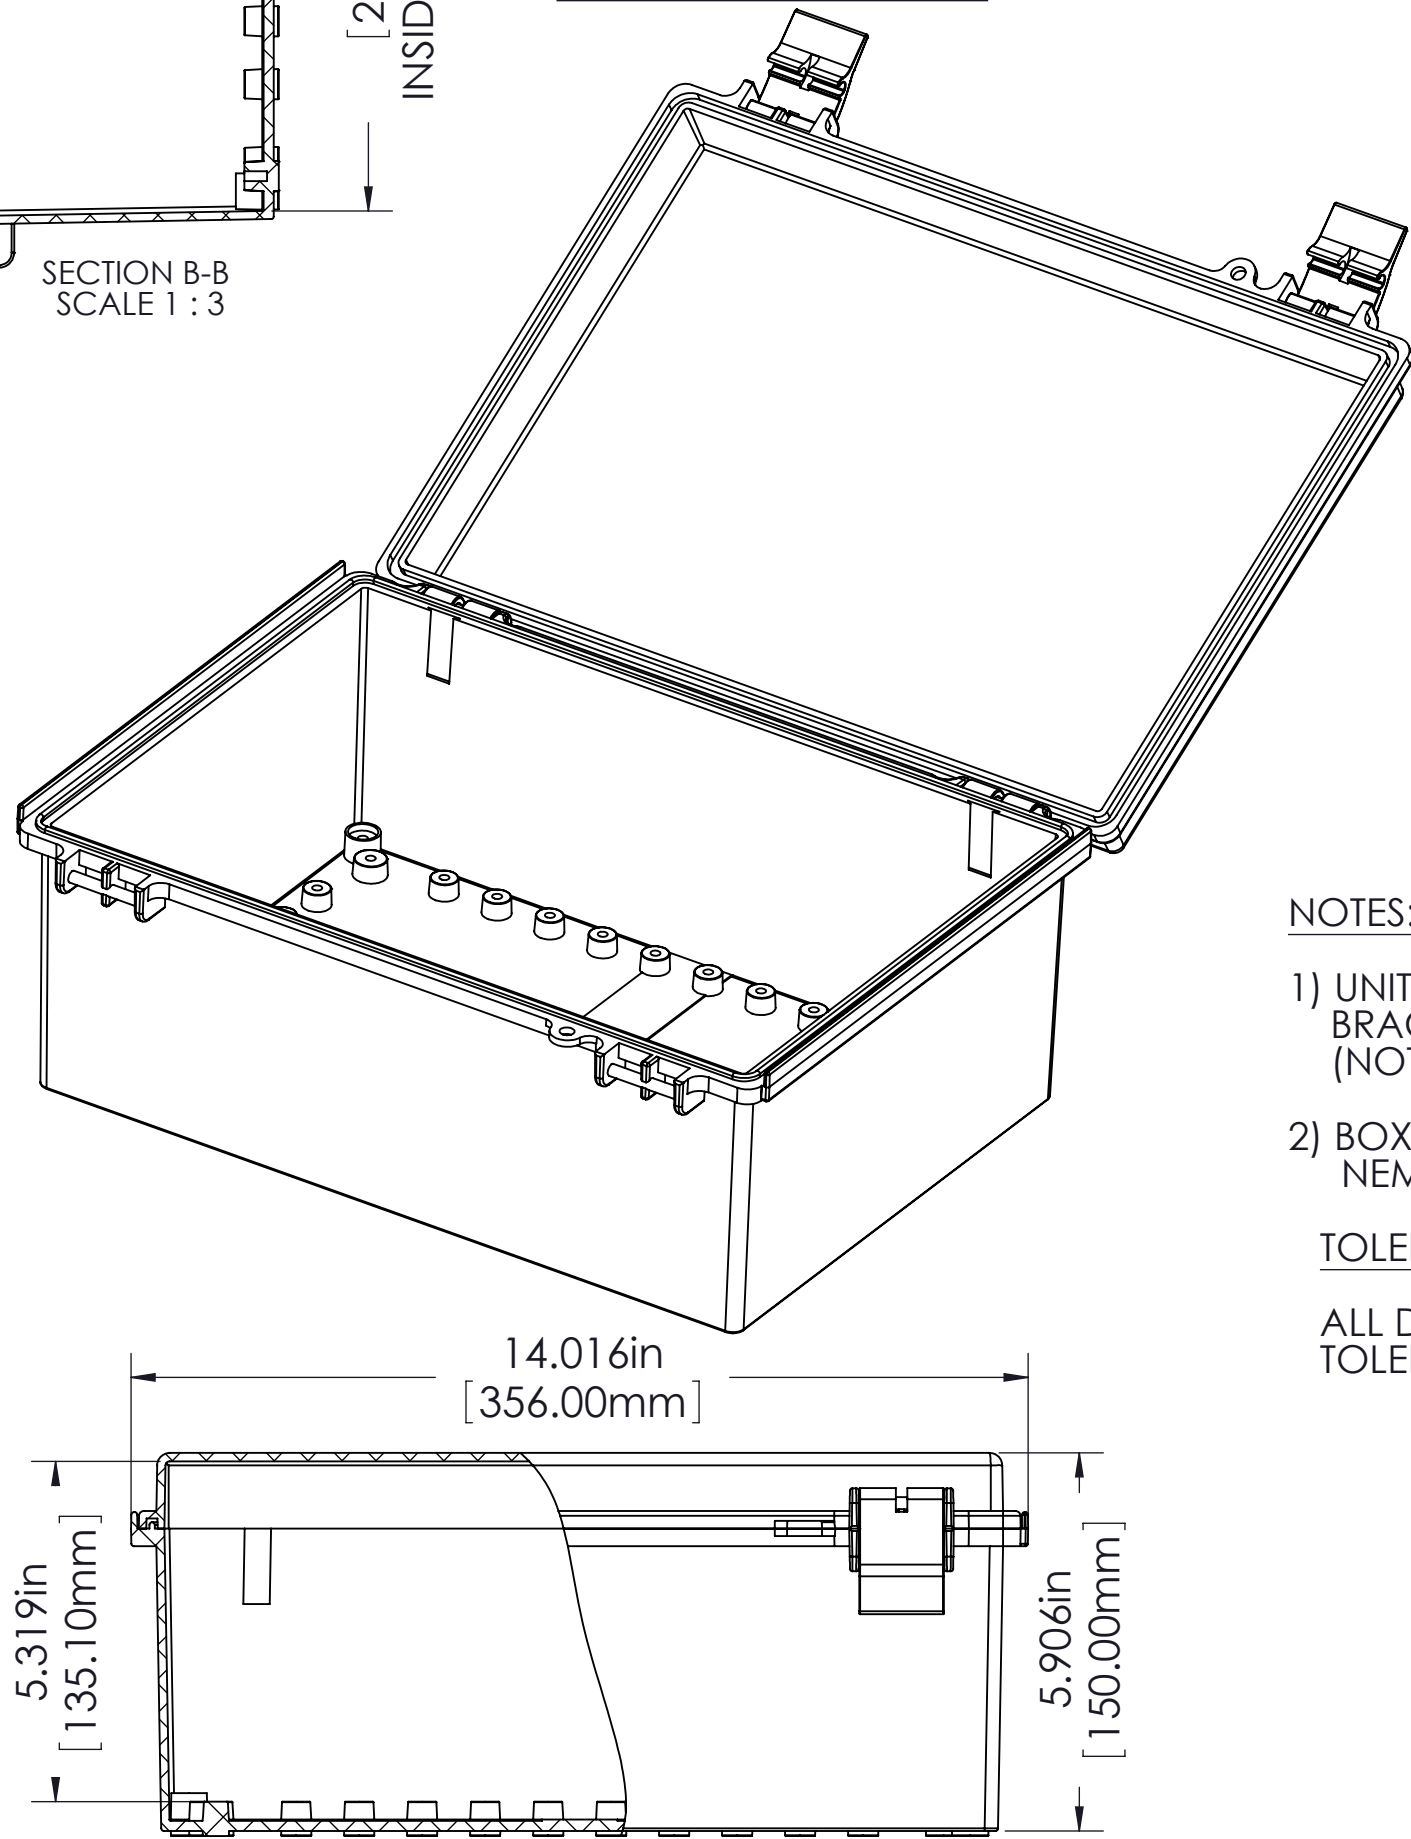

NOTES:

- 1) UNIT COMES COMPLETE WITH (4) WALL MOUNTING BRACKETS & (4) M5 x 10mm LG. SELF-TAPPING SCREWS. (NOT SHOWN)
- 2) BOXES DESIGNED TO MEET FOLLOWING STANDARDS: NEMA 1,2,4,4X, AND IEC529-IP65 REQUIREMENTS.

TOLERANCE:

ALL DIMENSIONS HAVE ± 0.039 in [± 1 mm]
TOLERANCE UNLESS OTHERWISE SPECIFIED.

PART NO.	MATERIAL		USE
	BODY	COVER	
NBF-32022	ABS	ABS	INDOOR
NBF-32122	ABS / PC	ABS / PC	INDOOR
NBF-32222	ABS / PC	CLEAR PC	INDOOR
NBF-32322	PBT / PC	PBT / PC	OUTDOOR
NBF-32422	PBT / PC	CLEAR PC	OUTDOOR