
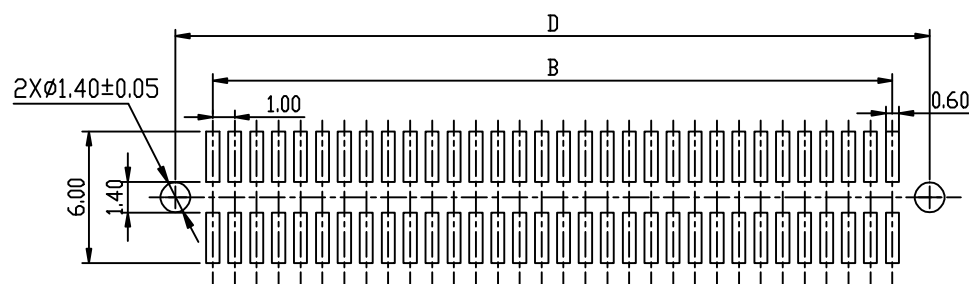
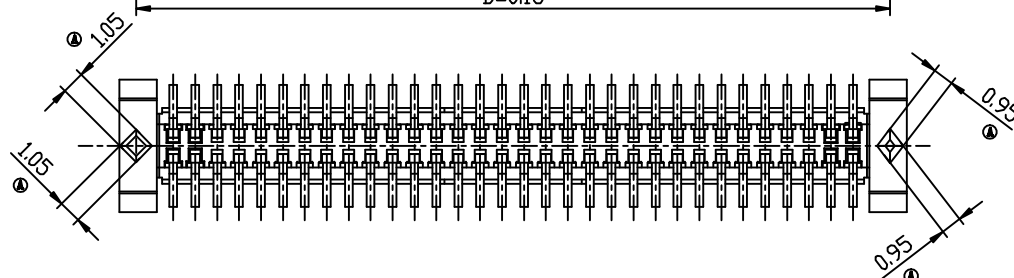
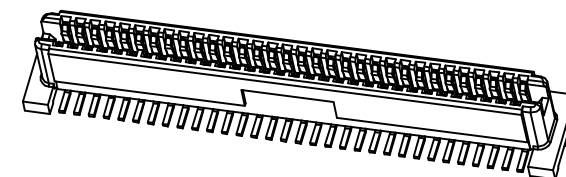


Current Rating:1.0A AC/DC
Voltage Rating:100V AC/DC
Contact Resistance:30m ohm. Max
Withstanding Voltage:250V(r.m.s) For one Minute
Operating Temperature Range: -55°C to 125°C
Materials:
Insulator:High Temp. Plastic(LCP UL94V-0)
Color: **Black** Color
Contact :Phosphor Bronze



RSMEZ F 100 - 2 XX V 10 G30 T

系列	母端	间距	排数	针芯数	垂直 贴装	合高	镀金 30μ"	卷带 包装
----	----	----	----	-----	----------	----	------------	----------

Number of Position	A	B	C	D
50	28.90	24.00	27.22	27.40
64	35.90	31.00	34.22	34.40



标准 (ANSI):	比例 (Ratio):	单位 (Units):	张数 (Count):	纸张 (Paper):
	1:1	mm	1 OF 1	A4

**RoHS
Compliant**
2012/19EC



①	修改定值注		21.02.2
修改	修改摘要	姓名	日期