

标 记  
MARKECN编号/变更内容  
ECN NO/DEFINITION修 改  
REVISE日 期  
DATE核 准  
APPROVE

## Materials and Electroplating

- ①. Plastic body: PA66
- ②. Clip: Copper, nickel plated
- ③. Square box: Copper, nickel plated
- ④. Plastic cover plate: PA66
- ⑤. Screw: M2.0, iron, galvanized, straight groove

## Electrical performance

Rated voltage: 300V

Rated current: 8A

Contact resistance: 20m  $\Omega$  (Max)Insulation resistance: 500M  $\Omega$  \ DC500V

Voltage endurance: AC1500V \ 1Min





Using wire diameter: 28-16AWG 1.5mm<sup>2</sup>

## mechanical properties

Temperature range: -40  $^{\circ}\text{C}$ ~+105  $^{\circ}\text{C}$ Instantaneous temperature: +250  $^{\circ}\text{C}$  for 5 econds

Torque: 0.2Nm (1.77Lbin)

Stripping length: 6-7mm

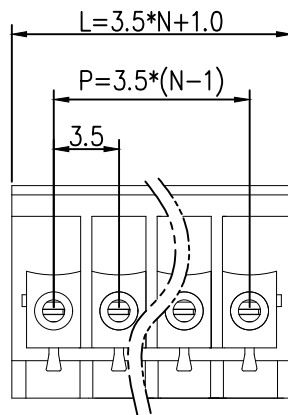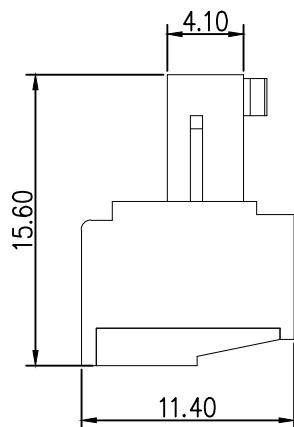

|    |     |      |       |     |
|----|-----|------|-------|-----|
| 2  | 方盒  | 铜    | 镀镍    |     |
| 1  | 底座  | PA66 | 绿色    |     |
| 序号 | 品 名 | 材 质  | 电镀/颜色 | 备 注 |



深圳市虹成电子有限公司

|                |                 |
|----------------|-----------------|
| 品 名<br>TITLE   | 接线端子            |
| 料 号<br>PART NO | HC-JXDZK-3.5-2P |

GENERAL TOLERANCES  
(UNLESS SPECIFIED)比 列  
SCALE

1:1

| 公差参数   |       |       |
|--------|-------|-------|
| 2-6P   | ±0.10 | ±0.20 |
| 7-12P  | ±0.20 | ±0.30 |
| 13-18P | ±0.25 | ±0.40 |
| 19-24P | ±0.30 | ±0.50 |

X.X ±0.35  
X.XX ±0.25  
X.XXX ±0.15单 位  
UNIT  
MM  
张 数  
PART NO  
1 OF 1  
版 本  
REV  
A制 图  
DRAW  
审 核  
CHECKED  
批 准  
APPROVEAhYe  
夏操云  
赵亮亮